

Q-BIC™ RSQB/RSQBD/ RSQB2 Series



Surface Mount,
Remote Fixture


FEATURES

- Cubic, vandal-resistant surface-mounted fixture
- Single, twin or double cube with center body
- Frosted polycarbonate cube
- CSA certified to C22.2 No. 141-15

See warranty details at: www.tnb.ca/en/brands/lumacell

DIMENSIONS

Dimensions are approximate and subject to change.

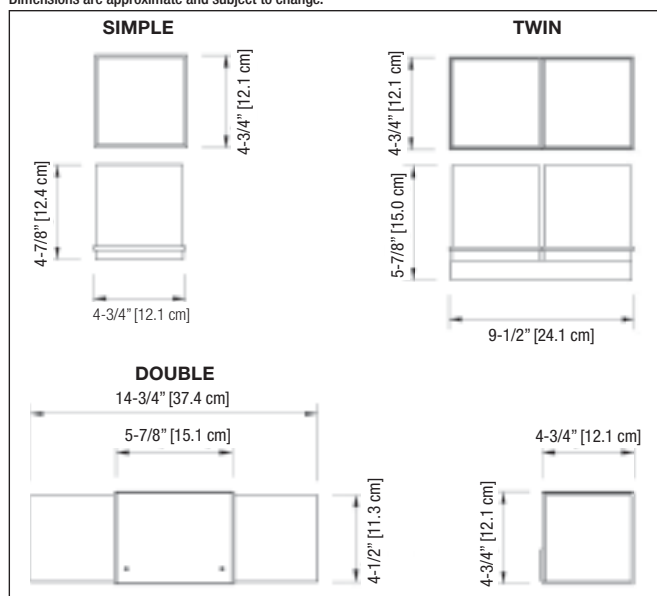

TYPICAL SPECIFICATIONS

Remote heads Series Q-BIC™ shall be comprised of one (single) or two (double or twin) 12W adjustable heads with halogen lamps. Each lamp shall be housed in an impact-resistant polycarbonate cube. The cube lens shall be frosted to diffuse the light. Heads shall provide mounting holes for installation to a standard octagonal box

The remote fixtures shall be certified to CSA 22.2 No. 141-15.

The remote unit shall be the Lumacell® model: RSQ _____ X

WIRE GUARDS

460.0035-L	Wall Mount (RSQB)
460.0031-L	Wall Mount (RSQBD)
460.0080-L	Wall Mount (RSQB2)

REPLACEMENT LAMPS

MODEL	AC SPECS	DC SPECS
570.0016-L	Mini tungsten, wedge base	6V-9W
580.0079-L	MR16, flood	6V-10W
580.0100-L	MR16, LED	24V-6W

See the complete list p. 152-154.

IN THE SAME FAMILY:



- Q-BIC™ Series Battery Unit
p. 98-99

ORDERING INFORMATION

SERIES	NUMBER OF HEADS	COLOUR	OPTIONS	
RSQB = single cube RSQBD = double cube RSQB2 = twin cube	LD1 = MR16 LED, 6V-4W LD7 = MR16 LED, 12V-4W LD9 = MR16 LED, 12V-5W LD10 = MR16 LED, 12V-6W LD13 = MR16 LED, 24V-4W LD14 = MR16 LED, 24V-6W LD26 = MR16 LED, 120V-4W M6V6W = MR16 halogen, 6V-6W M6V10W = MR16 halogen, 6V-10W M12V12W = MR16 halogen, 12V-12W M12V35W = MR16 halogen, 12V-35W M12V50W = MR16 halogen, 12V-50W M24V20W = MR16 halogen, 24V-20W M24V35W = MR16 halogen, 24V-35W M24V50W = MR16 halogen, 24V-50W T6V9W = tungsten, 6V-9W, wedge base T12V9W = tungsten, 12V-9W, wedge base T12V18W = tungsten, 12V-18W, wedge base T24V9W = tungsten, 24V-9W, wedge base T24V18W = tungsten, 24V-18W, wedge base	6V8W = halogen, 6V-8W, bi-pin 12V8W = halogen, 12V-8W, bi-pin 12V12W = halogen, 12V-12W, bi-pin 12V20W = halogen, 12V-20W, bi-pin 24V20W = halogen, 24V-20W, bi-pin M120V20W = MR16, GU10, 120V-20W M120V35W = MR16, GU10, 120V-35W	Blank = factory white BK = black	Blank = no options TP = tamper proof screws * 690.0454-L= tamper-proof bit (sold separately)

EXAMPLE: RSQBT6V9W