



N

new product

LRL Series

Vandal resistant linear remote fixture




FEATURES

- Easily adjustable LED strips for multiple beam angles
- 1200-1300 lumen output
- White high impact thermoplastic housing
- Frosted lens
- Impact tested to meet IK10¹
- Standard surface ceiling and wall mount
- Optional accessory: semi-recessed ceiling mount
- Compatible with Lumacell® 12 and 24 volt battery units
- Universal voltage 120V through 347V 60Hz, 12-24VDC
- Rated for -20°C to 45°C
- Suitable for wet locations
- Meets IP65 rating
- ROHS compliant
- cUL approved to CSA C22.2 No, 141-15
- **See warranty details at: www.lumacell.ca**

¹IK ratings refer to impact tests. IK10= Protected against 20 joules of impact (equivalent to 5KG of mass dropped from 40cm high)


DIMENSIONS

Dimensions are approximate and subject to change.

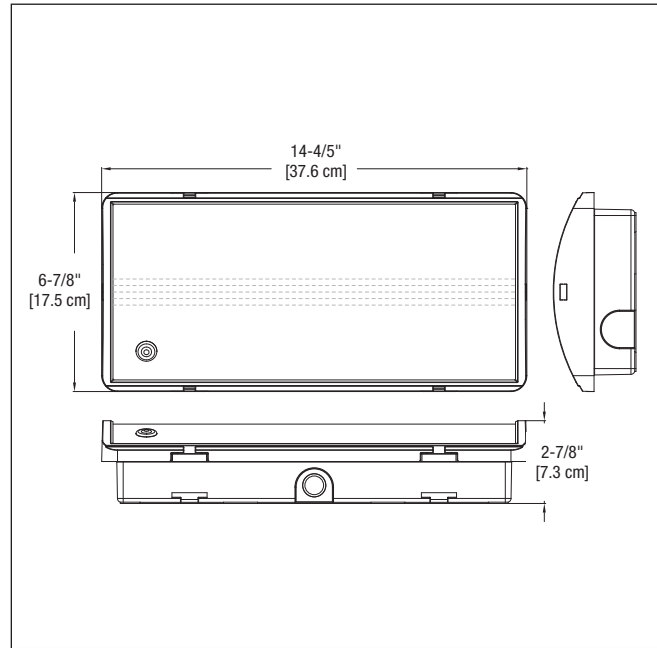

SPACING

MOUNTING TYPE	SPACING AT 9FT MOUNTING	LUMENS
Ceiling mount	62'	1300
Wall mount	53'	1200

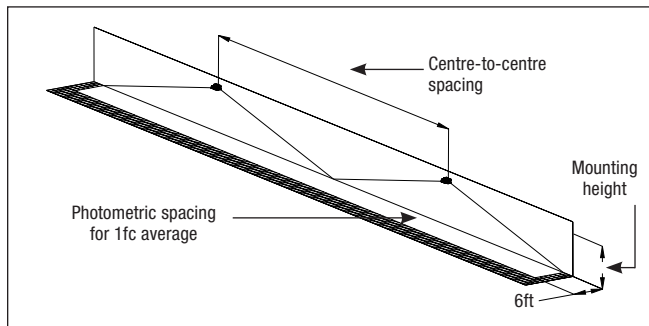

POWER CONSUMPTION

	VOLTAGE	WATTAGE
AC	120-347VAC	14 watts
DC	12-24VDC	13 watts

ACCESSORIES (order as a separate item)

DESCRIPTION	ORDERING CODE
Semi recessed mounting bracket	KIT-SR-L

ORDERING INFORMATION

SERIES	
LRL= remote linear	-ACDC= ACDC 120-347VAC, 12-24VDC

EXAMPLE: LRL-ACDC