



# CSL3000 SERIES

Edge-Lit "Sortie" Sign



Type: \_\_\_\_\_  
 Project/Location: \_\_\_\_\_  
 Contractor: \_\_\_\_\_  
 Prepared By: \_\_\_\_\_  
 Date: \_\_\_\_\_  
 Model No.: \_\_\_\_\_

## TYPICAL SPECIFICATIONS

Supply and install the **Ready-Lite® CSL3000 Series** LED "SORTIE" Exit Sign.

The equipment shall operate with universal two-wire AC input voltage from 120VAC to 347VAC at less than 4.5W and universal two-wire DC input voltage from 6VDC to 36VDC at less than 2.5W for single or double face legend. The housing assembly shall be fabricated of aluminum and consist of a universal aluminum back box. The back box shall be provided with conduit knockouts on top, back, and end. The trim plate shall have a round shape and attach to the housing assembly with two (2) torsion spring retainers, thereby eliminating all visible screws or hardware. The LED light strip shall be contained within the trim plate. Red LED technology shall be **ALINGAP**. The polished acrylic face panel shall have precision etched 6" high, 3/4" stroke red letters with a white, clear or mirror background. For recessed applications, please contact your regional sales representative .

The Exit Sign in a Self-Powered configuration shall stay illuminated during emergency operation for at least 60 minutes upon AC failure.

The Exit Sign shall be CSA 860 and CSA22.2 No. 141 approved.

The equipment shall be **Ready-Lite®** Model: \_\_\_\_\_ .

## FEATURES


- Universal back box designed for surface or recessed mounting on ceilings or walls
- Modular retainer clips allow "snap-in" installation of face panel after installation of back box
- Acrylic panels with precision-etched lettering legend
- LED strip design allows for rotation for either ceiling or wall mounting
- Long-life, energy-efficient **ALINGAP** technology LED light source reduces maintenance and energy costs
- Energy efficient – consumes less than 5W in AC or DC mode
- Meets or exceeds C860 requirements
- Meets or exceeds CSA22.2 No.141-15

## POWER CONSUMPTION

MODEL	AC SPECS		DC SPECS	
AC/DC red	120 to 347VAC	less than 4.5W	6 to 36VDC	less than 2.5W
Self-Powered red	120 to 347VAC	less than 5W	nickel-cadmium battery	min. 60 minutes

## DIMENSIONS

Dimensions are approximate and subject to change.

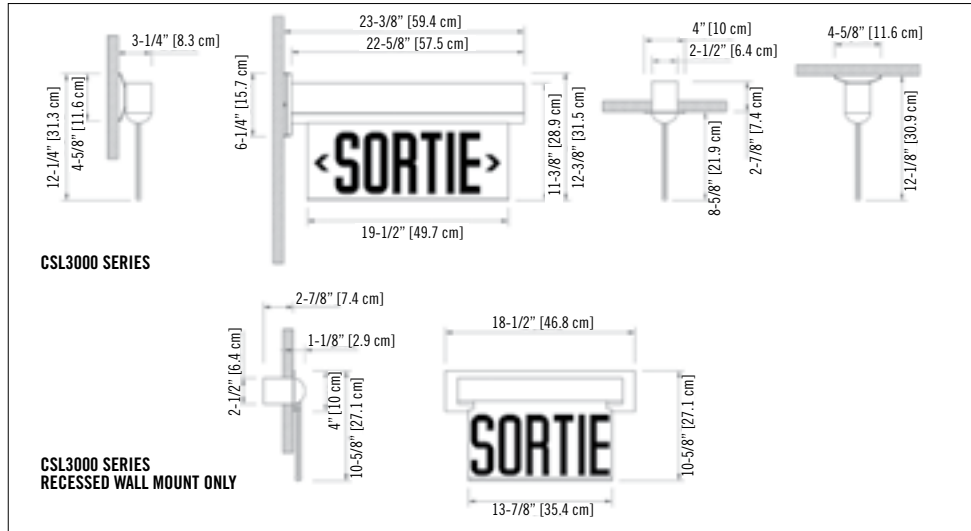

## ORDERING INFORMATION

SERIES	HOUSING COLOUR	PANEL COLOURS	CHEVRONS	VOLTAGE
<b>CSL3100</b> = single face <b>CSL3100R</b> = recessed single face wall mount, no chevrons <b>CSL3200</b> = double face	<b>Blank</b> = factory white <b>BA</b> = brushed aluminum <b>BK</b> = black	<b>-RC</b> = red/clear* <b>-RM</b> = red/mirror <b>-RW</b> = red/white	<b>NA</b> = no chevrons <b>AL</b> = chevron left <b>AR</b> = chevron right <b>DA</b> = double chevron <b>ALR</b> = one chevron each side, double face	<b>-DC</b> = 120 to 347VAC, 6 to 36VDC <b>-SP</b> = Self-Powered, 120 to 347VAC
		*Single face only.		

EXAMPLE: CSL3100-RCNADC