



ESCAPE™ C29 SERIES

Thermoplastic



Type: _____
 Project/Location: _____
 Contractor: _____
 Prepared By: _____
 Date: _____
 Model No.: _____

TYPICAL SPECIFICATIONS

The Contractor will install the **Ready-Lite® Escape™ C29 Series** battery unit. The emergency lighting system shall consist of fully automatic equipment with two MR16 glare-free halogen heads. Each unit shall contain a fully automatic, solid state charger with test switch and AC on pilot lights. The unit shall contain a sealed transfer circuit and low voltage disconnect circuit. The battery shall be 6V with a capacity of 29W for 30 minutes.

The unit shall be CSA C22.2 no 141-15.

The unit shall be **Ready-Lite®** model: _____ .

WIRE GUARDS

460.0100-RL	wall mount or ceiling mount
-------------	-----------------------------

REPLACEMENT LAMPS


ORDERING CODE	LAMP TYPE	VOLTAGE/ WATTAGE
580.0072-RL	MR16	6V-5.4W
580.0079-RL	MR16	6V-10W

FEATURES

- Injection-molded thermoplastic housing
- Two adjustable glare-free light heads
- Test switch and charge rate indicators
- Emergency mode: min. 90 minutes
- Universal 120/347 VAC input
- CSA C22.2 No. 141-15 certified
- Innovative snap together design allows for fast installation

DIMENSIONS

Dimensions are approximate and subject to change.

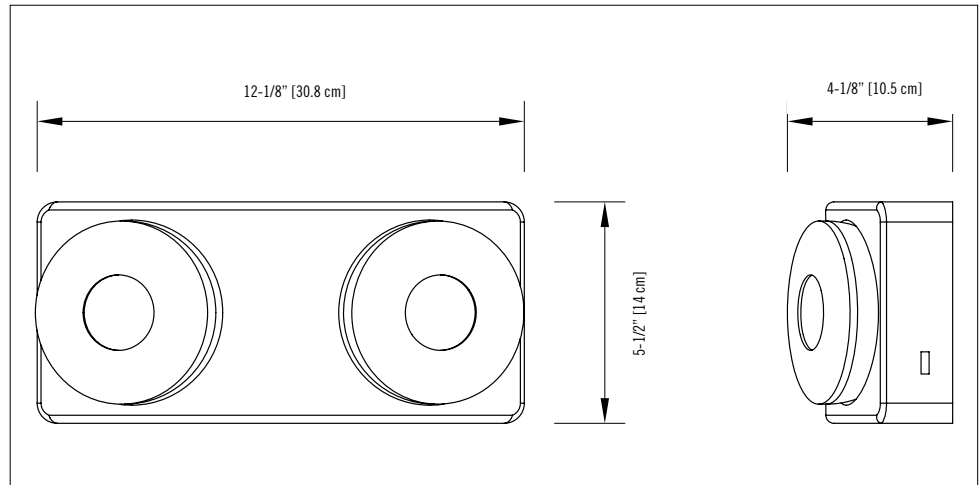

POWER CONSUMPTION AND UNIT RATING

MODEL	AC SPECS	DC SPECS
C29	120/347VAC 0.06/0.03 A less than 6W	6V-10.8W min. 90 minutes
C29/10	120/347VAC 0.06/0.03 A less than 6W	6V-20W min. 30 minutes

ORDERING INFORMATION

SERIES	CAPACITY	AC VOLTAGE	# OF LAMPS AND TYPE
C	29= 6V-29W	Blank= 120/347VAC	Blank= 2X MR16 halogen, 6V-5.4W (standard) /10= 2X MR16 halogen, 6V-10W

EXAMPLE: C29