

Type: \_\_\_\_\_  
 Project/Location: \_\_\_\_\_  
 Contractor: \_\_\_\_\_  
 Prepared By: \_\_\_\_\_  
 Date: \_\_\_\_\_  
 Model No.: \_\_\_\_\_



## TYPICAL SPECIFICATIONS

Base and remote head are injection-molded thermoplastic, shockproof and flame retardant. Shall be supplied factory white or black. The setting point shall provide visual indication of the light distribution. The fixture shall be supplied with a canopy to be installed on any standard octagonal box. The housing shall be designed to allow lamp replacement when required.

The remote unit shall be the **Ready-Lite®** model: \_\_\_\_\_

## WIRE GUARDS


460.0035-RL	wall mount single remote
460.0082-RL	wall mount double remote
460.0078-RL	wall mount triple remote

## REPLACEMENT LAMPS

MODEL	LAMP TYPE	VOLTAGE/WATTAGE
570.0016-RL	mini tungsten, wedge base	6V-9W
570.0025-RL	mini tungsten, wedge base	12V-9W
580.0023-RL	mini halogen, bi-pin	24V-20W

## DIMENSIONS

Dimensions are approximate and subject to change.

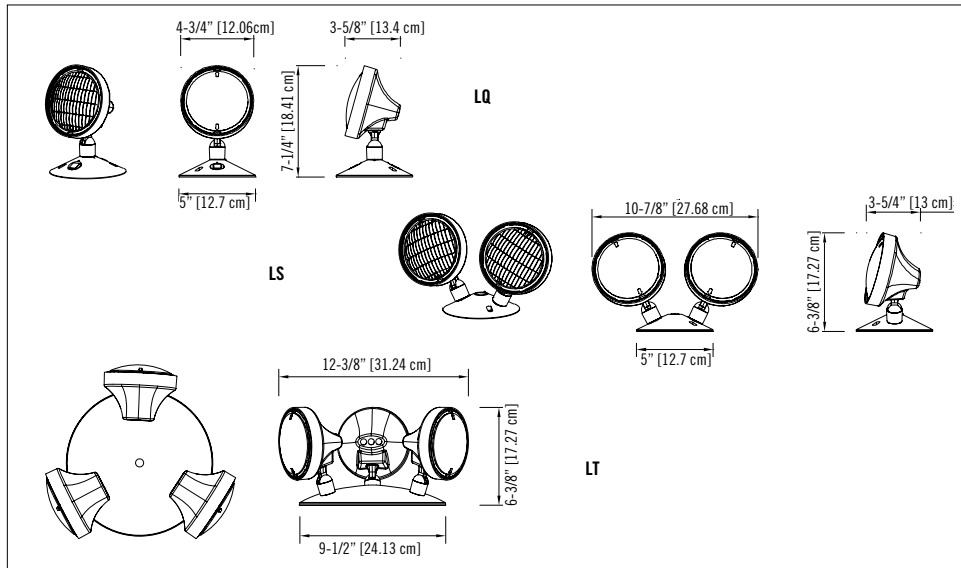

## LT/LQ/LS SERIES

Surface Mounted, Remote Fixture

## FEATURES

- PAR 36, surface-mounted, large remote fixtures
- Single, double or triple head
- Positive aim swivel
- CSA certified to C22.2 No.141-15

## ORDERING INFORMATION

SERIES	# OF HEADS	VOLTAGE/WATTAGE/LAMP TYPE	COLOUR	OPTION
<b>LT</b> = tungsten, PAR 36 <b>LQ</b> = halogen, PAR 36 <b>LS</b> = tungsten, sealed beam <b>LH</b> = halogen, sealed beam	1= single 2= double 3= triple	<b>-6/9</b> = tungsten, 6V - 9W, wedge base <b>-6/</b> = tungsten, 6V - 18 or 25W, D.C.B. <b>-12/</b> = tungsten, 12V - 9 or 18W, wedge base <b>-24/</b> = tungsten, 24V - 9 or 18W, wedge base <b>-24/25</b> = tungsten, 24V - 25W, D.C.B. <b>-6/</b> = halogen, 6V - 8 or 20W, bi-pin <b>-12/</b> = halogen, 12V - 8, 12, 20 or 55W, bi-pin <b>-24/</b> = halogen, 24V - 20 or 70W, bi-pin <b>-6/</b> = tungsten, 6V - 8, 12, 18 or 25W, sealed beam <b>-12/</b> = tungsten, 12V-12, 18 or 25W, sealed beam <b>-6/</b> = halogen, 6V - 8, 12 or 20W, sealed beam <b>-12/</b> = halogen, 12V - 8, 12 or 37W, sealed beam <b>-32/</b> = tungsten, 32V - 18 or 25W, D.C.B. <b>-120W</b> = tungsten, 120V - 10 or 15W, D.C.B.	<b>Blank</b> = factory white (PVC) <b>BK</b> = black (PVC) <b>CH</b> = chrome (metal) <b>M</b> = factory white (metal)	<b>TC</b> = teflon coated lens
		Lamp 50W and above to use metal trim only. NOTE : " _ " insert wattage required.		

EXAMPLE: LT1-6/9