



① one piece nylon self-insulated
Installing tool – WT2000,
WT2130A (RC & RP)



② two piece nylon insulator



③ Installing tool – WT161M
one piece non-insulated
Installing tool – WT161M

Sta-Kon® wire joints come in one-piece nylon, self-insulated and non-insulated, and a two-piece nylon insulator. Tool applied.

Crimp on Wire Joints – Tool Applied

Cat. No.	Pkg. Qty.	Wire Range		Dimensions		Wt./lb. Per 1000
		Min.	Max.	A	B	
① RB44	100	2#18	2#16	.31	.78	
RB4TB	1000			–	–	2
RC55	50	4#18	2#12	.43	.95	3
RC6	500			–	–	3
RP12	100	3#14	4#12	.53	1.00	
RP7	500			–	–	
② PT66M	100	2#18	3#12 combination	–	–	4
PT6M	100	–	Insulator only	.50	.93	2
PT60M	100	2#14	3#12 Connector only	.31	.37	2
③ PT70	200	2#14	3#12	.29	.34	2
PT70M	200	3#18	4#12	.31	.37	2
PT80	100	2#16	4#10	.35	.62	6

U.L. Listed E9809

Items on this page sold in multiples of unit packages only.

Installation Procedure for “PT” Connectors






Twist wires, insert through serrated barrel of wire joint. (PT60M, PT70, PT70M, PT80).



Crimp and trim off excess wire with WT161M hand tool.

Screw PT6 insulator firmly onto PT160M barrel.

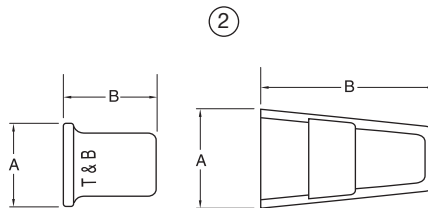

Cat. No.	Allowable Wire Combinations								
	#22	#20	#18	#16	#14	#12	#10		
RB4/RB44	2-3							2	
	1-2		2						1
	3							1	
	3							1	
	3	1						1	
	2	3						2	
	1-2	2						3	
	2				1				3-6
	3	1						1 2-3	
	1	2						2 1-2	
RC6/RC55	1-4							1	
	1-3							1	
	1-2							1	
	2							2	
	3-5							1	
	2-4							1	
	3							2	
	1-4							2	
	1-3							2	
	1-3							3	
RP7/RP12	1							3	
	2-5							1	
	4-6							1	
	2-3							2	
	1-2							1	
	3							1-2	
	4							1-2	
	1							2	
	2							2	
	3							2	