

Type: _____
 Project/Location: _____
 Contractor: _____
 Prepared By: _____
 Date: _____
 Model No.: _____




RCSB SERIES

Miniature LED Battery Unit

DIMENSIONS

Dimensions are approximate and subject to change.

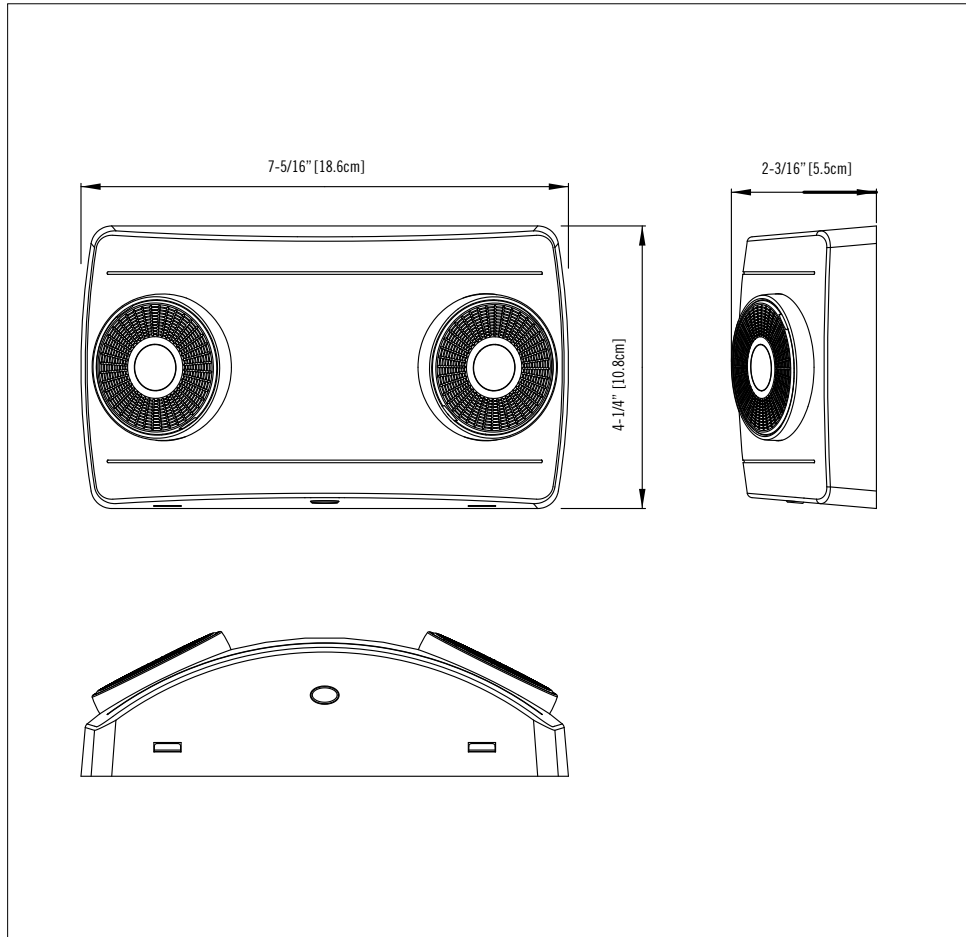

FEATURES

- Fully adjustable LED glare-free lens
- 3.6V 1W long life LED light source, 6000K
- Remote capacity for one dedicated remote head (RCSR only).
- Dual voltage input capability 120/277VAC
- Automatic, temperature compensated, pulse type charger
- Low voltage disconnect prevents over discharge of battery
- Automatic brownout protection
- Sealed maintenance-free 3.6V Nickel-Metal Hydride battery offering 90 minutes of emergency lighting
- Battery lock-out prevents discharge during installation
- Red LED charger monitor
- Momentary test switch allows for quick operational check
- Injection-molded thermoplastic ABS housing
- Rear keyhole slots and universal knock-outs to mount to any standard 4" junction box
- Fast and easy installation with snap-together design
- Ceiling or wall mount installation
- Meets CSA C22.2 no.141-15-10
- Comes standard with one (1) year warranty

POWER CONSUMPTION AND UNIT RATING

MODEL	AC SPECS			DC SPECS	
	VOLTS	CURRENT	POWER	BATTERY	EMERGENCY TIME
RCSB-6	120/277VAC	0.06/0.07 A	0.4/0.6 W	NiMH battery	min. 90 minutes

*NOTE: The RCS Family cannot be combined with other Ready-Lite® Products on the same emergency A.C. circuit.

RSC FAMILY		
RSC Exit P. 54	RSC Combo P. 55	Remote P. 148

ORDERING INFORMATION

SERIES	CAPACITY	VOLTAGE	LAMP
RCSB	-6= 6W-3.6V	Blank= 120/277VAC	Blank= 2X 1W LED

EXAMPLE: RCSB-6