

Type: _____
 Project/Location: _____
 Contractor: _____
 Prepared By: _____
 Date: _____
 Model No.: _____



TYPICAL SPECIFICATIONS

Supply and install the **Ready-Lite® CXL3000BIL & CSL3000BIL Series** LED Edge-Lit sign. The equipment shall operate with universal two-wire AC input voltage from 120VAC to 347VAC at less than 8.6W and universal 2-wires DC input voltage from 6VDC to 36VDC at less than 4.5W for single and double face signs. The housing assembly shall be fabricated of aluminum and consist of a universal aluminum back box. The back box shall be provided with conduit knockouts on top and back. The trim plate shall have a round shape and shall attach to the housing assembly with two (2) torsion spring retainers thereby eliminating all visible hardware. The LED light strip shall be contained within the trim plate. Red LED technology shall be **ALINGAP**. The polished acrylic face panel shall have precision-etched 6" high, 3/4" stroke red letters with a white, clear or mirror background, with the words EXIT and SORTIE side by side. The Exit Sign in a Self-Powered configuration shall stay illuminated during emergency operation for at least 30 minutes upon AC failure.

The Exit Sign shall be CSA-C860 and CSA22.2 No. 141 approved.


The equipment shall be **Ready-Lite®** Model: _____.

POWER CONSUMPTION

MODEL	AC SPECS		DC SPECS	
AC/DC red	120 to 347VAC	less than 8.6W	6 to 36VDC	less than 4.5W
Self-Powered red	120 to 347VAC	less than 8.6W	nickel-cadmium battery	min. 30 minutes

DIMENSIONS

Dimensions are approximate and subject to change.

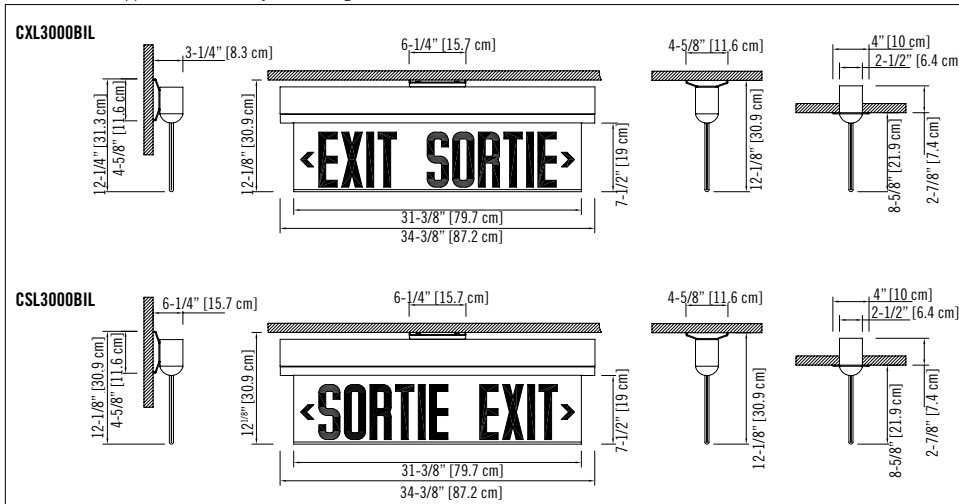

ORDERING INFORMATION

SERIES	FACES	HOUSING COLOUR	PANEL COLOURS	CHEVRONS	VOLTAGE	APPROVAL *	OPTIONS
CXL= exit sortie CSL= sortie exit	3100= single face 3200= double face	Blank= factory white BA= brushed aluminum BK= black	RC= red/clear* RM= red/mirror RW= red/white *Single face only	NA= no chevrons AL= chevron left AR= chevron right DA= double chevrons ALR= one chevron each side, double face	DC= 120 to 347VAC, 6 to 36VDC SP= Self-Powered, 120 to 347VAC	-BIL *Required field	R= recessed mount* *Ceiling mount only.

EXAMPLE: CXL3100RCNADCBIL



CXL3000BIL & CSL3000BIL SERIES

Bilingual Edge-Lit Sign

FEATURES

- Universal back box designed for surface or recessed mounting on ceilings or walls
- Modular retainer clips allow "snap-in" installation of face panel after installation of back box
- LED Edge-Lit, acrylic face panels with precision-etched lettering
- LED strip design allows for rotation for either ceiling or wall mounting
- Long life, energy-efficient **ALINGAP** technology LED light source reduces maintenance and energy costs
- Energy efficient – consumes less than 8.6W in AC or DC mode
- CSA certified, meets or exceeds CSA 22.2 No. 141 requirements