



DESIGNER CX4000 SERIES

Extruded Aluminium Sign



Type: _____
 Project/Location: _____
 Contractor: _____
 Prepared By: _____
 Date: _____
 Model No.: _____

TYPICAL SPECIFICATIONS

Supply and install the **Ready-Lite® CX4000 Series** LED Exit Sign. The equipment shall operate with universal AC input voltage of 120/277/347VAC at less than 1.5W and universal two-wire DC input voltage from 6VDC to 24VDC at less than 1.5W for single and double face signs. The Exit Sign shall consist of a two-piece white extruded aluminum combined body/faceplate with a maximum depth of 1-1/4". The exit shall also include extruded aluminum end caps with white gaskets in order to provide protection to the internal components and eliminate any possible light leaks. The exit fixture shall be either single or double-faced as shown on the drawings. The faceplate shall be of a stencil design and will incorporate 6" high letters with a 3/4" stroke. The canopy shall fasten to the exit body for ease of installation in either ceiling or end mount. The fixture shall contain a light source, which shall be LED with a long life and shall consist of separate AC and DC LED sources in the case of AC/DC-remote equipment. Red LED technology shall be **ALINGAP**.

The Exit Sign in a Self-Powered configuration shall be equipped with a Nickel-Cadmium battery and shall stay illuminated during emergency operation for at least two hours upon AC failure.

The Exit Sign shall be CSA-C860 approved and meets CSA 22.2 No. 141.

The equipment shall be **Ready-Lite®** Model: _____.

FEATURES


- Thin profile, 2-piece extruded aluminum housing
- Pre-specified mounting
- Universal, field-selectable chevrons (knockout)
- Energy efficient – consumes less than 3.5W in AC or DC mode
- Long life **ALINGAP** technology energy-efficient LED light source
- CSA certified, meets or exceeds CSA 22.2, No. 141 and C860 requirements
- Normal AC and emergency DC operation – 120, 277 or 347V AC input; 6 to 24V DC input
- Available in single or double face
- Indirect refractive technology provides bright, even illumination

WIRE GUARDS

460.0079-RL	wall mount
460.0027-RL	end mount
460.0028-RL	ceiling mount

DIMENSIONS

Dimensions are approximate and subject to change.

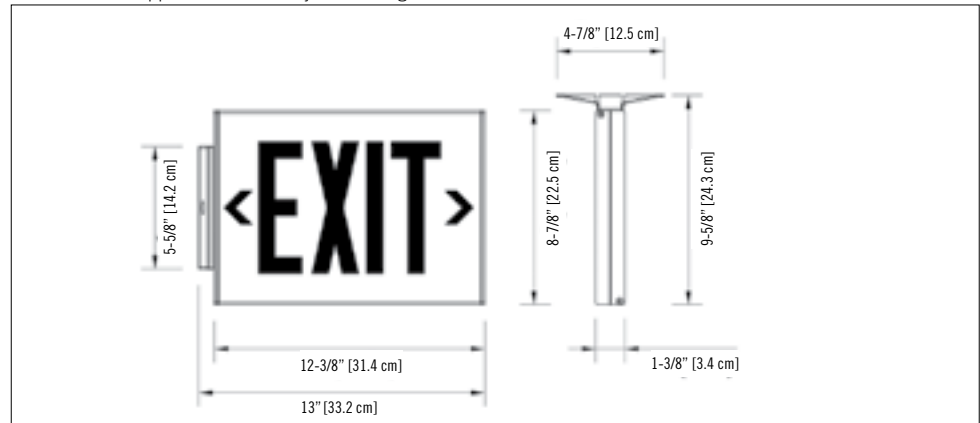

POWER CONSUMPTION

MODEL	AC SPECS		DC SPECS	
AC/DC standard	120/277/347VAC	less than 1.5W	6 to 48VDC	less than 1.5W
AC/ special DC	120/277/347VAC	less than 1.5W	36 or 48 or 120VDC	less than 3W
120VAC/DC two wires	120VAC	less than 3W	120VDC	less than 3W
Self-Powered	120/347VAC	less than 3.5W	nickel-cadmium battery	min. 2 hours

ORDERING INFORMATION

SERIES	FACES/MOUNTING	COLOUR	VOLTAGE	OPTIONS
CX4= LED exit	000= single face, wall mount 100= single face, ceiling mount 100E= single face, end mount 200= double face, ceiling mount 200E= double face, end mount	BA= brushed aluminum BK= black TA= textured aluminum WH= polar white	-UL= 120/277/347VAC, 6 to 24VDC -LU36= 120/277/347VAC-36VDC, 4 wires -LU48= 120/277/347VAC-48VDC, 4 wires -LU120= 120/277/347VAC, 120VDC, 4 wires -ISP= Self-Powered, 120/347VAC -ISP2= Self-Powered, 120/277VAC -L120-2W= 120VAC-120VDC -2 wires	TP= tamper-proof screws* *990.0119-RL= Tamper-proof bit (sold separately)

EXAMPLE: CX4000WH-ULTP