



## RD SERIES

### Die-Cast Pictogram Sign



Type: \_\_\_\_\_  
 Project/Location: \_\_\_\_\_  
 Contractor: \_\_\_\_\_  
 Prepared By: \_\_\_\_\_  
 Date: \_\_\_\_\_  
 Model No.: \_\_\_\_\_

### TYPICAL SPECIFICATIONS

Stylish and built of Die-Cast aluminum, the new **Ready-Lite® RD Series** offers superior workmanship, versatile mounting capabilities and economical, long-lasting LED performance.

Supply and install the **RD Series** Pictogram Sign. The faceplate(s) and the back plate shall snap together and be made of Die-Cast aluminum. No screws are necessary to hold the faceplate(s) or the back plate to the housing. The light source shall be light emitting diodes (LED). The LED strip shall provide illumination in normal and emergency operation and shall be mounted inside the pictogram sign on a plastic frame/reflector.

The equipment in a Self-Powered configuration shall use a sealed Nickel-Cadmium battery of 2.4V nominal voltage. The equipment shall recharge the battery in 24 hours and stay illuminated at least for a minimum 120 minutes upon AC failure. The equipment shall operate with a dual-voltage input of 120/277VAC 60Hz or 120/347VAC 60Hz with less than 3.5W of consumption.


When specified, the Self-Powered model equipped with advanced diagnostic shall self-test by simulating a power failure for one minute every 30 days, 30 minutes every 6 months and 120 minutes annually. A diagnostic circuit shall continuously monitor the performance of the battery, charger module and LED strip. Upon failure detection the system shall display the error on the AC pilot lamp, which will change color and will flash with a specific code.

The pictogram Exit Sign shall be CSA 22.2 No.141-15 certified.

The pictogram Sign shall be **Ready-Lite®** Model: \_\_\_\_\_.

### DIMENSIONS

Dimensions are approximate and subject to change.

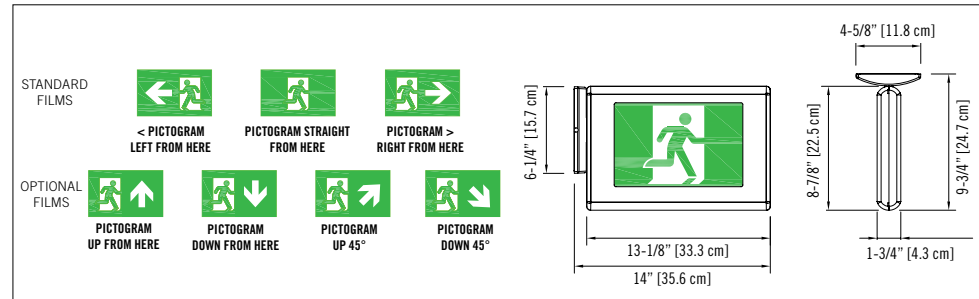

### WIRE GUARDS

460.0079-RL	wall mount
460.0027-RL	end mount
460.0028-RL	ceiling mount

### POWER CONSUMPTION

MODEL	AC SPECS		DC SPECS	
AC only	120/277VAC or 120/347VAC	less than 2.5W	-	-
AC/DC standard	120/277VAC or 120/347VAC	less than 2.5W	6 to 48VDC	less than 2W
Self-Powered	120/277VAC or 120/347VAC	less than 3.5W	Nickel-Cadmium battery	minimum 120 minutes
Self-Powered with diagnostic	120/277VAC or 120/347VAC	less than 3.5W	Nickel-Cadmium battery	minimum 120 minutes

### ORDERING INFORMATION

SERIES / ENCLOSURE	FACES / MOUNTING	ARROW CONFIGURATION	HOUSING/ FACEPLATE COLOR	CIRCUIT TYPE	VOLTAGE	OPTIONS
<b>RD</b> = Die-Cast Pictogram	1= Single face, universal mount 2= Double face, universal mount 3= Universal face, universal mount*	<b>Blank</b> = Standard film* <b>UP</b> = Arrow Up <b>DN</b> = Arrow Down <b>U4</b> = Arrow Up 45° <b>D4</b> = Arrow Down 45°	<b>WW</b> = Factory White/ Factory White <b>BB</b> = Black/black <b>BA</b> = Black/brushed aluminum <b>WA</b> = Factory White/ brushed aluminum	<b>AC</b> = AC only <b>UD</b> = AC & 6 to 48VDC <b>SP</b> = Self-Powered <b>SPD</b> = Self-Powered diagnostic audible <b>SPDN</b> = Self-Powered diagnostic non-audible <b>NEX</b> = Nexus® wired system interface <b>NEXRF</b> = Nexus® Wireless system interface	2= 120/277VAC 3= 120/347VAC	<b>TP</b> = Tamper-proof screws* <b>VR</b> = Vandal resistant shield and tamper-proof screws*
	* Only available with standard film. Not available with Nexus®	* See features for standard film details				* Only available with Single or Double Face.

EXAMPLE: RD1BBSPDN3