



RP-BLD SERIES

"Built-in" micro LED lamps remote fixture

new product



Type:	_____
Project/Location:	_____
Contractor:	_____
Prepared By:	_____
Date:	_____
Model No.:	_____

TYPICAL SPECIFICATIONS


Lamp head and stem shall be injection molded, impact resistant, flame retardant thermoplastic.
 Fixture shall be supplied with a canopy for installation on any four inch octagon box.
 The remote unit shall be the **Ready-Lite®** model: _____

WIRE GUARDS

460.0029-RL	wall mount or ceiling mount
-------------	-----------------------------

DIMENSIONS

Dimensions are approximate and subject to change.

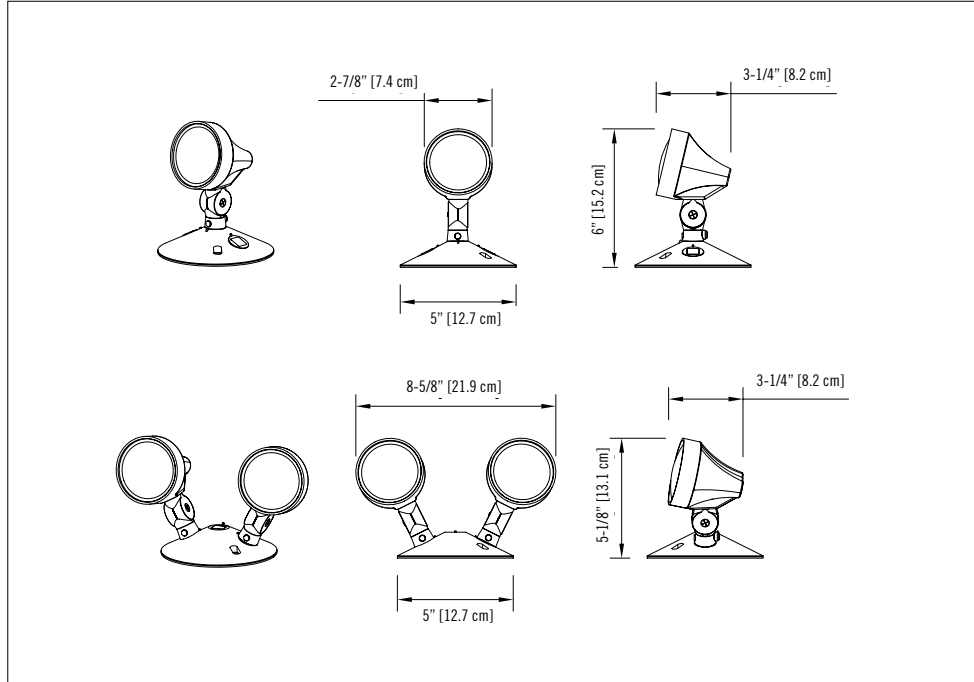

FEATURES

- 6 to 12V, 3W LED each head
 - Fire-retardant thermoplastic
 - 300° rotation
 - CSA certified to C22.2 No.141-15
- See warranty details at:**
www.tnb.ca/en/brands/ready-lite

ORDERING INFORMATION

SERIES	NUMBER OF HEADS	LAMP VOLTAGE
RP= Plastic built-in LED	1= Single head 2= Double heads	BLD= Plastic built-in LED, 6V / 12V, 3W each

EXAMPLE: RP1BLD