

new product



CM-SC SERIES


Steel pictogram combination unit

FEATURES

- Steel housing with thermoplastic fully adjustable 2W LED heads
 - Universal ceiling, side or wall mount
 - Universal single and double face
 - 3 pictogram panels included: 1 with no arrow and 2 with arrows
 - Can power CM-R1 and CM-R2 remote fixtures only
 - 120VAC-347VAC, 50/60Hz input
 - Lead-acid battery provides minimum 120 minutes of emergency lighting
 - Red LED charger monitor
 - CSA C22.2 No.141-10 listed
- See warranty details at: www.tnb.ca/en/brands/ready-lite

DIMENSIONS

Dimensions are approximate and subject to change.

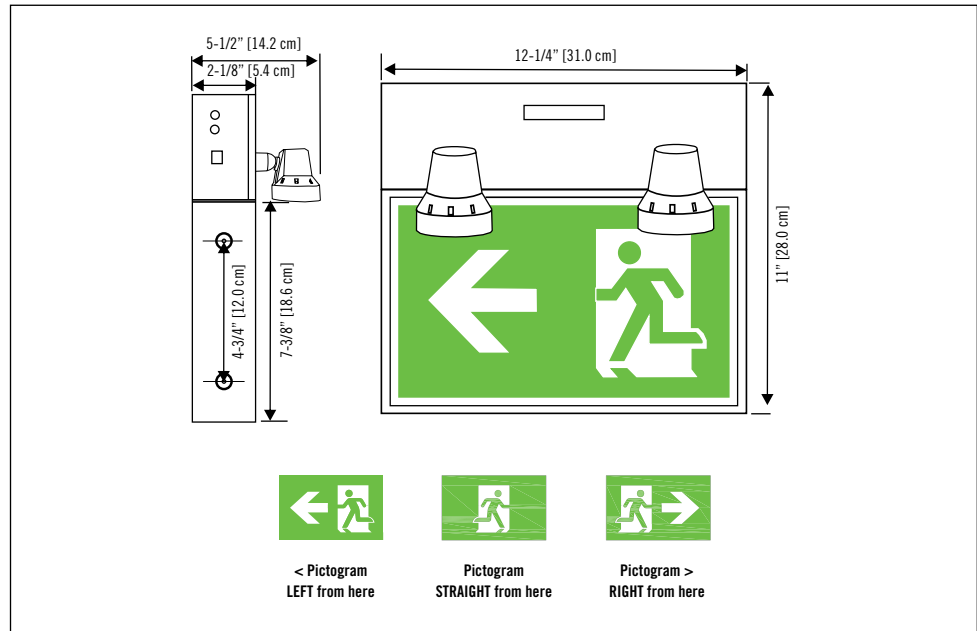

POWER CONSUMPTION AND UNIT RATING

MODEL	AC SPECS			
		WATTAGE	CURRENT	EFFICIENCY
CM-SC-RL	120V, 50/60Hz	3.2W	0.03A	0.97P
	277V, 50/60Hz	6.5W	0.025A	0.92PF
	347V, 50/60Hz	3.6W	0.01A	0.92P

ORDERING INFORMATION

SERIES	VOLTAGE
CM-SC-RL	Blank= 120VAC-347VAC

EXAMPLE: CM-SC-RL

