


DIMENSIONS

Dimensions are approximate and subject to change.

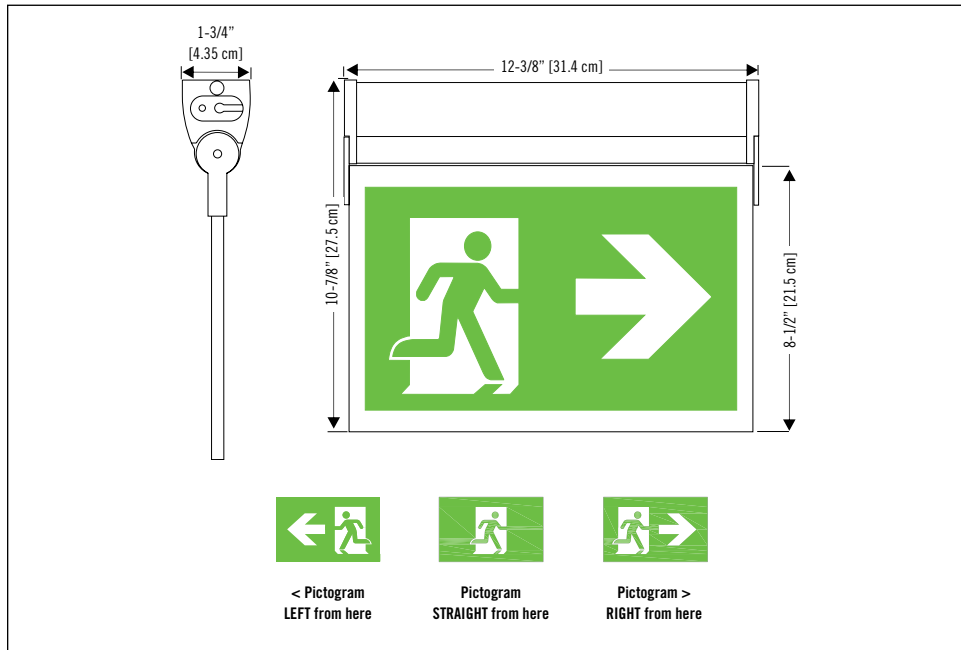

CM-EDGE SERIES

Aluminum edge-lit pictogram sign

FEATURES

- Aluminum frame and polycarbonate panels illuminated by high efficiency LEDs
 - Universal side, wall and ceiling mount
 - Universal single and double face
 - 3 pictogram panels included: 1 with no arrow and 2 with arrows
 - 120-347VAC 50/60Hz Input
 - Nickel-cadmium battery offering 120 minutes of emergency lighting
 - Red LED charger monitor and momentary test switch (self-powered model)
 - CSA C22.2 No.141-15 certified
- See warranty details at: www.tnb.ca/en/brands/ready-lite

POWER CONSUMPTION AND UNIT RATING

MODEL	AC SPECS			
		WATTAGE (AC/SP)	CURRENT (AC/SP)	EFFICIENCY (AC/SP)
CM-EDGE-RL	120V, 50/60Hz	2W/3W	0.01A/0.24A	0.96PF/0.98PF
	277V, 50/60Hz	2W/3W	0.007/0.014A	0.87PF/0.88PF
	347V, 50/60Hz	3W/4W	0.01A/0.017A	0.91PF/0.92PF

ORDERING INFORMATION

SERIES	VOLTAGE	BRAND
CM-EDGE	-AC= 120VAC-347VAC -SP= 120VAC-347VAC, self-powered (120 minutes)	-RL= Ready-Lite®

EXAMPLE: CM-EDGE-AC-RL

