



CX5 SERIES

Triangular Extruded Aluminum Exit Sign



Type: _____
 Project/Location: _____
 Contractor: _____
 Prepared By: _____
 Date: _____
 Model No.: _____

TYPICAL SPECIFICATIONS

Supply and install the **Ready-Lite® CX5 Series** of three-face LED Exit Signs. The equipment shall operate with universal AC input voltage of 120, 277 or 347VAC at less than 2W and universal two-wire DC input voltage from 6VDC to 24VDC at less than 3.5W. The housing shall be constructed of rugged extruded aluminum painted with a factory white finish and shall have three face plates oriented symmetrically at 120 degrees in the horizontal plan.

The faceplates shall be constructed of extruded aluminum and come standard with knockout chevrons. The light source shall be red light emitting diodes (LED) of long-life technology **ALINGAP**. An LED-sensitive diffuser shall be mounted behind the legend to provide the 6" high by 3/4" stroke letters with even illumination. Each legend shall be illuminated by one dedicated LED lamp (strip). The LED lamps shall be oriented two downwards and one upwards and shall provide illumination in normal and emergency operation. Eventual failure of one LED lamp shall not affect the well-functioning of the other two lamps. The 3 sided exit sign shall come standard with a pendant kit with a 3/8" diameter pipe for ceiling-mount installation.

The Exit Sign shall be C860 approved and meets CSA 22.2 No.141


The equipment shall be **Ready-Lite®** Model: _____.

FEATURES

- Rugged extruded aluminum housing
- Extruded aluminum faceplates
- White finish standard
- Standard field-selectable knockout chevrons
- Long life, energy-efficient LED light source
- **ALINGAP** technology LED
- CSA certified, meets or exceeds CSA 22.2 No. 141 requirements

DIMENSIONS

Dimensions are approximate and subject to change.

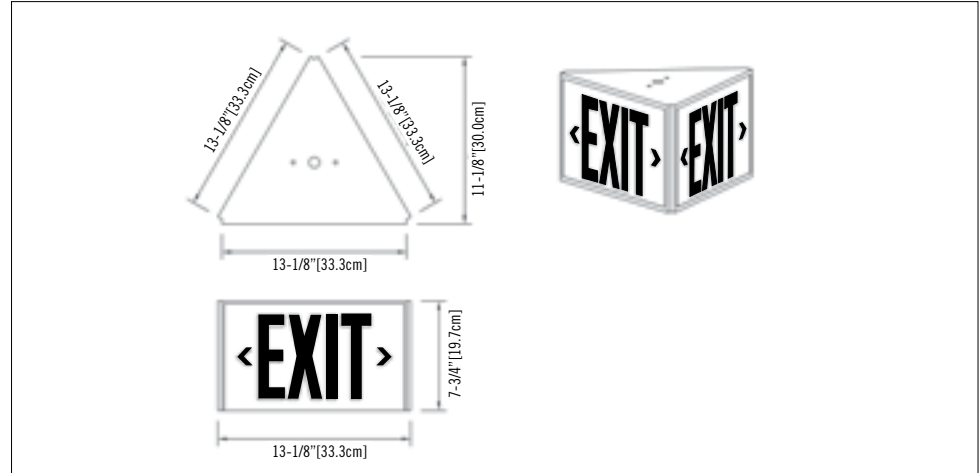

POWER CONSUMPTION AND UNIT RATING

MODEL	AC SPECS		DC SPECS	
AC / DC - standard	120/277/347VAC	less than 2W	6 to 24VDC	less than 3.5W

ORDERING INFORMATION

SERIES	FACES/ MOUNTING	COLOUR	VOLTAGE	OPTIONS
CX5= exit extruded aluminum	1002S= 2 sided face (wall mounting only) 1003S= 3 sided face (pendant mounting only)	WH= factory white	UL= 120/277/347VAC, 6 to 24VDC	TP= tamper-proof screws* *990.0119-RL= Tamper-proof bit (sold separately)

EXAMPLE: CX51002SWHUL