

Type: \_\_\_\_\_  
 Project/Location: \_\_\_\_\_  
 Contractor: \_\_\_\_\_  
 Prepared By: \_\_\_\_\_  
 Date: \_\_\_\_\_  
 Model No.: \_\_\_\_\_



## TYPICAL SPECIFICATIONS

Supply and install the **Ready-Lite® CS2000 Series** LED “SORTIE” Exit Signs. The equipment shall operate with universal two-wire AC input voltage from 120VAC to 347VAC at less than 3W and universal two-wire DC input voltage from 6VDC to 48VDC at less than 1.5W for single or double face signs. The faceplate(s) and the back plate shall snap together and shall be made of Die-Cast aluminum. The Exit Sign shall have a maximum depth of 1-3/4”.

The light source shall be light emitting diodes (LEDs). The LED lamps shall provide illumination in normal and emergency operation and shall be mounted inside the exit. Red LED technology shall be **ALINGAP**. A LED-sensitive diffuser shall be mounted behind the legend to provide the 6” high by 3/4” stroke letters with even illumination.

The Self-Powered model shall stay illuminated during emergency operation for at least 60 minutes upon AC failure. The Self-Powered model shall include self-testing and self-diagnostic functions: the equipment shall automatically test itself for 5 minutes every 30 days, 30 minutes every 60 days and 90 minutes annually. A “Service” pilot light shall be located near the test switch and flash in the case of a fault detection. A two-LED diagnostic display shall be located inside the equipment and shall be capable of identifying the source of failure (battery, charger circuitry, or LED lamp failure).

The Exit Sign shall be CSA-C860 approved and meets CSA 22.2 No.141


The equipment shall be **Ready-Lite®** Model: \_\_\_\_\_.

## WIRE GUARDS

460.0057-RL	wall mount
460.0048-RL	end mount
460.0058-RL	ceiling mount

## DIMENSIONS

Dimensions are approximate and subject to change.

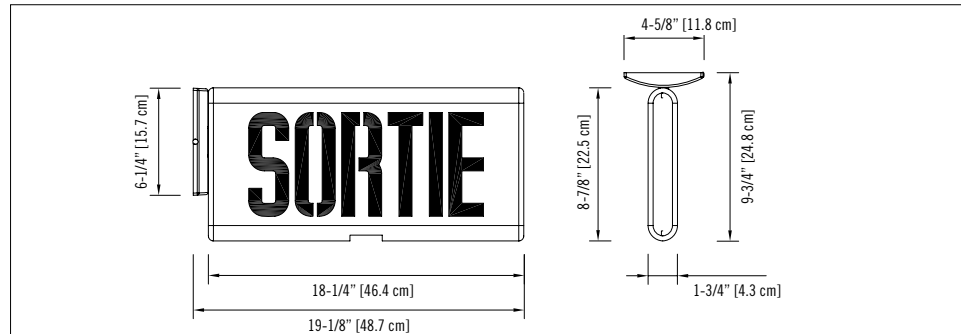

## POWER CONSUMPTION

MODEL	AC SPECS		DC SPECS	
AC/DC	120/347VAC	less than 2W	6 to 48VDC	less than 1.5W
Self-Powered	120/347VAC	less than 3W	nickel-cadmium battery	min. 60 minutes

## ORDERING INFORMATION

SERIES	FACES	HOUSING/FACEPLATE COLOURS	VOLTAGE	OPTIONS
CS2= LED sortie	100U= single face, universal mount 200U= double face, universal mount	WH/WH= white/white BK/BK= black/black WH/BA= white/brushed aluminum BK/BA= black /brushed aluminum BA/BA= brushed aluminum/brushed aluminum CH/CH= chrome/chrome  Other colours available.	DC= 120VAC to 347VAC, 6VDC to 48VDC SPD= Self-Powered diagnostic Ni-Cd, 120/347VAC NEX= NEXUS® wired system interface*  *Not all options available with NEXUS® System. Please consult your sales representative	TP= tamper-proof screws* VRTP= polycarbonate shield with tamper-proof screws*  *990.0119-RL= Tamper-proof bit (sold separately)

EXAMPLE: CS2100UWH/WHDC

## FEATURES

- Durable, powder-coated Die-Cast construction
- Slim contoured body design
- Diagnostic/self-test feature comes standard on all Self-Powered units
- Universal mounting – wall, end or ceiling mounting
- Even illumination in both normal and emergency operation
- Long-life, energy-efficient **ALINGAP** technology LED light source reduces maintenance and energy costs
- Energy efficient – consumes less than 3W
- Maintenance-free, long-life sealed Nickel-Cadmium battery
- Normal AC and emergency DC operation – 120 to 347V universal AC input; 6 to 48V universal DC input
- NEXUS® compatible (for more information on NEXUS®, please consult your sales representative)
- CSA certified, meets or exceeds CSA 22.2 No. 141 requirements