


Type: _____
 Project/Location: _____
 Contractor: _____
 Prepared By: _____
 Date: _____
 Model No.: _____

new features

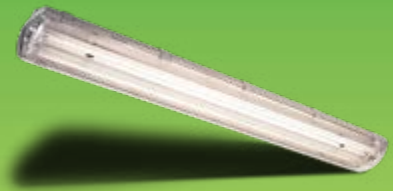

IPR SERIES

IP65 Linear Fluorescent Fixture

TYPICAL SPECIFICATIONS

Supply and install **Ready-Lite® IPR Series** fluorescent fixtures as specified. The luminaire shall operate from 120Vac to 277Vac or 347Vac and use high quality instant start or 3-step programmed rapid start high efficiency electronic ballasts. The body and lens shall be constructed of UV stabilized industrial grade vandal-resistant polycarbonate. A durable formed gasket shall be provided between the enclosure and the lens and shall be designed specifically for hostile environments. Ultra efficient white reflector for IPR8W and specular reflector for IPR5 and formed to maximize light output efficiency. All parts shall be corrosion resistant. A metal plate used to retain the ballast and reflector also serves to dissipate heat, therefore lengthening ballast life.

Lamps shall be as specified, either T8 or T5 HO linear fluorescent lamps, 32W or 54W. The lamps shall not be supplied with the luminaire. Models with an inverter from the **FPSI/FPSU Series** shall illuminate one or two lamps during emergency operation for at least 90 minutes upon AC failure. During power outage, dual voltage source (AC/DC) models with an inverter from the **RIB Series** shall illuminate one lamp while the DC voltage is present. The fixture shall be CSA approved and meet IP65 designation requirements.

The inverters of **RIB Series** shall be CSA approved.

The inverters of the **FEB Series** shall be CSA or cUL approved.

The fixture shall be **Ready-Lite®** model: _____.

WIRE GUARDS


460.0105-RL	wall mount or ceiling mount
-------------	-----------------------------

POWER CONSUMPTION

MODEL		AC SPECS	
IPR8W	120/277VAC	0.54/0.23 A	PF > 0.9
IPR8W3	347VAC	0.19 A	PF > 0.9
IPR5	120/277VAC	1.03/0.143 A	PF > 0.9
IPR53	347VAC	0.35 A	PF > 0.9

DIMENSIONS

Dimensions are approximate and subject to change.

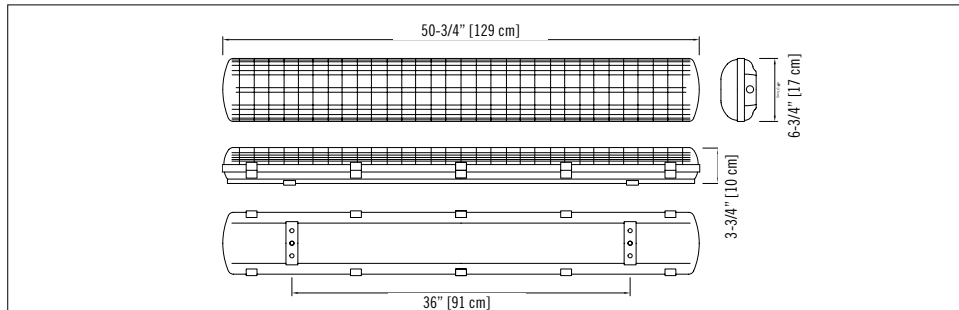

FEATURES

- IP65 rated
- Polycarbonate enclosure and lens, vandal resistant and UV stabilized
- Rust proof hardware
- Ceiling, surface or pendant mounting
- Low profile, less than 4" deep
- Ultra efficient specular reflector (T5) or White reflector (T8) with optimized shape
- 32W T8 or 54W T5HO
- 90 minutes of emergency operation when installed with our FPSI or FPSU inverters
- Emergency operation from external DC low voltage power source when installed with our 48 Series inverters
- Suitable for wet locations
- CSA certified to CSA-E60598-1: 02

ORDERING INFORMATION

SERIES	LAMP TYPE*	VOLTAGE	ACCESSORIES
IPR= 48" (122cm) linear fluorescent	8W= 2x lamps 32W T8 white reflector	Blank= AC only 120/277VAC	SELF-POWERED, ONE LAMP EMERGENCY
	5= 2x lamps 54W T5HO	3= AC only 347VAC DC= 120VAC/VDC	FPDL-32= inverter for IPR8W (complete code= IPR8WFPDL-32) FPDL/U= inverter for IPR5 (complete code= IPR5FPDL/U)
			SELF-POWERED, TWO LAMPS EMERGENCY
			FPDL-28= inverter for IPR8W (complete code= IPR8WFPDL-28)

*Lamps not included

EXAMPLE: IPR8W