

Type: _____
 Project/Location: _____
 Contractor: _____
 Prepared By: _____
 Date: _____
 Model No.: _____



TYPICAL SPECIFICATIONS

Supply and install **Ready-Lite® RL40M Series** remote emergency lighting. These remote fixtures will consist of either single or double lamp configurations as specified and include a UV resistant fire retardant polycarbonate back plate and a clear heavy-duty UV resistant polycarbonate light cover. The remote fixture shall be certified to CSA C22.2 No.141-15. The head(s) shall be fully adjustable and be equipped with high efficiency MR16 halogen or LED lamp(s) of _____ V, _____ W.

The remote unit shall be **Ready-Lite®** model: _____.

WIRE GUARDS

460.0029-RL	wall mount
-------------	------------

REPLACEMENT LAMPS: MR16 RL40MP

ORDERING CODE	LAMP TYPE	VOLTAGE
580.0074-RL	MR16 flood	6V-6W
580.0079-RL	MR16 flood	6V-10W
580.0080-RL	MR16 flood	12V-12W
580.0070-RL	MR16 flood	24V-12W
580.0097-RL	MR16, LED	6V-4W
580.0093-RL	MR16, LED	12V-4W
580.0104-RL	MR16, LED	12V-5W
580.0106-RL	MR16, LED	12V-6W
580.0098-RL	MR16, LED	24V-4W


For the complete list, please see the lamp chart on pages 166 to 168

REPLACEMENT LAMPS: MR16 RL40M

ORDERING CODE	LAMP TYPE	VOLTAGE
580.0068-RL	MR16 IR flood	12V-20W
580.0077-RL	MR16 flood	24V-20W
580.0100-RL	MR16, LED	24V-6W
580.0113-RL	MR16, LED	120V-4W

DIMENSIONS

Dimensions are approximate and subject to change.

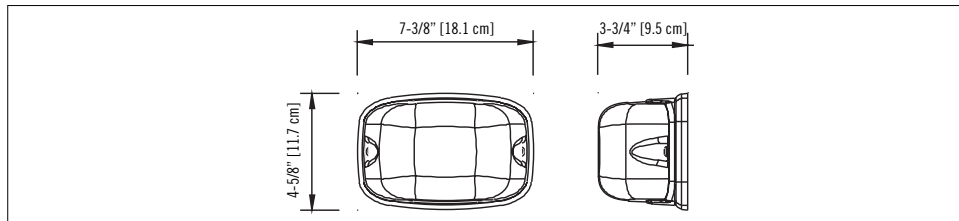

ORDERING INFORMATION: RL40MP

SERIES	NUMBER OF LAMPS	LAMP TYPE/VOLTAGE/WATTAGE	COLOUR	OPTIONS
RL40MP = polycarbonate back plate	1= one lamp 2= two lamps	- LD1 = MR16 LED, 6V-4W - LD7 = MR16 LED, 12V-4W - LD9 = MR16 LED, 12V-5W - LD10 = MR16 LED, 12V-6W - LD13 = MR16 LED, 24V-4W - 6/6 = MR16 halogen, 6V-6W - 6/10 = MR16 halogen, 6V-10W - 12/12 = MR16 halogen, 12V-12W - 24/12 = MR16 halogen, 24V-12W	Blank = factory white BK = black GY = grey Other colours available.	Blank = no options T = tamper-proof screws* * 690.0454-RL = tamper-proof bit (sold separately)

EXAMPLE: RL40MP1-6/6

ORDERING INFORMATION: RL40M

SERIES	NUMBER OF LAMPS	LAMP TYPE/VOLTAGE/WATTAGE	COLOUR	OPTIONS
RL40M = die-cast	1= one lamp 2= two lamps	- LD1 = MR16 LED, 6V-4W - LD7 = MR16 LED, 12V-4W - LD9 = MR16 LED, 12V-5W - LD10 = MR16 LED, 12V-6W - LD13 = MR16 LED, 24V-4W - LD14 = MR16 LED, 24V-6W - LD26 = MR16 LED, 120V-4W	- 6/6 = MR16 halogen, 6V-6W - 6/10 = MR16 halogen, 6V-10W - 12/12 = MR16 halogen, 12V-12W - 12/20H = MR16-IR, 12V-20W, high output - 24/12 = MR16 halogen, 24V-12W - 24/20 = MR16 halogen, 24V-20W Other colours available.	Blank = no options T = tamper-proof screws* * 690.0454-RL = tamper-proof bit (sold separately)

EXAMPLE: RL40M1-12/20



RL40M SERIES

Remote Fixture

FEATURES

- Quality illumination requires fewer fixtures
- Clear polycarbonate UV and impact resistant lens with optional tamper-proof screws to prevent tampering
- Easy lamp replacement
- CSA certified to C22.2 No.141-15
- Modern design will blend into surroundings
- Selection of Die-Cast or polycarbonate back plate
- For indoor use only