

Type: _____
 Project/Location: _____
 Contractor: _____
 Prepared By: _____
 Date: _____
 Model No.: _____



MINI INVISLITE™ SERIES

For AC Power Generator

TYPICAL SPECIFICATIONS

Supply and install **Ready-Lite® Mini Invislite™ Series**. The unit shall be designed to be completely concealed in walls with a cavity. The equipment shall consist of a metal housing containing two modules joined by a flexible bracket and electric conduit. One module contains the power transformer and electrical connection box; the other module contains the emergency lights installed on the back of a door able to rotate several turns of 360°. The unit equipment shall be completely concealed in the wall, after the installation through a rectangular opening not larger than 8.25" by 5.75".

In stand-by mode, the only visible parts of the unit shall be the off-white flat door and trim plate that can be customized on site with paint or other suitable wall covering. Upon AC power supply the unit will expose the emergency heads by rotating its door 180° and then will power the lamps. At the end of the AC power, the lamps will turn off and the unit will retract the heads by rotating the door 180° in the same direction.

The unit shall not require the presence of AC power in order to close the door and conceal the lights. The door of the unit shall be easy to force-turn (open or close) by hand. The light source shall be 12V MR16 halogen lamps of specified wattage and light output.

The remote unit shall be the **Ready-Lite®** model: _____


REPLACEMENT LAMPS

MODEL	TYPE	VOLTAGE/WATTAGE
580.0080-RI	MR16 flood	12V-12W
580.0064-RL	MR16 flood	12V-20W
580.0083-RL	MR16 flood	12V-35W
580.0076-RL	MR16 flood	12V-50W
580.0068-RL	MR16 IR flood	12V-20W high output
580.0090-RL	MR16 IR flood	12V-35W high output
580.0089-RL	MR16 IR flood	12V-50W high output
580.0093-RL	MR16, LED	12V-4W
580.0104-RL	MR16, LED	12V-5W
580.0106-RL	MR16, LED	12V-6W

For the complete list, please see the lamp chart on pages 166 to 168

DIMENSIONS

Dimensions are approximate and subject to change.

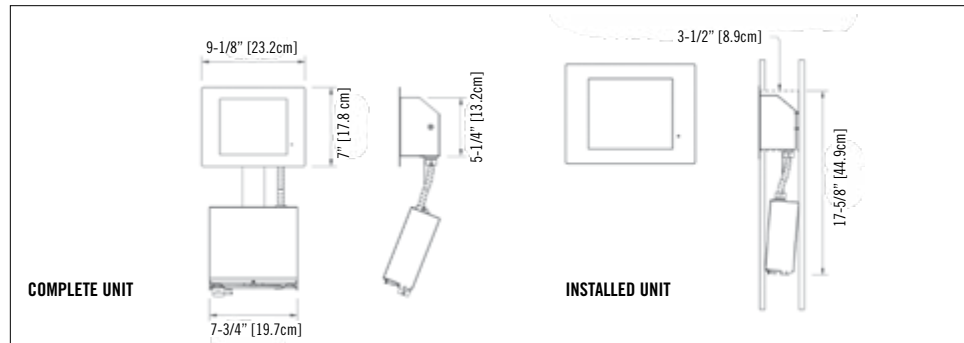

ORDERING INFORMATION

SERIES	UNIT CAPACITY	LAMP WATTAGE	AC VOLTAGE
MH	G= remote AC generator, maximum 100W	/LD7= 2X MR16 LED, 12V-4W /LD9= 2X MR16 LED, 12V-5W /LD10= 2X MR16 LED, 12V-6W /12W= 2X MR16 halogen, 12V-12W /20W= 2X MR16 halogen, 12V-20W /35W= 2X MR16 halogen, 12V-35W /50W= 2X MR16 halogen, 12V-50W /20WH= 2X MR16-IR halogen, 12V-20W, high output /35WH= 2X MR16-IR halogen, 12V-35W, high output /50WH= 2X MR16-IR halogen, 12V-50W, high output	Blank= 120VAC 2= 277VAC 3= 347VAC

EXAMPLE: MHG12W