



LEGEND™ SERIES

Surface Designer Series



Type: _____
 Project/Location: _____
 Contractor: _____
 Prepared By: _____
 Date: _____
 Model No.: _____

TYPICAL SPECIFICATIONS

The contractor will supply and install **Ready-Lite® Legend™ Series** remote heads. These remote heads will consist of either single, double or triple head configurations according to the design. Remote heads will be constructed of durable powder coated, Die-Cast aluminum and use MR16 halogen light sources.

The remote fixtures shall be certified to CSA C22.2 No.250.

The unit shall be **Ready-Lite®** model: _____.

WIRE GUARDS

460.0029-RL	wall mount single remote
460.0032-RL	wall mount double remote
460.0078-RL	wall mount triple remote


REPLACEMENT LAMPS

MODEL	LAMP TYPE	VOLTAGE-WATTAGE
580.0074-RL	MR16 flood	6V-6W
580.0080-RL	MR16 flood	12V-12W
580.0077-RL	MR16 flood	24V-20W
580.0097-RL	MR16, LED	6V-4W
580.0093-RL	MR16, LED	12V-4W
580.0104-RL	MR16, LED	12V-5W
580.0106-RL	MR16, LED	12V-6W
580.0098-RL	MR16, LED	24V-4W
580.0100-RL	MR16, LED	24V-6W
580.0113-RL	MR16, LED	120V-4W

For the complete list, please see the lamp chart on pages 166 to 168

DIMENSIONS

Dimensions are approximate and subject to change.

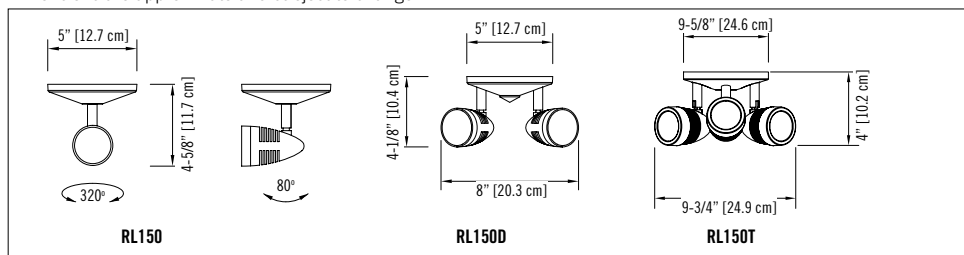

FEATURES

- Contemporary, enduring design
- Available in 1, 2 or 3 head configurations
- Highly resistant powder-coated, Die-Cast aluminum construction
- MR16 halogen lamps: 6W, 10W, 12W, 20W, 35W and 50W MR16 LED lamps: 4W, 5W and 6W
- CSA certified to C22.2 No.141-15

ORDERING INFORMATION

SERIES	# OF HEADS	COLOUR	LAMP TYPE/VOLTAGE/WATTAGE
RL150= closed	Blank= one head D= two heads T= three heads	Blank= white -B= black	-LD1= MR16 LED, 6V-4W -LD7= MR16 LED, 12V-4W -LD9= MR16 LED, 12V-5W -LD10= MR16 LED, 12V-6W -LD13= MR16 LED, 24V-4W -LD14= MR16 LED, 24V-6W -LD26= MR16 LED, 120V-4W -6/6= MR16 halogen, 6V-6W -6/10= MR16 halogen, 6V-10W -12/12= MR16 halogen, 12V-12W -12/20= MR16 halogen, 12V-20W -12/35= MR16 halogen, 12V-35W -12/50= MR16 halogen, 12V-50W -24/12= MR16 halogen, 24V-12W -24/20= MR16 halogen, 24V-20W -24/35= MR16 halogen, 24V-35W -24/50= MR16 halogen, 24V-50W -12/20H= MR16-IR, 12V-20W, high output -12/35H= MR16-IR, 12V-35W, high output

EXAMPLE: RL150-6/6