

Type: _____
 Project/Location: _____
 Contractor: _____
 Prepared By: _____
 Date: _____
 Model No.: _____



TYPICAL SPECIFICATIONS

The contractor will supply and install **Ready-Lite® RLR Legend™ Collection** recessed heads and housing. Recessed heads will be constructed of durable powder coated metal and use MR16 halogen lamps. The light source will be _____ V, _____ W MR16 halogen wide beam (flood) or otherwise specified.

The remote unit shall be **Ready-Lite®** model: _____, housing shall be **Ready-Lite®** model: _____.

REPLACEMENT LAMPS

MODEL	LAMP TYPE	VOLTAGE/WATTAGE
580.0079-RL	MR16	6V-10W
580.0080-RL	MR16	12V-12W
580.0077-RL	MR16	24V-20W
580.0100-RL	MR16, LED	24V-6W
580.0104-RL	MR16, LED	12V-5W
580.0106-RL	MR16, LED	12V-6W

For the complete list, please see the lamp chart on pages 166 to 168

HOUSING



RL-GRHR03	non-insulated ceiling 6-24V	new construction
RL-GRHR04	non-insulated ceiling 6-24V	renovation
RL-GRHR05	non-insulated ceiling 120V GU10	new construction
RL-GRHR06	insulating ceiling 6-24V	new construction

MR16 LED COMPATIBILITY CHART

HEAD STYLE	6V-4W	12V-4W	24V-4W	12V-5W	12V-6W
RLR8R	x	x	x	x	x
RLR9	x	x	x	x	x
RLR2	-	-	-	-	-


DIMENSIONS

Dimensions are approximate and subject to change.

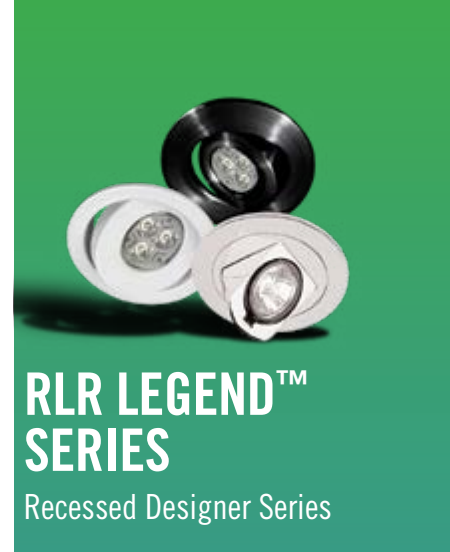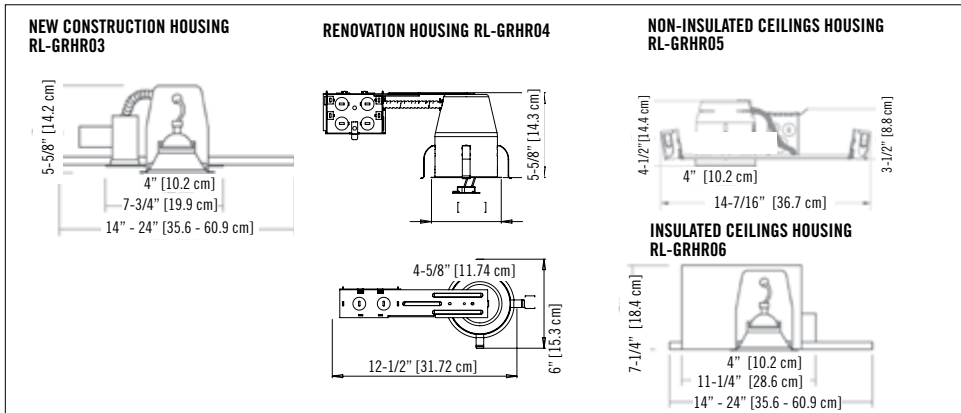

FEATURES

- Contemporary, enduring designs
- 4W, 5W, 6W, 10W, 12W, 20W, 35W and 50W lamps
- Wide beam MR16 (flood) or LED light source
- Will blend in with regular decorative recessed fixtures
- Choice of housing for new construction or insulated ceiling
- RLR8R is made of powder coated or electro-plate steel
- RLR9 and RLR2 are made of Die-Cast aluminum

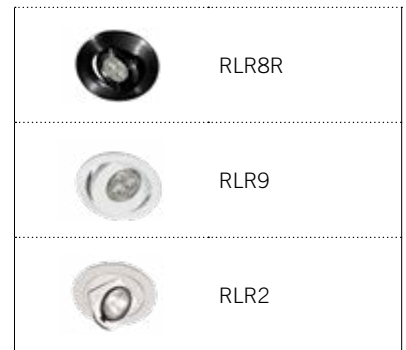

ORDERING INFORMATION

SERIES	HEAD STYLE	COLOUR	VOLTAGE / WATTAGE		OPTIONS
RLR= decorative recessed remote	8R= concave (tilting round rear load) 9= concave (egress/regress) 2= pop-out*	BK= black (8R & 9 series only) BN= brushed nickel (8R & 2 series only) WH= white	LD1= MR16 LED, 6V-4W LD7= MR16 LED, 12V-4W LD9= MR16 LED, 12V-5W LD10= MR16 LED, 12V-6W LD13= MR16 LED, 24V-4W LD14= MR16 LED, 24V-6W LD25= MR16 LED, 120V-4W 6/6= MR16 halogen, 6V-6W 6/10= MR16 halogen, 6V-10W 12/12= MR16 halogen, 12V-12W 12/35= MR16 halogen, 12V-35W	12/50= MR16 halogen, 12V-50W 24/12= MR16 halogen, 24V-12W 24/20= MR16 halogen, 24V-20W 24/35= MR16 halogen, 24V-35W 24/50= MR16 halogen, 24V-50W 120/20= MR16, GU10, 120V-20W* 120/35= MR16, GU10, 120V-35W* 120/50= MR16, GU10, 120V-50W* 12/20H= MR16-IR, 12V-20W, high output 12/35H= MR16-IR, 12V-35W, high output	PM= complete with pendant mount backbox*
	*LED'S and GU10's not available			*Available with RL-GRH05 housing and with 8R & 9 head	* pendant kit sold separately

EXAMPLE: RLR8RBKLD1