



TUF-NM SERIES

NEMA-4X
certified remote fixture

new product



Type:	_____
Project/Location:	_____
Contractor:	_____
Prepared By:	_____
Date:	_____
Model No.:	_____

TYPICAL SPECIFICATIONS

Supply and install **Ready-Lite® TUF-NM Series** remote emergency lighting fixtures. These remote fixtures will consist of either single or double lamp configurations according to the design. These fixtures shall be fully gasketed with a UV resistant and fire retardant polycarbonate back plate with a clear heavy-duty UV resistant polycarbonate lens. The unit shall be equipped with two emergency heads with tool-less adjustable swivels. Units shall be NEMA-4X and NSF certified and specifically designed for high abuse areas, wet and cold weather locations, food processing plants, as well in applications requiring a resistance to corrosive agents. The standard unit will come with stainless steel tamper-proof screws and bit. The remote fixture shall be certified to CSA C22.2 No.141-15. The head(s) shall be fully adjustable without tools and should be equipped with MR16 halogen lamp(s) of _____ V _____W.

The remote unit shall be the **Ready-Lite®** model: _____ .

FEATURES

- Fully gasketed with a selection of cast aluminum or polycarbonate back plate
- Clear polycarbonate UV and impact resistant lens
- Choice of single or double lamp models
- Available in 6, 12 and 24V models MR16 or LED
- Easy lamp replacement
- Comes standard with tamper-proof screws and bit
- NSF Certified for food processing plants
- NEMA-4X Certified*
- CSA Certified to C22.2 No.141-15
- Suitable for indoor/outdoor installation

*For NMMP, units are NEMA-4X Certified when installed using a circular NEMA-4X rated junction box (sold separately by Thomas&Betts under P/N CE365D-CAR or CE365DW-CAR and with plugs P/N P7701W-CAR).



WIRE GUARDS

460.0029-RL	wall mount or ceiling mount
-------------	-----------------------------

REPLACEMENT LAMPS: MR16 TUF-NMMP

ORDERING CODE	LAMP TYPE	VOLTAGE
580.0074-RL	MR16 flood	6V-6W
580.0079-RL	MR16 flood	6V-10W
580.0080-RL	MR16 flood	12V-12W
580.0070-RL	MR16 flood	24V-12W
580.0097-RL	MR16, LED	6V-4W
580.0093-RL	MR16, LED	12V-4W
580.0104-RL	MR16, LED	12V-5W
580.0106-RL	MR16, LED	12V-6W
580.0098-RL	MR16, LED	24V-4W

REPLACEMENT LAMPS: MR16 TUF-NMM


ORDERING CODE	LAMP TYPE	VOLTAGE
580.0068-RL	MR16 IR flood	12V-20WH
580.0077-RL	MR16 flood	24V-20W
580.0100-RL	MR16 LED	24V-6W
580.0113-RL	MR16, LED	120V-4W

Type: _____
 Project/Location: _____
 Contractor: _____
 Prepared By: _____
 Date: _____
 Model No.: _____



DIMENSIONS

Dimensions are approximate and subject to change.

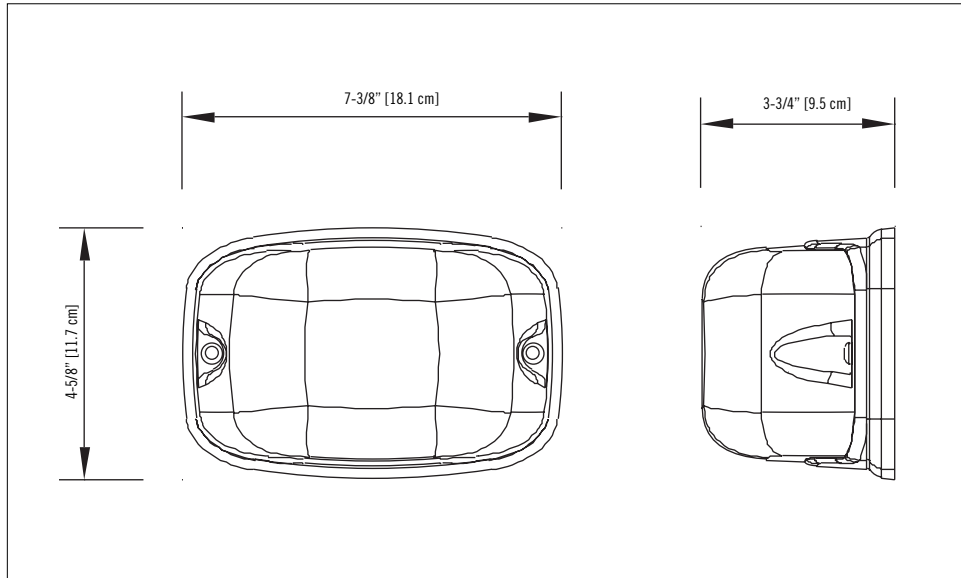

TUF-NM SERIES
 NEMA-4X
 certified remote fixture

ORDERING INFORMATION: TUF-NMMP

SERIES	NUMBER OF LAMPS	LAMP TYPE/VOLTAGE/WATTAGE	COLOUR	OPTIONS
NMMP = polycarbonate NEMA-4X back plate	1= one lamp 2= two lamps	-LD1= MR16 LED, 6V-4W -LD7= MR16 LED, 12V-4W -LD9= MR16 LED, 12V-5W -LD10= MR16 LED, 12V-6W -LD13= MR16 LED, 24V-4W -6/6= MR16 halogen, 6V-6W -6/10= MR16 halogen, 6V-10W -12/12= MR16 halogen, 12V-12W -24/12= MR16 halogen, 24V-12W	Blank= factory white BK= black GY= grey	-SM= surface mount* *Surface plastic junction box included.

EXAMPLE: NMMP1-6/6

ORDERING INFORMATION: TUF-NMM

SERIES	NUMBER OF LAMPS	LAMP TYPE/VOLTAGE/WATTAGE	COLOUR
NMM = die-cast NEMA-4X back plate	1= one lamp 2= two lamps	-LD1= MR16 LED, 6V-4W -LD7= MR16 LED, 12V-4W -LD9= MR16 LED, 12V-5W -LD10= MR16 LED, 12V-6W -LD13= MR16 LED, 24V-4W -LD14= MR16 LED, 24V-6W -LD26= MR16 LED, 120V-4W -6/6= MR16 halogen, 6V-6W -6/10= MR16 halogen, 6V-10W -12/12= MR16 halogen, 12V-12W -12/20H= MR16-IR, 12V-20W, high output -24/12= MR16 halogen, 24V -12W 24/20= MR16 halogen, 24V-20W	Blank= factory white BK= black GY= grey

EXAMPLE: NMM1-12/20H