

Technical Specifications



**Applications:**

- Security and general outdoor lighting fixture for residential and commercial applications.
- Accent lighting fixture for highlighting outdoor signs and architectural details.
- Compact outdoor lighting fixture which can be mounted easily in most places and can be aimed in any direction.
- Suitable for use in wet locations.

**Features/Benefits:**

- Clean lines and precision manufacturing result in a fixture which will enhance any application.
- High-quality replaceable porcelain socket with high-temperature leads allow for easy field maintenance.
- Positive locking mounting arm keeps fixture in aimed position to reduce costly call-backs.
- Ground screw boss in arm.


**Standard Materials:**

- Fixture: Certified die cast zinc alloy ZAMAK 3 (\*less than .004 copper content), or non-metallic.
- Gasket: Heat resistant composition or high-temperature silicone.
- Socket: Center contact, porcelain, medium base.

**Compliances:**

Compliances as noted on each page of the catalogue include:

- CSA Certified
- UL Listed
- C-UL Listed

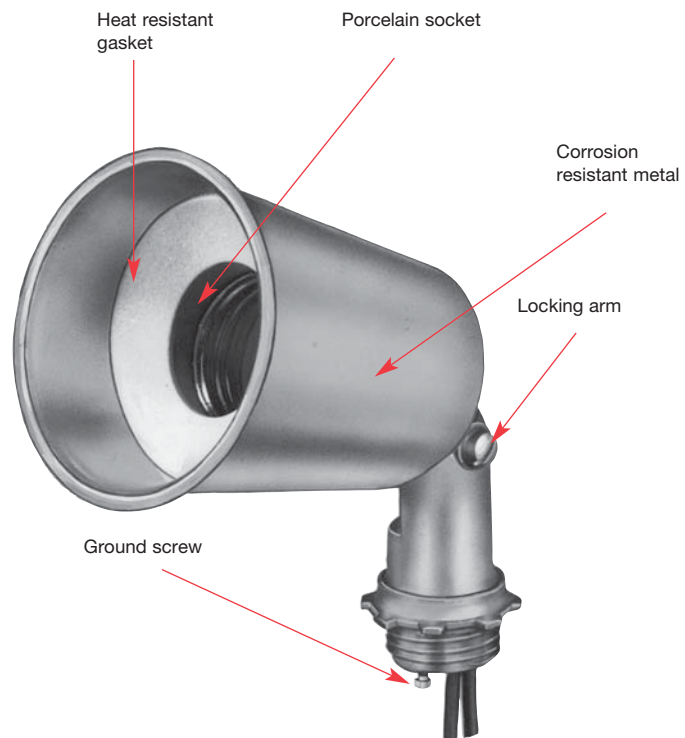


# Outdoor Lampholders



L-80

DL-80

L-800

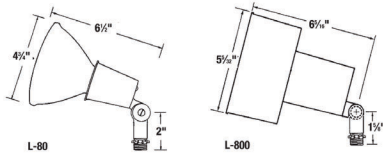

LG-80



S500E



S513E

Cat. No.	Finish	Wattage
<b>Economy Style – Internal Gasket (Zinc)</b>		
L-80	Silver	For 75 to 150 Watt Par 38 and R40 Lamps
DL-80	Silver	
<b>Deep-Shielded Style – Internal Gasket (Zinc)</b>		
L-800	Silver	For 75 to 150 Watt Par 38 and R40 Lamps
<b>Utility Style – External Gasket (Zinc)</b>		
S500E	Silver	For 75 to 150 Watt Par 38 and R40 Lamps
S500BRE	Bronze	
S500WHE	White	
<b>Double Economy Style Lampholders with Round Cover (Zinc)</b>		
S513E	Silver	For up to 150 Watt Par 38 and R40 Lamps
S513BRE	Bronze	
S513WHE	White	

1/2 threaded arm




LC-11 / LF-11



LC-21




LC-31

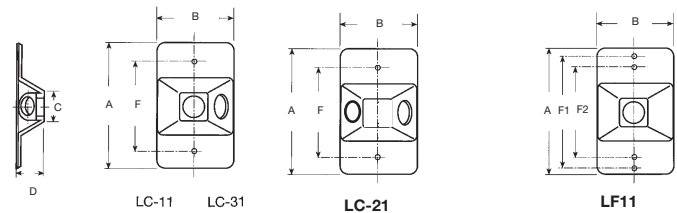

Cat. No.	Description	A	B	C	D	F	F1
<b>Wire Guard</b>							
LG-80 <sup>(1)</sup>	Wire guard for L-80 Series	-	-	-	-	-	-
<b>Lampholder Rectangular Covers (Zinc)</b>							
LC-11	Lampholder cover with one 1/2" tapped hole	4-9/16	2-13/16	1-5/32	1	-	-
LC-21	Two 1/2" tapped holes					3-9/32	-
LC-31	Three 1/2" tapped holes					-	-
<b>Jumbo Lampholder Rectangular Cover (Zinc)</b>							
LF11 <sup>(1)</sup>	Lampholder cover with one 1/2" tapped hole (supplied with knockouts)	5-1/8	3-1/8	1-5/32	1-1/16	3-9/32	4-1/2
<b>Blank Outlet Cover (Stamped Aluminum)</b>							
CCRB <sup>(1)</sup>	5" round blank outlet cover with screws. Mounting holes are 3-1/2" on center. Painted white.	5	3-1/2	-	5/32	-	-

<sup>(1)</sup> CSA not applicable

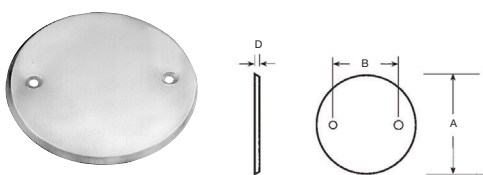

CCRB



Dimensions are in inches.  
Covers packed with device plates, gasket and screws.



P8001W-CAR



P8010W-CAR



P8060W-CAR



P8005W-CAR



P78010W-CAR



P79010W-CAR



CE365D-CTN



CE365DW-CTN





P7701W-CAR

Cat. No.	Finish	Wattage
<b>No-tool Lampholder with Gasket (Non-metallic)</b>		
<b>P8001W-CAR</b>	White	Accepts 150 watt max. or 300 watt (Incandescent only)
<b>Lampholder with Round Covers - Internal Gasket (Non-metallic)</b>		
<b>P8010W-CAR</b>	White	Accepts 150 watt max. or 300 watt (Incandescent only)
<b>P8060W-CAR</b>	White	Accepts 150 watt max. or 300 watt (Incandescent only)
<b>Lampholder with Rectangular Cover - Internal Gasket (Non-metallic)</b>		
<b>P8005W-CAR</b>	White	Accepts 150 watt max. or 300 watt (Incandescent only)

Cat. No.	Finish
<b>Lampholder Round Cover (Non-metallic)</b>	
<b>P7801W-CAR</b>	White
<b>Lampholder Rectangular Cover (Non-metallic)</b>	
<b>P7901W-CAR</b>	White

Cat. No.	Finish	Hub Size	No. of Lug	A	B	D
<b>Lampholder with Round Covers - Internal Gasket (Non-metallic)</b>						
<b>CE365D-CTN</b>	Grey	5 x 1/2	2	4-1/4	1-1/2	4-15/16
<b>CE365DW-CTN</b>	White					



Cat. No.	Finish
<b>Closure Plug (Non-metallic)</b>	
<b>P7701W-CAR</b>	White

