
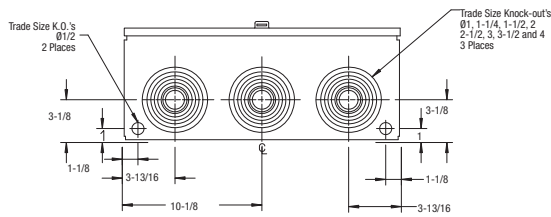


METER SOCKET • 400 AMP. 120/240 VOLTS • SINGLE PHASE SERVICE

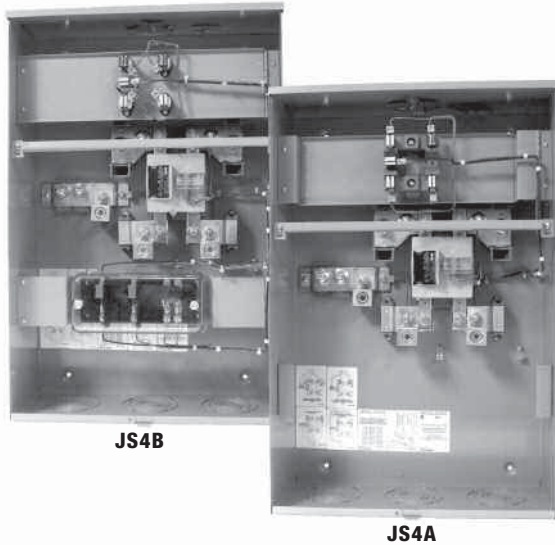

- Permanent red nameplate affixed to front cover warns that removal of meter does not isolate the load terminals; also notice of automatic circuit closing device on JS4A and warning to short circuit current transformer secondary before removal of meter on JS4B
- Meter socket configuration for 5 jaw meters (can be readily converted to suit meter forms requiring 4 blades)
- 400/5 AMP. three-wire current transformer provides low current for service metering proportional to higher current draw. Consumer and Corporate Affairs Canada approved for revenue metering (200/5 and 300/5 AMP. also available)
- Gutter wiring space provided on left side
- Twin covers allow access to either compartment (single cover available on request)
- Hub opening closure plate for underground service. All units can be converted to overhead service with addition of conduit hub and JS250 or JS500 tunnel type connector kit.
- Line side terminations: double 1/2" studs to accommodate compression lugs for underground service (1 x 500 kcmil or 2 x 250 kcmil)
- Hinged bridges and readily removable crossbar with keyholes permit easy wiring without obstructions
- Load side terminations: tunnel type connectors, dual rated for 1 x 500 kcmil or 2 x 250 kcmil
- Fully wired secondary circuits
- 30-5/8" H x 20-1/4" W x 8-3/8" D heavy gauge galvanized steel. Oven-cured grey enamel finish. Weight each: 72 lb / 32.7 kg
- For aluminum JS4's see page 32 for product specs and dimensions
- Three 1-1/4", 1-1/2", 2", 2-1/2", 3", 3-1/2", 4" Bottom Knockouts
- Weatherproof type 3R enclosure


PRODUCT USAGE BY PROVINCE / UTILITY

NFLD	JS4B-4ST	Sask.	JS4A-4TWE	Northern Ont.	JS4A, JS4A-4
Que.	None approved	AB	JS4B-4T	Cornwall Hydro	JS4A-4T, JS4AB-4TW
N.S.	WS, EAL, JS4B-STNS	B.C.	JS4B-4STW	Ottawa Hydro	JS4AB-TW
N.B.	JS4B (EAL)	Hydro Ont.	JS4A, JS4A-200/5, JS4A-300/5, JS4A-4, JS4A-4T, JS4B, JS4B-4 JS4B-ST, JS4AB, JS4A5		
Man.	JS4A-4TW, JS4A-TWK, EAL				




Approved for copper or aluminum (EAL approved for Aluminum.)


METER SOCKET • 400 AMP. 120/240 VOLTS • SINGLE PHASE SERVICE

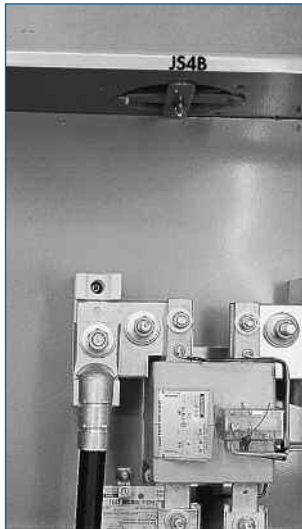


1 x 500 kcmil

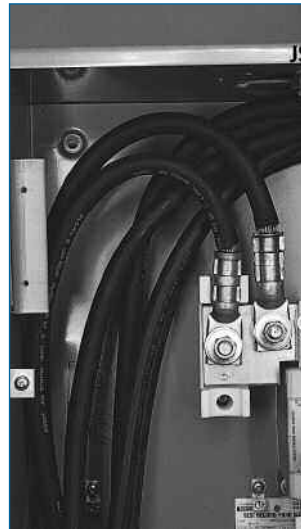

2 x 250 kcmil

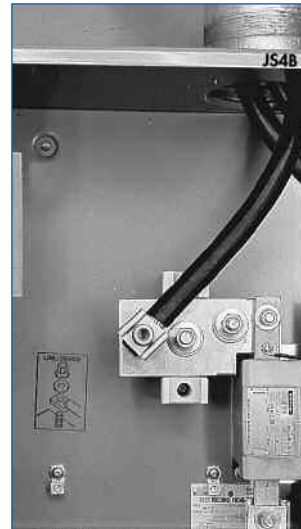

1 x 500 kcmil
with kit no. JS500

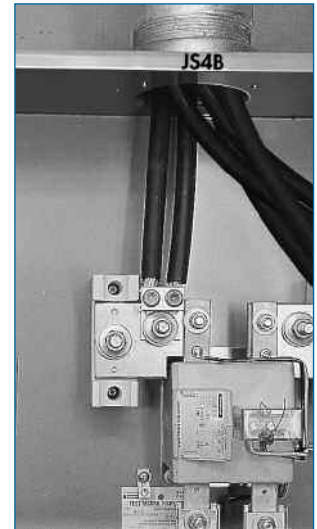

2 x 250 kcmil
with kit no. JS250

UNDERGROUND SERVICE

OVERHEAD SERVICE

Ordering Information


CATALOGUE NUMBER	JS4 UNDERGROUND 400 TO 5 RATIO • 5 JAW • TWIN COVER
JS4A	Equipped with automatic circuit closing device
JS4B	Equipped with test switches
INCLUDE	FACTORY MODIFICATIONS
-4	4 jaw meter socket configuration
-S	Provision only for test switches (test switches supplied by power authority)
-T	Provision only for current transformer (transformer supplied by power authority)
-W	Secondary circuit wiring not included (secondary circuit wired by power authority)
-Z	"Peerless security" collar
-200 / 5	200 to 5 ratio current transformer
-300 / 5	300 to 5 ratio current transformer
CATALOGUE NUMBER	OVERHEAD ENTRY CONVERSION KITS (1 KIT REQUIRED PER SOCKET)
JS250	2 x 250 kcmil tunnel connector kit for line side terminations
JS500	1 x 500 kcmil tunnel connector kit for line side terminations
KIT-JS4B	5 th jaw assembly kit for NB Power

NOTE : Refer to p.36 for "Product usage by Province utility"


Approved for copper or aluminum.




METER SOCKET • 400 AMP. 120/240 VOLTS • SINGLE PHASE SERVICE

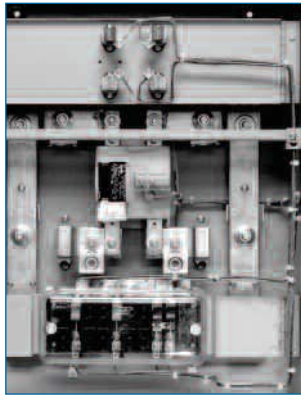

JS4B-EAL

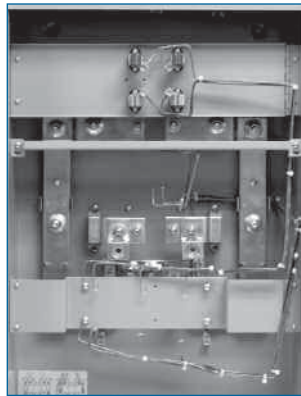

JS4B-4STNSEAL
(Nova Scotia)

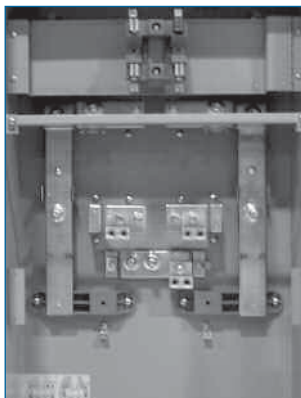

JS4A-4TWEAL
(Manitoba)


Product Specifications

- Line side terminals:
Overhead: 1 x 750 kcmil Alum. or 2 x 350 kcmil Alum.
Underground: 2 x 1/2" stud to accommodate, 1 x 750 kcmil or 2 x 350 kcmil Alum. compression lugs
- Load side terminals: 2 x 6-350 kcmil CU or AL
1 x 750 kcmil CU or AL
- Combination overhead/underground meter socket
- 4 jaws meter socket configuration
- Provision only for current transformer (transformer supplied by power authority)
- Secondary circuit wiring not included (secondary circuit wired by power authority)

Overhead Kit required (1 kit per socket)

JS350 2 x 350 kcmil Overhead Kit

JS750 1 x 750 kcmil Overhead Kit

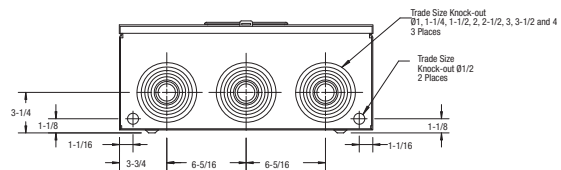

Dimensions are in inches

Ordering Information

CATALOGUE NUMBER	DESCRIPTION	DIMENSIONS (inches)			WEIGHT EACH	
		H	W	D	lb	kg
JS4A-4TWEAL	Aluminum Feed 400A meter socket (Manitoba only)	38	20-1/4	8-1/4	70	31.75
JS4B-EAL	Aluminum Feed 400A meter socket (New Brunswick only)	38	20-1/4	8-1/4	72	32.65
JS4B-4STNSEAL	Aluminum Feed 400A meter socket (Nova Scotia only)	38	20-1/4	8-1/4	72	32.65