


# Sta-Kon®

## Terminals

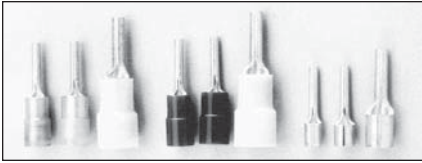

- Provides an easy and effective way to terminate stranded wire into European/metric-style terminal blocks.
- Designed to prevent shorting, wire strand loss and/or wire pullout resulting from improper termination of stranded wire.
- Designed to meet emerging global standards which require wire-to-metric style terminal block installations be terminated with a "pin" style terminal.
- Available in vinyl insulated, nylon insulated, and non-insulated styles.
- All styles offered in 22 AWG to 10 AWG and compatible with existing Sta-Kon® tooling.

### Voltage Rating

Vinyl – 300V  
Nylon – 300V

## Pin Terminals

### Nylon Insulated Terminals

Cat. No.	Pkg. Qty.	Wire Range	D (Dia.)	L	Recommended Tools
<b>Non-Insulated</b>					
A47PT	1000	22-18	.075	.63	WT111M
B47PT	1000	16-14	.075	.63	ERG4002
C55PT	500	12-10	.110	.76	ERG4002
<b>Vinyl</b>					
18RA-47PT	100	22-18	.075	.85	ERG2003
RA47PT	1000	22-18	.075	.85	ERG4001
14RB-47PT	100	16-14	.075	.87	
RB47PT	1000	16-14	.075	.87	ERG4001
10RC-55PT	50	12-10	.110	1.06	
RC55PT	500	12-10	.106	1.06	ERG4001
<b>Nylon</b>					
RA18-47PT	100	22-18	.075	.85	ERG2003
RA147PT	1000	22-18	.075	.85	WT2000
RB14-47PT	100	16-14	.075	.87	
RB147PT	1000	16-14	.075	.87	ERG4001
RC10-55PT	50	12-10	.110	1.06	
RC155PT	500	12-10	.106	1.06	ERG4001

Most standard bulk catalogue numbers can be put on Mylar Tape for reel fed applications (i.e. 12050 tool and application dies). See pages 196-197.

Please put the suffix M for Mylar Tape RA2573M. (Bulk number 1000 and 500 packages.)

