



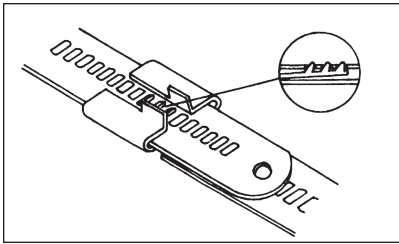

## Multi-Lok™ Stainless Steel Self-Locking Cable Ties

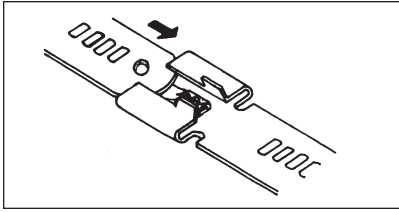

As the free end of the Multi-Lok™ tie passes through the buckle, three separate teeth (four teeth in the 12mm Multi-Lok™) mesh with corresponding slots in the band automatically locking the tie as it is being tensioned. Self-locking Multi-Lok™ Ties feature an extremely strong, unique multiple locking system.

Fire hazards ... corrosive environments ... temperature extremes ... for many cable bundling applications, plastic ties are simply inadequate—or even dangerous.

That's why we developed stainless steel Multi-Lok™ Ties. Unaffected by fire, UV or extreme temperatures, corrosion-resistant Multi-Lok™ Ties provide a safe, strong, worry-free hold.

Quickly and easily applied by hand or with the Thomas & Betts Cable Tie Tensioner or Tensioning hook, Multi-

Lok™ Ties feature a unique, self-locking, multiple-locking system that holds in excess of 200 lb.

Multi-Lok™ Ties are manufactured from Type 316 stainless steel and are available either uncoated or coated with halogen-free, non-toxic black Nylon 11. This weather-resistant coating is unaffected by UV sunlight. This adds resistance to corrosion, chemicals, and weathering. Ties are available in two widths and various lengths.



### Type 316 Stainless Steel–Nylon 11 Coated

Cat. No.	Tensile Strength		Width		Length		Weight	
	lb.		in.	mm	in.	mm	lb.	kg.
<b>TYS6-280C</b>	250		.276	7	6	150	.66	.30
<b>TYS9-280C</b>	250		.276	7	9	225	.99	.45
<b>TYS12-280C</b>	250		.276	7	12	300	1.32	.60
<b>TYS18-280C</b>	250		.276	7	18	450	1.76	.80
<b>TYS24-280C</b>	250		.276	7	24	610	2.64	1.20
<b>TYS6-470C</b>	250		.472	12	6	150	1.10	.50
<b>TYS9-470C</b>	250		.472	12	9	225	1.65	.75
<b>TYS12-470C</b>	250		.472	12	12	300	2.20	1.00
<b>TYS18-470C</b>	250		.472	12	18	450	2.97	1.35
<b>TYS24-470C</b>	250		.472	12	24	610	4.29	1.95

Packaging Quantity: 100/bag  
.010" (.245mm) Thickness

### Type 316 Stainless Steel–Uncoated

Cat. No.	Tensile Strength		Width		Length		Weight	
	lb.		in.	mm	in.	mm	lb.	kg.
<b>TYS6-280</b>	250		.276	7	6	150	.66	.30
<b>TYS9-280</b>	250		.276	7	9	225	.88	.40
<b>TYS12-280</b>	250		.276	7	12	300	1.21	.55
<b>TYS18-280</b>	250		.276	7	18	450	1.98	.90
<b>TYS24-280</b>	250		.276	7	24	610	2.64	1.20
<b>TYS6-470</b>	250		.472	12	6	150	1.10	.50
<b>TYS9-470</b>	250		.472	12	9	225	1.65	.75
<b>TYS12-470</b>	250		.472	12	12	300	2.20	1.00
<b>TYS18-470</b>	250		.472	12	18	450	3.19	1.45
<b>TYS24-470</b>	250		.472	12	24	610	4.29	1.95

Packaging Quantity: 100/bag  
.010" (.245mm) Thickness