

HazFlash




The **HazFlash® M4** strobe lighting fixture is an enclosed and gasketed fixture that is suitable for use in marine and wet locations as well as in a wide range of industrial facilities.

Two models are available: the VXS for outdoor, wet and marine locations and the DXS for Class I, Zone 2, Division 2 and Class II, Division I locations.

Available in a choice of five lens colours, both models provide 60 flashes per minute and are ideally suited for use as a warning of unsafe conditions in areas where noise prevents audible signals from being heard.



HazFlash M4 Catalogue Numbering System

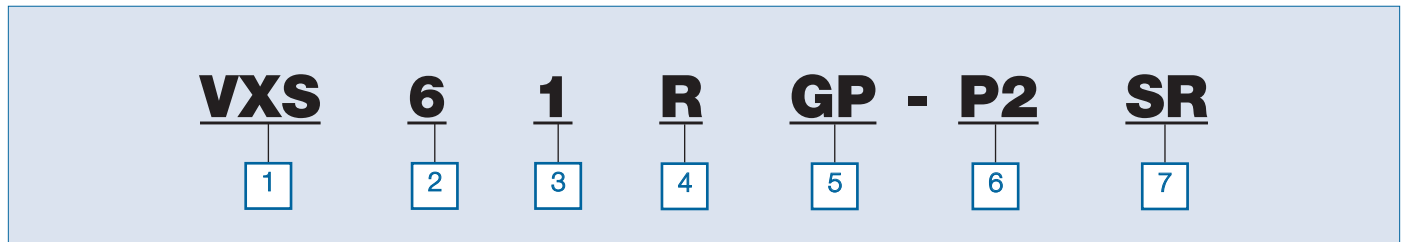

1 — Fixture Series

- VXS** = HazFlash™ M4 Adverse location Xenon Strobe Light
- DXS** = HazFlash™ M4 Class I, Zone 2, Div. 2; Class II Xenon Strobe

2 — Flash Rate

- 6** = 60 Flashes per Minute

3 — Electrical Ratings

- 1** = 120 Volts AC, 50/60 Hz
- 2** = 240 Volts AC, 50/60 Hz
- 8** = 10-30 Volts DC
- 9** = 90-130 Volts DC

4 — Lens Colour

- R** = Red
- B** = Blue
- C** = Clear
- G** = Green
- A** = Amber

5 — Optics and Guards

- G** = Polycarbonate Globe (Standard)
- GP** = Polycarbonate Globe and Polymeric Guard
- TG** = Tempered Glass Globe
- TGP** = Tempered Globe and Polymeric Guard

6 — Mounting Style

- P2** = 3/4 in. Pendant Mount
- C2** = 3/4 in. Ceiling Mount
- B2** = 3/4 in. Wall Mount with Box
- S4** = 1-1/4 in. Angle Stanchion Mount

7 — Options

- SR** = Sealing Ring Kit for Inverted Mounting (Maintains Marine Listing in Globe Up Position)

Hazflash M4 Accessories

VXS STROBE LIGHT REPLACEMENT PARTS

CATALOGUE NUMBER	DESCRIPTION
XSFT	Flash Tube
XSFL-R	Fresnel Lens — Red
XSFL-B	Fresnel Lens — Blue
XSFL-C	Fresnel Lens — Clear
XSFL-G	Fresnel Lens — Green
XSFL-A	Fresnel Lens — Amber
VGU-15P	Polycarbonate Guard
VGT15	Tempered Glass Globe
VGL15P	Polycarbonate Globe
SRKIT-1	Sealing Ring Kit — includes sealing ring and gasket



- Class I — Zone 2, Groups IIC, IIB, IIA,
— Division 2, Groups A, B, C and D
- Class II — Division 1, Groups E, F and G
Enclosed and Gasketed
- Outdoor Wet Locations, NEMA 3R
- Outdoor Marine, NEMA 4X, IP66



HazFlash M4 Dimensions

