

Aluminum tapered tees

For aluminum and copper connections



AT 350-350


For aluminum and copper connections, these dual-rated components suit you to a tee

- Provides high strength and high conductivity
- Use with aluminum and copper conductors
- Prevents oxidation
- Easy identification
- Meets or exceeds ANSI C119.4 specifications

For aluminum and copper connections

Cat. no.	Conductor range (AWG or kcmil)		Dimensions (in.)	
	Run	Tap	L	T
AT 2-4	#2	#4	5½	2½
AT 2-2	#2	#2	5½	2½
AT 1/0-4	1/0	#4	5½	2½
AT 1/0-2	1/0	#2	5½	2½
AT 1/0-1/0	1/0	1/0	5½	2½
AT 2/0-2	2/0	#2	5½	2½
AT 2/0-1/0	2/0	1/0	6	2½
AT 2/0-2/0	2/0	2/0	6	2½
AT 3/0-2	3/0	#2	6	3
AT 3/0-1/0	3/0	1/0	6	3
AT 3/0-3/0	3/0	3/0	6	3
AT 4/0-2	4/0	#2	6	3
AT 4/0-1/0	4/0	1/0	6	3
AT 4/0-2/0	4/0	2/0	6	3
AT 4/0-4/0	4/0	4/0	6	3¾
AT 250-2	250	#2	6	3¾
AT 250-1/0	250	1/0	6	3¾
AT 250-2/0	250	2/0	6	3¾
AT 250-3/0	250	3/0	6	3¾
AT 250-250	250	250	6	3¾
AT 300-1/0	300	1/0	6¾	3¾
AT 300-2/0	300	2/0	6¾	3¾
AT 300-4/0	300	4/0	6¾	3¾
AT 300-300	300	300	6¾	3¾

Cat. no.	Conductor range (AWG or kcmil)		Dimensions (in.)	
	Run	Tap	L	T
AT 350-2	350	#2	6¾	2½
AT 350-1/0	350	1/0	6¾	2½
AT 350-3/0	350	3/0	6¾	3
AT 350-4/0	350	4/0	6¾	3
AT 350-350	350	350	6¾	3¾
AT 500-1/0	500	1/0	8	3
AT 500-4/0	500	4/0	8	3
AT 500-350	500	350	8	3¾
AT 500-500	500	500	8	3¾
AT 750-1/0	750	1/0	8	2½
AT 750-4/0	750	4/0	8	3
AT 750-350	750	350	8	3¾
AT 750-500	750	500	9	3¾
AT 750-750	750	750	9	3¾
AT 1000-4/0	1,000	4/0	9¾	3¾
AT 1000-350	1,000	350	9¾	3¾
AT 1000-500	1,000	500	9¾	5½
AT 1000-750	1,000	750	9¾	7¾
AT 1000-1000	1,000	1,000	9¾	7¾

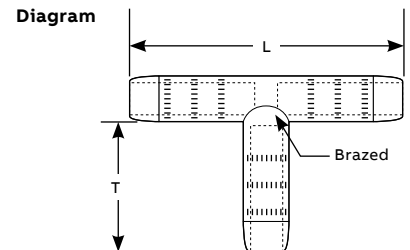

For tin-plated option, add "-TN" suffix to the catalogue number.
For other available sizes, please consult your ABB representative.

Aluminum tapered tees

For high-voltage applications



ATT 350-350


Tees available in many run and tap sizes for your high-voltage applications

- Provides high strength and high conductivity
- Enable use in high-voltage applications up to 69 kV
- Use with aluminum and copper conductors
- Prevents oxidation
- Easy identification
- Meets or exceeds ANSI C119.4 specifications

For high-voltage applications

Cat. no.	Conductor range (AWG or kcmil)		Dimensions (in.)	
	Run	Tap	L	T
ATT 2-4	#2	#4	4¼	2½
ATT 2-2	#2	#2	4¼	2½
ATT 1/0-4	1/0	#4	5½	2½
ATT 1/0-2	1/0	#2	5½	2½
ATT 1/0-1/0	1/0	1/0	5½	2½
ATT 2/0-2	2/0	#2	6	2½
ATT 2/0-1/0	2/0	1/0	6	2½
ATT 2/0-2/0	2/0	2/0	6	2½
ATT 3/0-2	3/0	#2	6⅝	3
ATT 3/0-1/0	3/0	1/0	6⅝	3
ATT 3/0-3/0	3/0	3/0	6⅝	3
ATT 4/0-2	4/0	#2	6⅝	2½
ATT 4/0-1/0	4/0	1/0	6⅝	2½
ATT 4/0-2/0	4/0	2/0	6⅝	2½
ATT 4/0-4/0	4/0	4/0	6⅝	3
ATT 250-2	250	#2	6⅝	3
ATT 250-1/0	250	1/0	6⅝	3
ATT 250-2/0	250	2/0	6⅝	3
ATT 250-3/0	250	3/0	6⅝	3
ATT 250-250	250	250	6⅝	3
ATT 300-1/0	300	1/0	6⅝	3½
ATT 300-2/0	300	2/0	6⅝	3½
ATT 300-4/0	300	4/0	6⅝	3½
ATT 300-300	300	300	6⅝	3½

Cat. no.	Conductor range (AWG or kcmil)		Dimensions (in.)	
	Run	Tap	L	T
ATT 350-2	350	#2	6⅝	2½
ATT 350-1/0	350	1/0	6⅝	2½
ATT 350-3/0	350	3/0	6⅝	3
ATT 350-4/0	350	4/0	6⅝	3
ATT 350-350	350	350	6⅝	3½
ATT 400-1/0	400	1/0	7¾	4
ATT 400-4/0	400	4/0	7¾	4
ATT 400-400	400	400	7¾	4
ATT 500-1/0	500	1/0	7¾	4
ATT 500-4/0	500	4/0	8	3
ATT 500-350	500	350	8	3½
ATT 500-500	500	500	8	5½
ATT 750-1/0	750	1/0	8	3
ATT 750-4/0	750	4/0	8	3
ATT 750-350	750	350	8	3½
ATT 750-500	750	500	9	5½
ATT 750-750	750	750	9	4
ATT 1000-4/0	1,000	4/0	9⅞	3½
ATT 1000-350	1,000	350	9⅞	3½
ATT 1000-500	1,000	500	9⅞	5½
ATT 1000-750	1,000	750	9⅞	6
ATT 1000-1000	1,000	1,000	9⅞	6
ATT 1500-1500	1,500	1,500	14	6

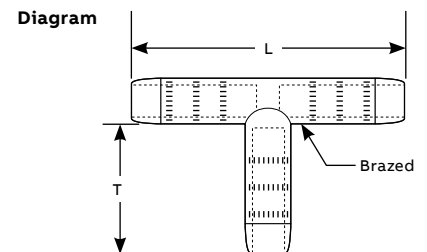

For tin-plated option, add "-TN" suffix to the catalogue number.
 For other available sizes, please consult your ABB representative.