

Type II® Winged


The Marrette® Type II® Winged wire connector is design engineered for additional twisting power to meet the high quality expectations of the electrical professional.

External Cap

- Made of tough, durable polypropylene and 105°C rated to withstand high installation pressures.
- Long-Wing™ design for smooth hand application. The long, off-set wings with raised edges offer a full-length, “finger-friendly” gripping surface. Torque can be selectively applied exactly where you want it:
 - Top - for tight finger locations
 - Bottom - for large wire bundles
- Ribbed body surface gives additional grip, even when hands are greasy or damp.
- Deep, wide throat ensures full insulation coverage.
- Threaded entry helps guide large wire bundles into the spring chamber.
- Colour-coded for quick and easy size selection.

Inner Spring

- Live Action® variable volume spring expands to accommodate a wide range of wire combinations.
- Square wire construction gives a positive conductor bite to solid or stranded wires.
- Unique copper-coated spring helps resist corrosion.
- Approved for circuits up to 600 V, and lighting fixtures and signs up to 1000 V.
- For copper conductor only.
- Convenient packaging - sized right and job-site ready!

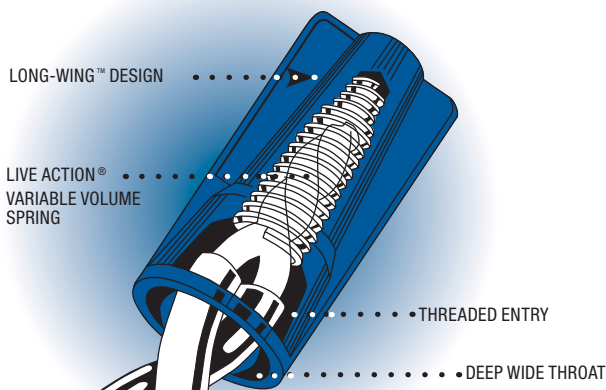

Type II® Winged

Ordering Information

Model	Colour	AWG Wire Range							
		22	18	16	14	12	10	8	6
739	blue				Min.: 3 #12	Max.: 2 #6			
Drivers									
TOOL-WING	Plastic driver to install model 739 (included in 739KP package)								

Note: Refer to page A28 for related Wire Combination Reference Guide

Packaging Options

	Cat. No.	Packaging Format	Quantity per Package	Std. Pkg. (Min./Mult.)
739	739B	Window Box (Retail market only*)	15/Box	10 Boxes
	739C	Card (Retail market only*)	3/Card	20 Cards
	739P	Propak	50	500 Units
	739KP	Releasable Bag	100	2,500 Units
	739Q	Flip-Pak	250	250 Units

* Retail: Order 1 each for one (1) Card/Box/Flip-Pak