



MQM-HZ Series

Hazardous Locations




FEATURES

- Quality illumination requires fewer fixtures
- Certified Class I Zone 2, Groups IIA, IIB and IIC
- Certified Class I Division 2, Groups A, B, C and D as per CSA C22.2 No.137-M1981
- Temperature Codes: T3B (10W and 12W MR16 lamps) and T2C (20W MR16 lamps), as per Canadian Electrical Code, Part I and CSA C22.2 No.137-M1981)
- Extreme operational temperature range: -40°C (-40°F)
- Choice of single- or double-lamp models
- High-efficacy LED lamps of 4W, 5W and 6W
- Input voltage: 6V, 12V, 24V or 120V
- Fully gasketed die-cast aluminum back plate
- Clear polycarbonate cover, UV and impact resistant
- Easy installation on a 4-inch octagonal box (included)
- Comes standard with tamper-proof screws and bit
- Certified to CSA 22.2 No.141-15

See warranty details at: www.tnb.ca/en/brands/lumacell

DIMENSIONS

Dimensions are approximate and subject to change.

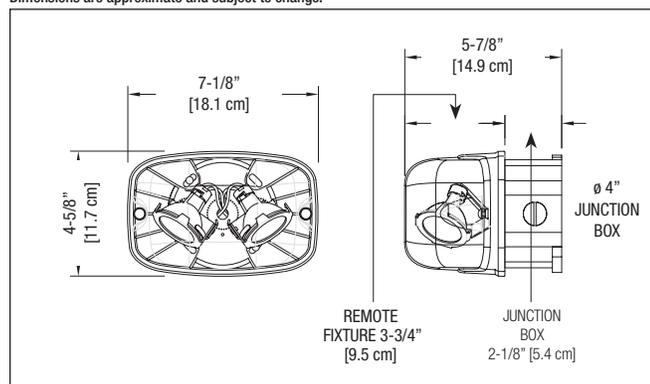

TYPICAL SPECIFICATIONS

Supply and install **Lumacell® MQM-HZ Series** remote emergency lighting fixture. The fixture shall have a single- or double-lamp configuration (as specified) and shall include a fully gasketed die-cast aluminum back plate and a clear heavy-duty UV resistant polycarbonate cover. The fixture shall come standard with a 4-inch octagonal box, stainless steel tamper-proof screws and dedicated screwdriver bit.

The fixture shall be certified for use in hazardous locations Class I, Division 2, Groups A, B, C and D and shall be listed to CSA C22.2 No. 141 and CSA C22.2 No.137-M1981. The fixture shall be rated with a temperature code for the selected lamps as in the table below.

Each lamp in the fixture shall be able to be oriented without tools and should be equipped with LED lamp(s) of _____ V _____ W.

The remote fixtures shall be certified to CSA 22.2 No.141-15

The remote unit shall be the **Lumacell®** model:

MQM _____ HZ _____ .

REPLACEMENT LAMPS

ORDERING CODE	LAMP TYPE	VOLTAGE/WATTAGE	TEMPERATURE CODE
580.0097-L	MR16 LED	6V-4W	T4A (Max. 120°C)
580.0122-L	MR16 LED	6V-5W	T4A (Max. 120°C)
580.0093-L	MR16 LED	12V-4W	T5 (Max. 100°C)
580.0104-L	MR16 LED	12V-5W	T4A (Max. 120°C)
580.0106-L	MR16 LED	12V-6W	T4 (Max. 135°C)
580.0098-L	MR16 LED	24V-4W	T5 (Max. 100°C)
580.0113-L	MR16 LED	120V-4W	T4A (Max. 135°C)

IN THE SAME FAMILY: CLASS 1, DIV. 2



- 3LER-HZ Series
Exit Sign



- RG-HZ Series
Battery Unit

ORDERING INFORMATION

SERIES	VOLTAGE/WATTAGE/LAMP TYPE		COLOUR
MQM1HZ= single lamp MQM2HZ= double lamp	LD1= MR16 LED, 6V-4W LD2= MR16 LED, 6V-5W LD7= MR16 LED, 12V-4W LD9= MR16 LED, 12V-5W	LD10= MR16 LED, 12V-6W LD13= MR16 LED, 24V-4W LD26= MR16 LED, 120V-4W	SG= silver grey

EXAMPLE: MQM1HZLD9SG