



CM-SB Series


Steel battery unit

FEATURES

- Steel housing with lightweight thermoplastic fully adjustable 2W, long life LED heads
 - Suitable for wall mount application
 - Fully adjustable LED glare-free lens
 - Can power CM-R1 and CM-R2 remote fixtures only
 - Standard 120/347VAC input with line cord kit
 - Lead-acid battery
 - Up to 120 minutes of emergency lighting
 - Red LED charger monitor
 - Momentary test switch allows for quick operational check
 - CSA C22.2 No.141-15 certified
- See warranty details at: www.tnb.ca/en/brands/lumacell

DIMENSIONS

Dimensions are approximate and subject to change.

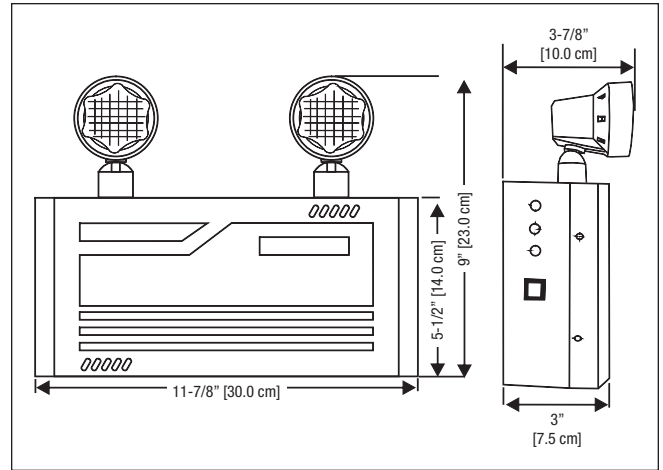

POWER CONSUMPTION AND UNIT RATING

MODEL	AC SPECS			
		WATTAGE	CURRENT	EFFICIENCY
CM-SB-L	120V, 50/60Hz	3.2W	0.03A	0.97PF
	277V, 50/60Hz	3.4W	0.014A	0.92FP
	347V, 50/60Hz	3.6W	0.01A	0.92PF

ORDERING INFORMATION

SERIES	VOLTAGE
CM-SB-L= 27W	Blank= 120VAC-347VAC

EXAMPLE: CM-SB-L