

TYPICAL SPECIFICATIONS

Supply and install the **Ready-Lite® CS5000 Series** LED “SORTIE” Exit Signs. The equipment shall operate with universal two-wire AC input voltage of 120VAC to 347VAC at less than 1.5W and universal two-wire DC input voltage from 6VDC to 24VDC at less than 1.5W for single or double face signs.

The housing shall be constructed of rugged extruded aluminum and have a maximum depth of 2-1/2”. The faceplate(s) shall be constructed of extruded aluminum and come standard with knockout chevrons.

The light source shall be light emitting diodes (LED). The LED lamps shall provide illumination in normal and emergency operation and shall be mounted inside the exit housing. The red LED technology shall be **ALINGAP**. An LED-sensitive diffuser shall be mounted behind the legend to provide the 6” high by 3/4” stroke letters with even illumination. The Exit Sign in a Self-Powered configuration shall stay illuminated during emergency operation for at least 60 minutes upon AC failure.

The Exit Sign shall be CSA-C860 approved.


The equipment shall be **Ready-Lite®** Model: _____

WIRE GUARDS

| | |
|-------------|---------------|
| 460.0057-RL | wall mount |
| 460.0048-RL | end mount |
| 460.0058-RL | ceiling mount |

DIMENSIONS

Dimensions are approximate and subject to change.

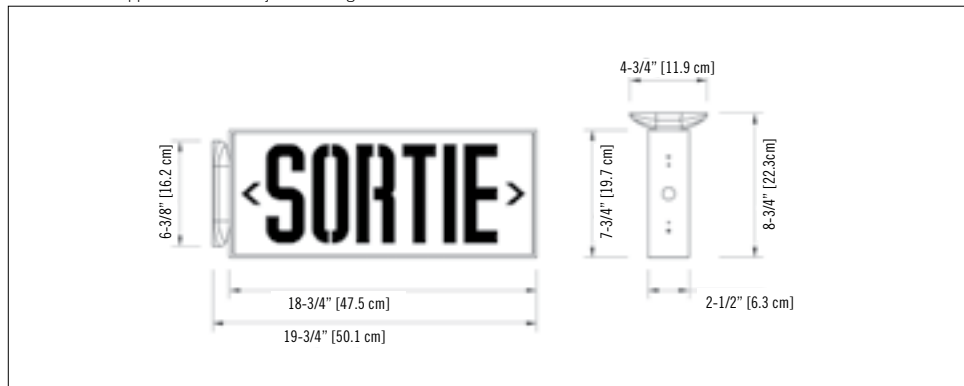

FEATURES

- Durable, extruded, one-piece aluminum housing
- Long life **ALINGAP** technology LED light source is completely enclosed in acrylic module
- Single illumination module lights both single and double face exit signs
- Highly energy efficient, consumes a maximum of 3W
- Normal AC and emergency DC operation – 120V to 347VAC; 6V to 24VDC input
- Also available with power pack; see SM-CS5000 catalogue sheet
- CSA certified, meets or exceeds CSA 22.2 No. 141 requirements
- Comes with **Ready-Lite®** EZ2 canopy, for quick and easy installation

POWER CONSUMPTION

| MODEL | AC SPECS | | DC SPECS | |
|----------------------|----------------|----------------|------------------------|------------------------|
| AC/ standard DC, red | 120 to 347VAC | less than 1.5W | 6 to 24VDC | less than 1.5W |
| AC/ special DC, red | 120/277/347VAC | less than 1.5W | 36 or 48 or 120VDC | less than 3W |
| Self-Powered, red | 120 to 347VAC | less than 3W | nickel-cadmium battery | min. 60 or 120 minutes |

ORDERING INFORMATION

| SERIES | FACES/MOUNTING | COLOUR | VOLTAGE | OPTIONS |
|-----------------------------|--|--|---|---|
| CS = aluminum sortie | 5100 = single face/universal mount 5200 = double face/universal mount | BA = brushed aluminum BK = black PW = polar white TA = textured aluminum WH = factory white | -UL = 120/277/347VAC, 6 to 24VDC -L120-2W = 120VAC, 120VDC 2 wires -LU36 = 120/277/347VAC - 36VDC -LU48 = 120/277/347VAC - 48VDC -LU120 = 120/277/347VAC - 120VDC -ISP = Self-Powered, 120 to 347VAC (60 minutes) -ISP2 = Sself-Powered, 120 to 347VAC (120 minutes) | G = green legend TP = tamper-proof screws* VRTP = vandal resistant shield with tamper-proof screws* CFP = special wording CFP2 = special wording, two LED strips |

***990.0119-RL**= Tamper-proof bit (sold separately)

EXAMPLE: CS5100WH-UL