



RSAU SERIES

Surface-mount architectural battery unit

STANDARD FEATURES

- Easy to install on a ceiling and pendant mount (pendant kit sold separately)
- Thermoplastic decorative housing, white finish or optional black
- High-temperature rated lithium battery with built-in protection circuit module
- Infrared remote control for testing (up to 9.1 m/30')
- Two-wire universal AC input: 120-347VAC 50/60Hz
- Minimum 90 minutes of emergency lighting
- Fixed, optimized light distribution for ceiling heights up to 3.7 m (12')
- Four high-intensity LED with redundant connections; 140 lm/W
- Listed for damp locations: 10° to 40°C (50° to 104°F)
- Certified cUL to CSA 22.2 No. 141
- Warranty details at: www.tnb.ca/en/brands/ready-lite

OPTIONAL FEATURES

- Time delay: 15 minutes
- Self-test and diagnostics
- Nexus®Pro: Bluetooth® central monitoring system
- Fixed, square light distribution for area of rescue, up to 3.7 m (12') ceilings



Remote test control

SUGGESTED SPECIFICATION

Supply and install the **RSAU Series** of surface-mount emergency lighting unit from **Ready-Lite®**. The unit construction shall include a thermoplastic housing and backplate. The optics shall be an impact-resistant polycarbonate lens with fixed light distribution optimized for ceiling heights of 2.4 to 3.7 m (8 to 12'). The housing shall include an isolated compartment for electrical connections, with access through the ceiling back plate.

The emergency lights shall be four high-intensity LED with operational life of minimum 36,000 hours, until 70% of the initial light level (reported L70). The LED lamps shall have redundant interconnections: eventual failure of one lamp shall allow other LED lamps to function. The unit shall have a two-wire universal input rated 120-347VAC 50/60Hz and shall be equipped with a lithium battery. The charger circuit shall provide: AC lock-out, brownout transfer, and battery disconnect at the end of discharge. The charger shall be micro-controller-based and include, if specified, self-test and diagnostic functions; the unit shall self-test for one minute every month, 30 minutes every six months and 90 minutes annually. The pilot light shall be a bi-colour LED and shall change colour from normal green to flashing red when a failure is detected from the battery, charger circuit or lamps. A label located in the unit shall describe the diagnostic for each flashing code. The unit shall be supplied with an infrared remote control to start or cancel a manual test of one minute duration.


The unit shall be listed for damp locations 10° to 40°C (50° to 104°F)

The unit shall be cUL certified to CSA 22.2 No. 141

The equipment shall be **Ready-Lite®** model: _____.

DIMENSIONS

Dimensions are approximate and subject to change.

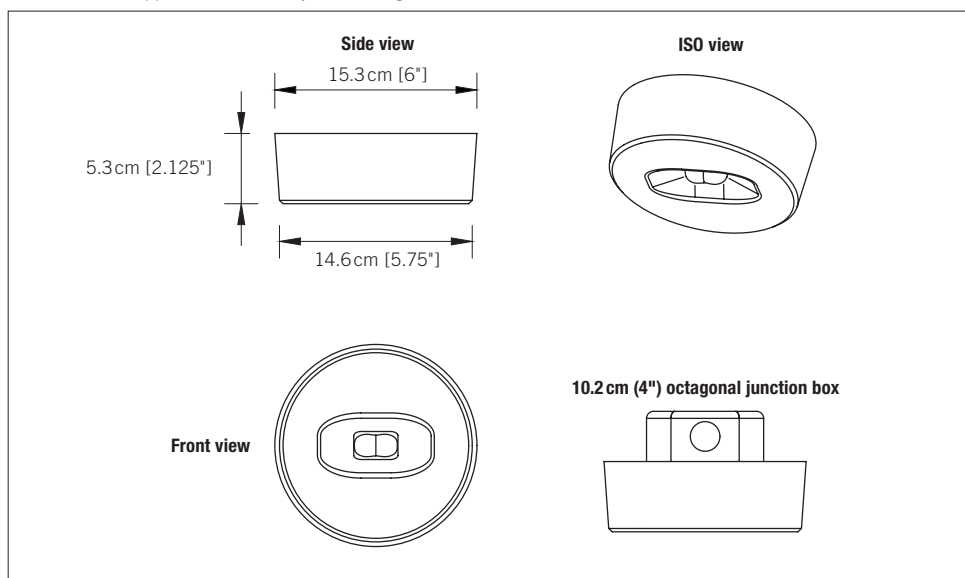


ELECTRICAL RATINGS

V (VAC)	Hz	A	MAX (W)	STAND-BY (W)	P.F.
120	50/60	0.03	2.8	0.5	0.6
277		0.02			0.5
347		0.02			0.45

PHOTOMETRIC PERFORMANCE

Unlike equipment with adjustable lights, the **RSAU Series** makes the installation faster and prevents errors leading to insufficient lighting on the path of egress.

The **RSAU Series** delivers a stable and consistent illumination making it easy to specify in a wide range of applications. The spacing of illumination ranges from 18.9 to 24.4 m (62 to 80 feet) for standard units (corridor). The area-of-rescue option covers a square surface up to 8.2 m x 8.2 m= 67.2 m² (27' x 27'= 729 ft²).

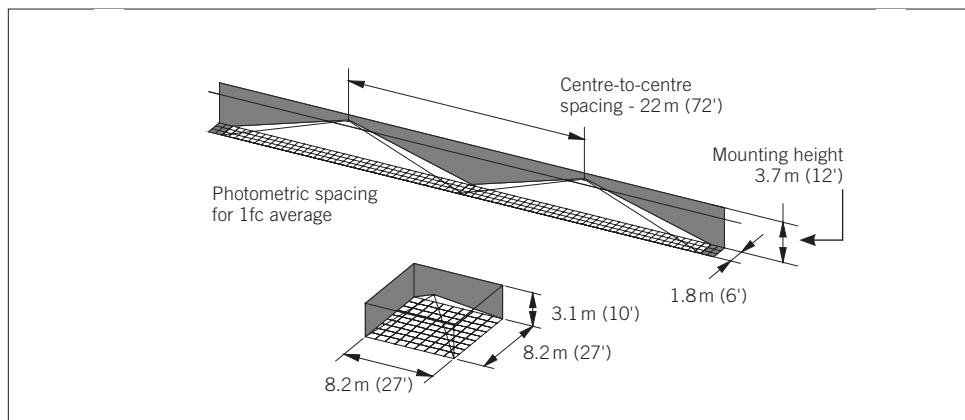

RSAU SERIES

Surface-mount architectural battery unit

SPACING: STANDARD UNIT – 1.83 M [6-FT] WIDE CORRIDOR

MOUNTING HEIGHT	SPACING CENTRE-TO-CENTRE	SINGLE UNIT COVERAGE
2.4 m [8']	18.9 m [62']	17.4 m [57']
2.7 m [9']	20.7 m [68']	18 m [59']
3.1 m [10']	24.4 m [80']	23.5 m [77']
3.7 m [12']	22 m [72']	21 m [69']

ACCESSORIES (ORDER AS A SEPARATE ITEM)

SERIES	PRODUCT CODE
Pendant white Pendant black	P4R*W P4R*B
*Specify pendant lengths in increments of 6" (ex: 6", 12", 24", etc). Other lengths available upon request. Consult your sales representative.	

EXAMPLE: P4R12W

ORDERING INFORMATION

SERIES	COLOUR	UNIT TYPE	OPTIONS
RSAU= self-powered surface architectural unit	WH= factory white BK= black	Blank= standard charger UN= advanced diagnostics, non-audible NEXP= Nexus®Pro wireless Bluetooth®	Blank= corridor lighting pattern SQ= square lighting pattern D3= 15 minute time delay ¹
			¹ Available with corridor or square lighting pattern

EXAMPLE: RSAUWHNEXP