



Accessories

A complete range of accessories for faster and safer integration. The right accessory selection saves installation time, improves access and wiring, and enhances system reliability.

Essentials for your installations

- Distribution blocks and grounding kits
- Mounting accessories
- Window kits
- Locks and handles
- Replacement inner panels
- Ventilation kits and air filters

Accessories

Spare Inner Panels For MC, K

AKP Series

Spare inner panels for all K enclosures

Technical specifications:

- Made from 14 and 12 gauge galvanized steel depending on sizes
- Galvanized natural finish (unpainted)

Cat. No.	Box Size Height x Width	Panel Size Height x Width	Weight lbs.
AKP1612	16 x 12	14 x 10	4
AKP2016	20 x 16	18 x 14	8
AKP2020	20 x 20	18 x 18	10
AKP2420	24 x 20	22 x 18	13
AKP2424	24 x 24	22 x 22	15
AKP3020	30 x 20	28 x 18	16
AKP3024	30 x 24	28 x 22	19
AKP3624	36 x 24	34 x 22	23
AKP3630	36 x 30	34 x 28	29
AKP4224	42 x 24	40 x 22	27
AKP4230	42 x 30	40 x 28	35
AKP4236	42 x 36	40 x 34	42
AKP4836	48 x 36	46 x 34	47

AMCP Series

Spare inner panels for all MC enclosures

Technical specifications:

- Made from 16 and 14 gauge steel
- ANSI/ASA61 grey polyester textured powder coating inside out
- Supplied with on grounding screw

Cat. No.	Box Size Height x Width	Panel Size Height x Width	Weight lbs.
AMCP2713	27 x 13	23 x 9	6
AMCP2020	20 x 20	16 x 16	7
AMCP3020	30 x 20	26 x 16	11
AMCP3030	30 x 30	26 x 26	18
AMCP3636	36 x 36	32 x 32	31
AMCP4848	48 x 48	44 x 44	46

Accessories

Spare Inner Panels For S and R Enclosures

ASP Series

Spare inner panels for all S enclosures

Technical specifications:

- Made from 14 gauge galvanized steel
- Natural finish (unpainted)
- All panels have four mounting holes
- Ground symbols and holes

Cat. No.	Box Size Height x Width	Panel Size Height x Width	Weight lbs.
ASP0604	6 x 4	4.875 x 2.875	0.5
ASP0606	6 x 6	4.875 x 4.875	0.75
ASP0806	8 x 6	6.875 x 4.875	1
ASP0808	8 x 8	6.875 x 6.875	1.25
ASP1008	10 x 8	8.875 x 6.875	1.5
ASP1010	10 x 10	8.875 x 8.875	2
ASP1210	12 x 10	10.875 x 8.875	2.25
ASP1212	12 x 12	10.875 x 10.875	2.75
ASP1412	14 x 12	12.875 x 10.875	3.25
ASP1614	16 x 14	14.875 x 12.875	4.25
ASP2012	20 x 12	18.875 x 10.875	4
ASP2016	20 x 16	18.875 x 14.875	5
ASP2412	24 x 12	22.875 x 10.875	5
ASP2416	24 x 16	22.875 x 14.875	6
ASP2420	24 x 20	22.875 x 18.875	8

ARP Series

Spare inner panels for all R enclosures

Technical specifications:

- Made from 14 and 12 gauge galvanized steel
- Natural finish (unpainted)
- All panels have 4 or 6 or 8 mounting holes all depend of the size
- Ground symbols and holes

Cat. No.	Box Size Height x Width	Panel Size Height x Width	Weight lbs.
ARP1612	16 x 12	13 x 9	3.75
ARP1616	16 x 16	13 x 13	5.25
ARP2012	20 x 12	17 x 9	4.75
ARP2016	20 x 16	17 x 13	6.75
ARP2020	20 X 20	17 x 17	10
ARP2412	24 X 12	21 x 9	6.5
ARP2416	24 X 16	21 x 13	9
ARP2420	24 X 20	21 x 17	12
ARP2424	24 X 24	21 x 21	15
ARP3012	30 X 12	27 x 9	9
ARP3016	30 X 16	27 x 13	12
ARP3020	30 X 20	27 x 17	16
ARP3024	30 X 24	27 x 21	18
ARP3030	30 X 30	27 x 27	24
ARP3624	36 X 24	33 x 21	23
ARP3630	36 X 30	33 x 27	28
ARP3636	36 X 36	33 x 33	34
ARP4224	42 X 24	39 x 21	27
ARP4230	42 X 30	39 x 27	35
ARP4236	42 X 36	39 x 33	42
ARP4824	48 X 24	45 x 21	31
ARP4830	48 X 30	45 x 27	41
ARP4836	48 X 36	45 x 33	49
ARP6036	60 X 36	57 x 33	60
ARP7230	72 X 30	69 x 27	61
ARP7236	72 X 36	69 x 33	74

Accessories

Panels For HD and FRS Enclosures

AHDP Series

Spare inner panels for all HD double door enclosures

Technical specifications:

- Made from 12 gauge
- Galvanized steel unpainted
- Ground symbols and holes. (AHDP7272 will be 12 gauge steel painted white polyester powder coating)

Cat. No.	Box Size Height x Width	Panel Size Height x Width	Weight lbs.
AHDP2442	24 x 42	20 x 38	26
AHDP3042	30 x 42	26 x 38	36
AHDP3648	36 x 48	32 x 44	50
AHDP4848	48 x 48	44 x 44	58
AHDP5442	54 x 42	50 x 38	80
AHDP6048	60 x 48	56 x 44	103
AHDP6060	60 x 60	56 x 56	130
AHDP7260	72 x 60	68 x 56	157
AHDP7272	72 x 72	68 x 68	192

AFF and AFH Series

Spare inner panels for FRS series, single door enclosures

Technical specifications:

- Made from 12 gauge
- Galvanized steel unpainted
- Ground symbols and holes.

Cat. No.	Description	Box Size Height x Width	Panel Size Height x Width	Weight lbs.
AFH6024	half height	60 x 24	24.875x 20	15.6
AFF6024	full height	60 x 24	48 x 20	29.9
AFH7224	half height	72 x 24	30.875x 20	19.3
AFF7224	full height	72 x 24	60 x 20	37.4
AFH9024	half height	90 x 24	39.875x 20	24.9
AFF9024	full height	90 x 24	78 x 20	48.5
AFH7230	half height	72 x 30	30.875x 26	25.0
AFF7230	full height	72 x 30	60 x 26	48.3
AFH6036	half height	60 x 36	24.875x 32	24.8
AFF6036	full height	60 x 36	48 x 32	47.5
AFH7236	half height	72 x 36	30.875x 32	30.7
AFF7236	full height	72 x 36	60 x 32	59.2
AFH9036	half height	90 x 36	39.875x 32	30.7
AFF9036	full height	90 x 36	78 x 32	76.9

AFFSP Series

Side mounted panels for FRS series, single door enclosures


Technical specifications:

- Made from 12 gauge
- Galvanized steel unpainted
- Ground symbols and holes
- Flat construction.

Cat. No.	Box Size Height x Width	Panel Size Height x Width	Weight lbs.
AFFSP6024	60 x 24	48 x 14	21
AFFSP6036	60 x 36	48 x 26	38
AFFSP7224	72 x 24	60 x 14	26
AFFSP7230	72 x 30	60 x 20	36
AFFSP7236	72 x 36	60 x 26	47
AFFSP9024	90 x 24	78 x 14	33
AFFSP9036	90 x 36	78 x 26	61

Accessories

AWK SERIES Window kits

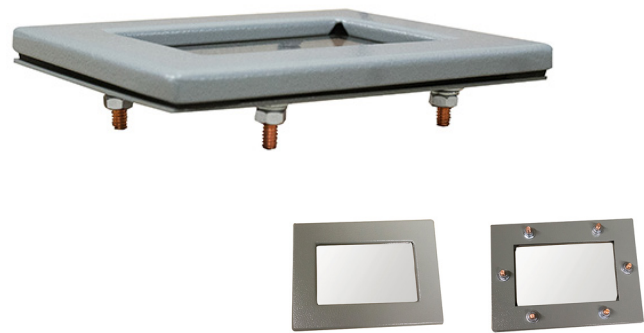


Technical specifications:

- Frame made with heavy gauge steel
- 1/4” thick clear polycarbonate (lexan)
- Shipped complete with all mounting hardware
- Water-tight gasket
- Recommended cut-out size (A+1-5/8) x (B+1-5/8)
- Be sure to allow space for door handles, door stiffeners, print pockets or other items attached to the door when determining if a window kit fit in a door
- Custom sizes, materials and finishes available upon request
- ANSI/ASA61 grey polyester textured coating over a phosphatized base
- Stainless steel on request (Ex. AWK..SS)


Cat. No.	A	B	Frame (A+1-5/8) x (B+1-5/8)	Weight lbs.
AWK53	5	3	7.5	1.4
AWK95	9	5	11.5	2.8
AWK1010	10	10	12.5	6.3
AWK1212	12	12	14.5	7.5
AWK133	13	3	15.5	3.3
AWK138	13	8	15.5	4.3
AWK175	17	5	19.5	4.9
AWK1711	17	11	19.5	6.4
AWK2315	23	15	25.5	9.2
AWK2919	29	19	31.5	13.3
AWK3523	35	23	37.5	17.1

Diagrams

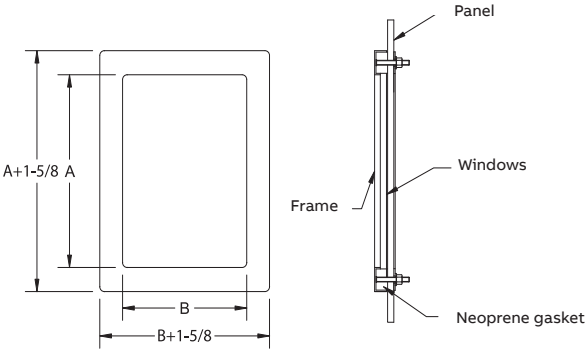

Accessories

AMF Series Mounting feet kits (pair)

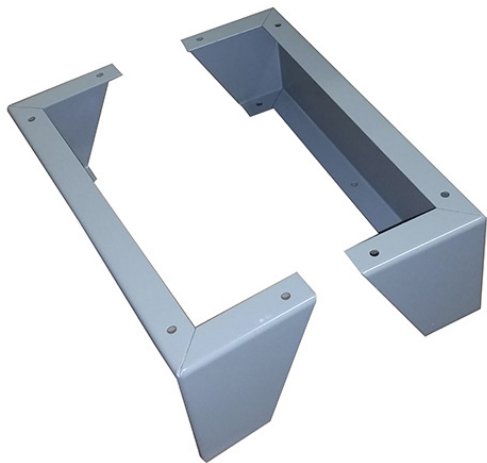

Technical specifications:


- Made with heavy gauge steel
- ANSI/ASA61 grey polyester textured coating
- Suitable for R and HD enclosures
- Shipped complete with two (2) mounting feet and bolts for field installation
- Other sizes on request

How to order:

- height of feet requires = 12", depth of enclosure - 6", mounting feet cat. no. is then AMF 1206

Depth "B"					Mounting Feet Height "A"					
	Cat. No.	6" Weight	Cat. No.	12" Weight	Cat. No.	15" Weight	Cat. No.	18" Weight	Cat. No.	24" Weight
6	AMF0606	7.3	AMF1206	12.6	AMF1506	15.2	AMF1806	17.9	AMF2406	23.1
8	AMF0608	8.4	AMF1208	14.4	AMF1508	17.4	AMF1808	20.3	AMF2408	26.3
10	AMF0610	9.4	AMF1210	16.1	AMF1510	19.5	AMF1810	22.8	AMF2410	29.5
12	AMF0612	10.4	AMF1212	17.9	AMF1512	21.6	AMF1812	25.3	AMF2412	32.7
16	AMF0616	12.5	AMF1216	21.4	AMF1516	25.8	AMF1816	30.3	AMF2416	39.1
20	AMF0620	14.6	AMF1220	24.9	AMF1520	30.1	AMF1820	35.2	AMF2420	45.5
24	AMF0624	16.7	AMF1224	28.4	AMF1524	34.3	AMF1824	40.2	AMF2424	51.9

Diagrams

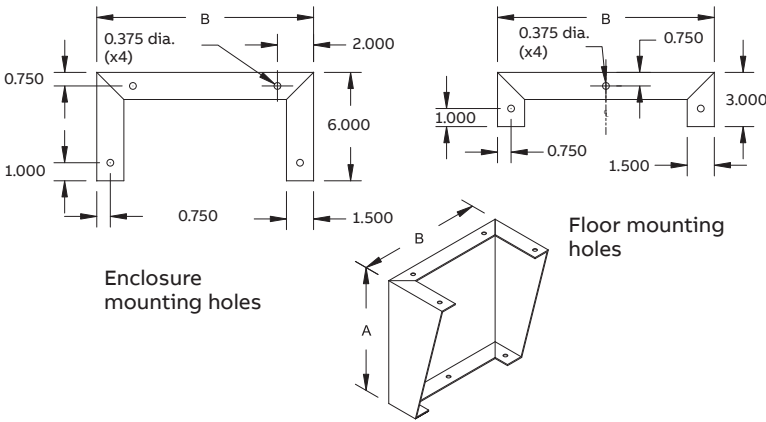

Accessories

Special Handles

Quarter turn standard cut out, for A11KK, A16Ks, A12KTC, A15KR and A15KRK

Cat. no. A11KK

Flush Lock Kits 1/4 Turn Latch

- Used on K Series
- High quality black zinc plated
- Supply with latch and clip for easy field installation
- Rated NEMA 1



Cat. no. A16KS/A16KS-SS

Flush Lock Kits 1/4 Turn Latch

- Used on S Series
- High quality black zinc plated for A16KS and stainless steel for A16KS-SS
- Supplied with latch gasket, nut and O-ring gasket for field installation
- Rated NEMA 12-4



Cat. no. A16KSK

Flush Key Lock Kit

- Used for S Series
- High quality black zinc plated
- Supply with latch gasket, nut and O-ring gasket for field installation
- Rated NEMA 12-3R



Cat. no. A12KTC

Flush Key Lock Kit 1/4 Turn Latch

- Used on TCS, TCF, EUKO and K Series
- High quality black zinc plated
- Supplied with latch and clip for easy field installation
- General purpose application only
- Rated NEMA 1



Accessories

Special Handles

Quarter turn standard cut out, for A11KK, A16Ks, A12KTC, A15KR and A15KRK

Cat. no. A14K

Toggle Pull Latch

- Made from steel, zinc plated
- Provides a provision from padlock
- To be mounted externally, suitable for oil-tight enclosures
- Rated NEMA 12-4



Cat. no. A15KR/A15KR-SS

Flush Lock Kit 1/4 Turn Latch

- Used on R Series
- High quality black zinc plated for A15KR and stainless steel for A15KR-SS
- Supplied with latch gasket, nut and O-ring gasket for field installation
- Rated NEMA 12-4



Cat. no. A15KRK

Flush Key Lock Kit

- Used on R Series
- High quality black zinc plated
- Rated NEMA 12-3R



Accessories

Three-Point Lock - Automotive Type Handles

Cat. no. A8K

Padlocking Vault Handle Kit

- 6" long cadmium plated handle
- 3.25" long shaft
- Shipped complete with latch, nuts and bolts for field installation
- May be used for oil-tight or weather-proof applications; not suitable for water-tight applications
- Can be factory installed; specify suffix "F" (Ex. A8F)
- Rated NEMA 12-3R



Cat. no A10K

Automotive Locking Handle Kit

- 3.75" long chrome plated handle and flange
- 3" long latch shaft
- One single type of key
- May be used for oil-tight or weather-proof applications; not suitable for water-tight applications
- Supplied with latch and screws for field installation
- Can be factory installed; specify suffix "F" instead of "K" (Ex. A10F)
- Rated NEMA 12-3R



Cat. no A10K3 – A8K3

Automotive Three Point Lock Kit

- Same type handle and A10K - A8K, plus top and bottom nylon rollers latch bars
- Shipped complete with all necessary hardware for field installation
- Enclosure catalog no. must be specified when ordering A10K3 or A8K3 handle
- May be used for oil-tight or weather-proof applications not suitable for water-tight applications
- Can be factory installed; specify "F" instead of "K" (Ex. A10F3 or A8F3)
- Rated NEMA 12-3R



Cat. no AMK – AMK3

Enclosure flush handle

- Single or 3 points lock
- Designed for type 4-12 enclosures
- Complete with key and padlock rings.
- Two keys provided
- Finish textured black
- Rated NEMA 4-12



Accessories

Three-Point Lock - Automotive Type Handles

Cat. no. AHD108K

Heavy duty latch

- Single point lock
- Rated NEMA 4-12
- Padlocking handle



Cat. no. AHD108K3

Heavy duty latch

- Three points lock
- Rated NEMA 4-12
- Padlocking handle



Cat. no. AHD110K

Heavy duty latch

- Single point lock
- Two keys provided
- Rated NEMA 4-12
- Keyed handle
- C/W padlocking hasp



Cat. no. AHD110K3

Heavy duty latch

- Three points lock
- Two keys provided
- Rated NEMA 4-12
- Keyed handle
- C/W padlocking hasp



Accessories

Mounting Hardware

Cat. no. AMFRS / AMFRSS

External Mounting Feet

- Made from galvanized steel, for AMFRS
- Made from stainless #304 for AMFRSS
- To be mounted externally; suitable for water- / oil-tight enclosures
- Standard with every “R” enclosure
- Supplied with all necessary hardware for field installation



Cat. no. APRS / APRSS

Provision for Padlocks

- Made from galvanized steel for APRS
- Made from stainless steel #304 for APRSS
- Provides a provision for padlocks
- Standard with every “R” and “AMC” enclosure
- To be mounted externally; suitable for water- / oil-tight enclosures
- Supplied with all necessary hardware for field installation



Cat. no. AGPSRK

Padlock adapter


- Padlock adapter fits directly over the slotted quarter turn preventing access.
- 2mm thick 14 gauge stainless steel.
- Stainless steel mounting hardware provided.
- Once installed, the bolts cannot be removed without the door open.
- Easy installed in the field.
- Maintains UL/CSA Type 4 rating



Cat. no. AMR

Galvanized mounting rails unpainted

- Galvanized mounting rails unpainted, for R, HD and FRS series
- Perforated and slotted, for easy wiring installation.
- AMR-R, AMR-HD or AMR-FRS enclosures, add H for horizontal or V for vertical mounting rail. (AMR-RH or AMR -RV)
- Call factory for sizes and prices.

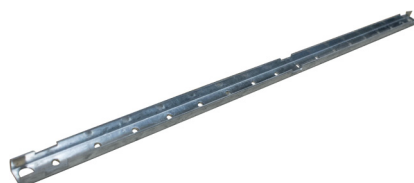

Accessories

Mounting Hardware

Cat. no. ALEK

Lifting Eyes Kits (Pair)

- 1/2 - 13 lifting eyes used on BEL large enclosures
- Sold by pair complete with flat seal washers and nuts
- Lifting capacity approximately 2500 lb each
- Can be factory installed (specify “F” instead of “K”; Ex. ALEF)



Cat. no. AHR / AHR-SS

Hinges for R Series

- Used for R Series
- Made of steel, zinc plated for AHR
- Made from stainless steel #304 for AHR-SS



Cat. no. APG / APW

Spray Paint

- Gray paint “APG” (spray can)
- White paint “APW” (spray can)

Cat. no. ASIL

Silicone

- Silicone provided for EEMAC requirement
- Standard with ADSR-ADSHD

Accessories



ASPK Series - Swing Out Panel Kits For R Enclosures



Caractéristiques :

- Used to allow installation of components near the front of the enclosure.
- All kits are supplied with the necessary hardware and instructions.
- Outside screws are stainless steel.
- Designed to be used in the R.RAL and RSS single door enclosure series.
- White polyester coated over phosphatized surfaces.
- Can be factory installed (specify "F" instead of "K"; Ex. ASPF1620).

Diagrams

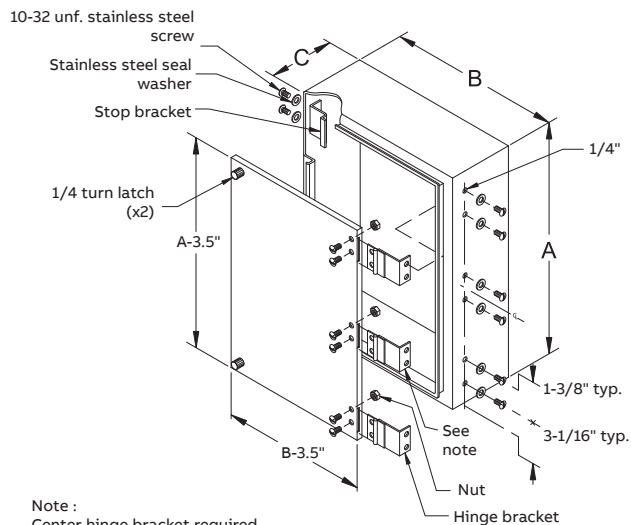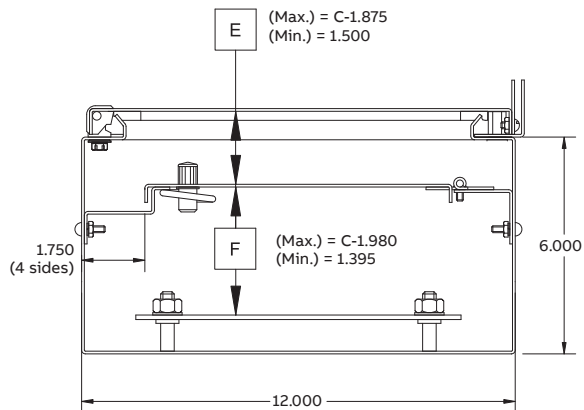

Cat. No.	Box Size Height x Width	Panel Size Height x Width	Weight lbs.
ASPK1224	12 x 24	8.5 x 20.5	5.5
ASPK1616	16 x 16	12.5 x 12.5	4.5
ASPK1620	16 x 20	12.5 x 16.5	6.25
ASPK2016	20 x 16	16.5 x 12.5	6.25
ASPK2020	20 x 20	16.5 x 16.5	7.75
ASPK2024	20 x 24	16.5 x 20.5	9.25
ASPK2412	24 x 12	20.5 x 8.5	5.5
ASPK2416	24 x 16	20.5 x 12.5	7.25
ASPK2420	24 x 20	20.5 x 16.5	9.25
ASPK2424	24 x 24	20.5 x 20.5	11
ASPK2430	24 x 30	20.5 x 26.5	14
ASPK3020	30 x 20	26.5 x 16.5	10.5
ASPK3024	30 x 24	26.5 x 20.5	14
ASPK3030	30 x 30	26.5 x 26.5	18
ASPK3036	30 x 36	26.5 x 32.5	21.5
ASPK3624	36 x 24	32.5 x 20.5	17.25
ASPK3630	36 x 30	32.5 x 26.5	21.5
ASPK3636	36 x 36	32.5 x 32.5	26
ASPK4224	42 x 24	30.5 x 20.5	20
ASPK4230	42 x 30	38.5 x 26.5	25
ASPK4236	42 x 36	38.5 x 32.5	30.25
ASPK4824	48 x 24	44.5 x 20.5	23.5
ASPK4830	48 x 30	44.5 x 26.5	29.5
ASPK4836	48 x 36	44.5 x 32.5	35
ASPK6036	60 x 36	56.5 x 32.5	44
ASPK7230	72 x 30	68.5 x 26.5	52.75
ASPK7236	72 x 36	68.5 x 32.5	55

Accessories

Drip Shield Kits

Technical specifications:

- Designed for use on our standard R and HD enclosure series (EEMAC/NEMA 12-3R)
- Each kit includes drip shield, silicone stainless steel 10/32 screws and plated nuts
- ANSI/ASA61 grey polyester textured powder coating applied over phosphatized surfaces
- Can be factory installed (specify “F” after catalog number; Ex. ADSRF12, ADSHDF42)


Single door, “R” Series

Cat. No.	Width box
ADSR12	12
ADSR16	16
ADSR20	20
ADSR24	24
ADSR30	30
ADSR36	36


Double door enclosures, “R” and “HDM” Series

Cat. No.	Width box
ADSHD42	42
ADSHD48	48
ADSHD60	60
ADSHD72	72


Diagrams

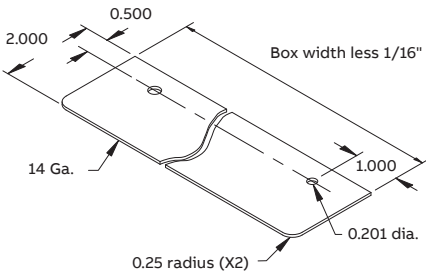


ADSR Series



ADSHD Series

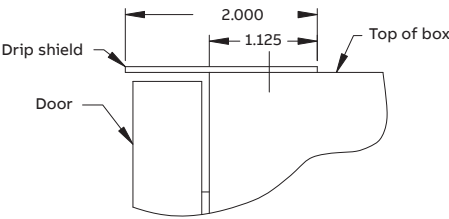

ADSR Series assembly

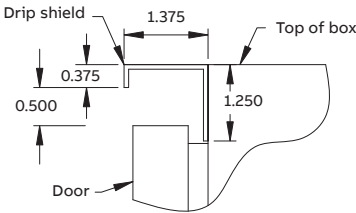

ADSHD Series assembly

Accessories

Ventilating plates, air filter kits

Technical specifications:

- Made from 14 gauge steel
- Supplied with all necessary nuts and bolts
- Designed to provide ventilation to panel mounted instruments and controls
- Special sizes available on request
- Air filter can be supplied in form of a kit, consisting of a perforated steel frame, and a fiber filtering media. Factory installed on request only (specify “F” instead of “K”; Ex. AFLF4)
- ANSI / ASA61 grey polyester textured coating over a phosphatized base.


How to order

- Ventilating plates and air filter assembly must be ordered separately.



Cat. No.	A x B	No. of louvers	Lnht. of louvers	Opening area (in²)	Cat. No. Air filter kit
AVP4	4.875 X 4.875	4	3.5	1.6	AFLK4
AVP8	5.5 X 10.5	8	3.5	3.2	AFLK8
AVP12	5.5 X 15.5	12	3.5	4.8	AFLK12

Diagram

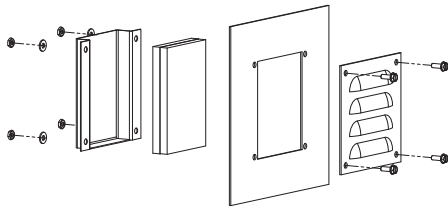

Grounding Kits

- Technical specifications:
- Grounding kits are supplied with all necessary mounting hardware
 - All connectors are CU-AL approved
 - Can be factory installed (specify “F” after cat. No.; Ex. TGR200F)



GK



GRBG



BGR200



BGR400



BRG600



TGR200



TGR400



TGR600



Cat. No.	Application	No. of circuits and wire sizes
TGR200	Splitter trough	7 x (2-14 Cu-Al)
TGR400	Splitter trough	7 x (2-14 Cu-Al) et 1 x (1/0-14 Cu-Al)
TGR600	Splitter trough	7 x (2-14 Cu-Al) et 1 x (300KCM - 6 Cu-AL)
BGR200	Splitter box	4 x (2-14 Cu-Al)
BGR400	Splitter box	4 x (2-14 Cu-Al) et 1 x (1/0-14 Cu-Al)
BGR600	Splitter box	4 x (2-14 Cu-Al) et 1 x (300KCM - 6 Cu-Al)
GRBG	Bus gutters	Connectors to be ordered seperatly; room for 5 lugs (threaded holes 1/4-20 into 1/4 x 1" aluminum busbar
GK	Junction / Pull box	3 x (4-14 Cu-Al)

Polyester Insulators



6375-S10



1100-A1



3213-S6



5350-A6

Fiberglass Reinforced Polyester Insulators

Technical specifications:

- Red color
- Aluminum insert
- Specific voltage rating available on request



Cat. No.	Height (in.)	Diam. (in.)	Rated voltage (CA)	Thread size	Tensile strenght	Cantilever strenght	Compression strenght	Weight lbs.
1100-A1	1.000	1.125	600	1/4-20 x 1/4 deep	600	300	6000	0.055
3213-S6	2.125	2.500	2500	1/2-13 x 5/8 deep	3000	3500	50000	0.620
5350-A6	3.500	2.500	5000	1/2-13 x 5/8 deep	5700	3200	27000	0.720
6375-S10	6.000	2.750	15000	3/8-16 x 3/4 deep	3000	3200	30000	2.040