
Cable sleeves and spiral wraps

Cable protection systems

The Cable Protection Systems (CPS) captures different products:

Wrap-around woven sleeving, braided sleeving, spiral wrap & extruded grommeting.

The wrap-around sleeving – better known under the name Bind-It – is a tough but lightweight sleeve used to bundle and protect wires and cables from abrasion, sharp edges and chafing. Bind-It is a selfwrapping sleeve that is very quick and easy to install and remove. Bind-It is also available in a flame retardant version. No heat is necessary to seal the ends of this product. The ends can be secured by using Ty-Rap cable ties.

The braided sleeving is used for bundling and protecting cables. The braided sleeving is a closed sleeve available in a flame and a non-flame retardant version. This product is mainly used inside cabinets and enclosures. To stop the end of the sleeving fraying it is necessary to heat seal the ends using a “hotwire” device.

Spiral wrap is mainly used for protection of bundles. This product is available in a natural and UV-resistant version and supplied in a Euroslot bag, ideal for the distribution market.

Finally the extruded grommeting of ABB is used to line panel edges and knock-outs where the chafing of passing wires is a concern. In most applications, grommeting will grip tightly by itself



Wire protection products

Spiral Wrap



Characteristics

- Install with gaps for greater flexibility or butted together for maximum abrasion resistance, insulation and rigidity
- Packaged in 100 foot reels
- Protects bundles from 0.063 in. to 7 in. (1.6 mm to 177.8 mm) diameters
- Also commonly known as reverse cut, left-handed cut or counter-clockwise cuted

Technical information

- Material: Natural polyethylene or Weatherable black polyethylene
- For general indoor use to 50°C (122°F).
- Material is flexible and easy to work with

Spiral wrap

Cat. n°.	Colour	Outside diameter		Pitch		Nominal wall thickness		Bundle range		Reel Qty.
		[mm]	[in.]	[mm]	[in.]	[mm]	[in.]	[mm]	[in.]	
SRPE-125-9-C	Natural	3.2	0.13	5.3	0.21	0.9	0.35	1.6 - 12.7	0.06 - 0.50	1 (100 ft.)
SRPE-187-9-C	Natural	4.8	0.19	6.1	0.24	1.0	0.04	3.2 - 38.1	0.13 - 1.50	1 (100 ft.)
SRPE-250-9-C	Natural	6.4	0.25	9.5	0.38	1.1	0.05	4.8 - 50.8	0.19 - 2.00	1 (100 ft.)
SRPE-375-9-C	Natural	9.5	0.38	11.1	0.44	1.3	0.05	8.0 - 76.2	0.31 - 3.00	1 (100 ft.)
SRPE-500-9-C	Natural	12.7	0.50	14.3	0.56	1.6	0.06	9.5 - 101.6	0.38 - 4.00	1 (100 ft.)
SRPE-625-9-C	Natural	15.9	0.63	15.9	0.63	1.6	0.06	15.9 - 114.3	0.63 - 4.50	1 (100 ft.)
SRPE-750-9-C	Natural	15.9	0.75	19.1	0.75	1.7	0.07	19.1 - 127.0	0.75 - 5.00	1 (100 ft.)
SRPE-1000-9-C	Natural	25.4	1.00	28.2	1.11	1.8	0.07	25.4 - 177.8	1.00 - 7.00	1 (100 ft.)
SRPE-125-0-C	Black	3.2	0.13	5.3	0.21	0.9	0.35	1.6 - 12.7	0.06 - 0.50	1 (100 ft.)
SRPE-187-0-C	Black	4.8	0.19	6.1	0.24	1.0	0.04	3.2 - 38.1	0.13 - 1.50	1 (100 ft.)
SRPE-250-0-C	Black	6.4	0.25	9.5	0.38	1.1	0.05	4.8 - 50.8	0.19 - 2.00	1 (100 ft.)
SRPE-375-0-C	Black	9.5	0.38	11.1	0.44	1.3	0.05	8.0 - 76.2	0.31 - 3.00	1 (100 ft.)
SRPE-500-0-C	Black	12.7	0.50	14.3	0.56	1.6	0.06	9.5 - 101.6	0.38 - 4.00	1 (100 ft.)
SRPE-625-0-C	Black	15.9	0.63	15.9	0.63	1.6	0.06	15.9 - 114.3	0.63 - 4.50	1 (100 ft.)
SRPE-750-0-C	Black	15.9	0.75	19.1	0.75	1.7	0.07	19.1 - 127.0	0.75 - 5.00	1 (100 ft.)
SRPE-1000-0-C	Black	25.4	1.00	28.2	1.11	1.8	0.07	25.4 - 177.8	1.00 - 7.00	1 (100 ft.)


Tooling



CC120B

Cutting tool for all your spiral wrap, plastic pipe and PVC conduit needs up to 1¼ in. I.D. See page C131

Diagrams

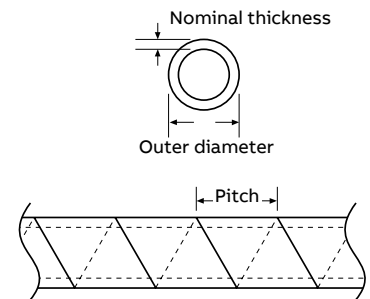

Wire protection products

Spiral wrap



Characteristics

- Install with gaps for greater flexibility or butted together for maximum abrasion resistance, insulation and rigidity
- Packaged in 100 foot reels
- Protects bundles from 0.063 in. to 7 in. (1.6 mm to 177.8 mm) diameters
- Also commonly known as reverse cut, left-handed cut or counter-clockwise cut

Technical information

- Material: Natural polyethylene, Weatherable black polyethylene or White flame-retardant polyethylene
- For general indoor use to 50°C (122°F).
- Flammability rating flame-retardant polyethylene: UL 94 V-0
- Material is flexible and easy to work with

Spiral wrap

Cat. n°.	Colour	Outside diameter		Pitch	Nominal wall thickness		Bundle range		Reel Qty.	
		[mm]	[in.]		[mm]	[in.]	[mm]	[in.]		
SRPE-125F-9-C	Natural	4.8	0.19	6.1	0.24	1.0	0.04	1.6 - 12.7	0.06 - 0.50	1 (100 pi)
SRPE-187F-9-C	Natural	4.8	0.19	6.1	0.24	1.0	0.04	3.2 - 38.1	0.13 - 1.50	1 (100 pi)
SRPE-250F-9-C	Natural	6.4	0.25	9.5	0.38	1.1	0.05	4.8 - 50.8	0.19 - 2.00	1 (100 pi)
SRPE-375F-9-C	Natural	9.5	0.38	11.1	0.44	1.3	0.05	8.0 - 76.2	0.31 - 3.00	1 (100 pi)
SRPE-500F-9-C	Natural	12.7	0.50	14.3	0.56	1.6	0.06	9.5 - 101.6	0.38 - 4.00	1 (100 pi)
SRPE-625F-9-C	Natural	15.9	0.63	15.9	0.63	1.6	0.06	15.9 - 114.3	0.63 - 4.50	1 (100 pi)
SRPE-750F-9-C	Natural	15.9	0.75	19.1	0.75	1.7	0.07	19.1 - 127.0	0.75 - 5.00	1 (100 pi)
SRPE-1000F-9-C	Natural	25.4	1.00	28.2	1.11	1.8	0.07	25.4 - 177.8	1.00 - 7.00	1 (100 pi)
SRPE-125F-0-C	Black	4.8	0.19	6.1	0.24	1.0	0.04	1.6 - 12.7	0.06 - 0.50	1 (100 pi)
SRPE-187F-0-C	Black	4.8	0.19	6.1	0.24	1.0	0.04	3.2 - 38.1	0.13 - 1.50	1 (100 pi)
SRPE-250F-0-C	Black	6.4	0.25	9.5	0.38	1.1	0.05	4.8 - 50.8	0.19 - 2.00	1 (100 pi)
SRPE-375F-0-C	Black	9.5	0.38	11.1	0.44	1.3	0.05	8.0 - 76.2	0.31 - 3.00	1 (100 pi)
SRPE-500F-0-C	Black	12.7	0.50	14.3	0.56	1.6	0.06	9.5 - 101.6	0.38 - 4.00	1 (100 pi)
SRPE-625F-0-C	Black	15.9	0.63	15.9	0.63	1.6	0.06	15.9 - 114.3	0.63 - 4.50	1 (100 pi)
SRPE-750F-0-C	Black	15.9	0.75	19.1	0.75	1.7	0.07	19.1 - 127.0	0.75 - 5.00	1 (100 pi)
SRPE-1000F-0-C	Black	25.4	1.00	28.2	1.11	1.8	0.07	25.4 - 177.8	1.00 - 7.00	1 (100 pi)
SRFR-187F-WH-C	White	4.8	0.19	6.1	0.24	1.0	0.04	3.2 - 38.1	0.13 - 1.50	1 (100 pi)
SRFR-250F-WH-C	White	6.4	0.25	9.5	0.38	1.1	0.05	4.8 - 50.8	0.19 - 2.00	1 (100 pi)
SRFR-375F-WH-C	White	9.5	0.38	11.1	0.44	1.3	0.05	8.0 - 76.2	0.31 - 3.00	1 (100 pi)
SRFR-500F-WH-C	White	12.7	0.50	14.3	0.56	1.6	0.06	9.5 - 101.6	0.38 - 4.00	1 (100 pi)


Tooling



CC120B

Cutting tool for all your spiral wrap, plastic pipe and PVC conduit needs up to 1¼ in. I.D.
See page C131

Diagrams

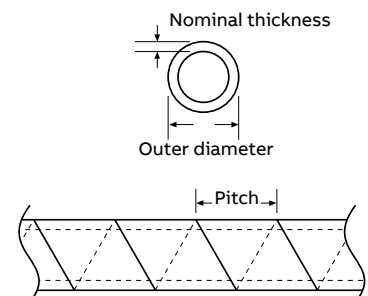

Wire protection products

Extruded grommeting



Characteristics

- Used to line panel edges and knockouts where the chafing of passing wires is a concern
- Available in 8 stock sizes in 100-ft. lengths for panels from 0.04 in. (1.02 mm) to 0.25 in. (6.35 mm) thick
- In most applications, grommeting will grip tightly by itself, if not, a touch of Epoxy will keep it in place

Technical information

- Material: Polyamide 6.6
- Temperature range: -40°C to +85°C (-40°F to +185°F)
- Colour: Natural or Black
- Flammability rating: UL 94 V-2
- Halogen free, Silicone free

Extruded grommeting

Cat. n°.	Colour	ANSI UL94 Flame rating	Internal width A		Grommeting thickness C		Grommeting height D		Grommeting width B		Reel Qty. [pi]	
			[mm]	[in.]	[mm]	[in.]	[mm]	[in.]	[mm]	[in.]		[m]
GRNY-040-9-C	Natural	V-2	1.0	0.04	1.0	0.04	4.8	0.19	3.2	0.13	30.5	100
GRNY-052-9-C	Natural	V-2	1.3	0.05	1.0	0.04	4.8	0.19	3.2	0.13	30.5	100
GRNY-062-9-C	Natural	V-2	1.6	0.06	1.3	0.04	5.1	0.20	4.3	0.17	30.5	100
GRNY-085-9-C	Natural	V-2	2.2	0.08	1.3	0.04	5.1	0.20	4.3	0.17	30.5	100
GRNY-100-9-C	Natural	V-2	2.5	0.10	1.3	0.04	5.9	0.22	5.3	0.21	30.5	100
GRNY-125-9-C	Natural	V-2	3.8	0.13	1.3	0.05	5.9	0.22	5.2	0.20	30.5	100
GRNY-187-9-C	Natural	V-2	4.7	0.19	1.3	0.05	6.9	0.27	7.0	0.28	30.5	100
GRNY-250-9-C	Natural	V-2	6.4	0.25	1.3	0.05	7.1	0.28	9.4	0.37	30.5	100
GRNY-040-0-C	Black	V-2	1.0	0.04	1.0	0.04	4.8	0.19	3.2	0.13	30.5	100
GRNY-052-0-C	Black	V-2	1.3	0.05	1.0	0.04	4.8	0.19	3.2	0.13	30.5	100
GRNY-062-0-C	Black	V-2	1.6	0.06	1.3	0.04	5.1	0.20	4.3	0.17	30.5	100
GRNY-085-0-C	Black	V-2	2.2	0.08	1.3	0.04	5.1	0.20	4.3	0.17	30.5	100
GRNY-100-0-C	Black	V-2	2.5	0.10	1.3	0.04	5.9	0.22	5.3	0.21	30.5	100
GRNY-125-0-C	Black	V-2	3.8	0.13	1.3	0.05	5.9	0.22	5.2	0.20	30.5	100
GRNY-187-0-C	Black	V-2	4.7	0.19	1.3	0.05	6.9	0.27	7.0	0.28	30.5	100
GRNY-250-0-C	Black	V-2	6.4	0.25	1.3	0.05	7.1	0.28	9.4	0.37	30.5	100


Tooling



CC120B

Cutting tool for all your spiral wrap, plastic pipe and PVC conduit needs up to 1½ in. I.D. See page C131

Diagram



Wire protection products

Extruded grommeting



Characteristics

- Used to line panel edges and knockouts where the chafing of passing wires is a concern
- Available in 8 stock sizes in 100-ft. lengths for panels from 0.04 in. (1.02 mm) to 0.25 in. (6.35 mm) thick
- In most applications, grommeting will grip tightly by itself, if not, a touch of Epoxy will keep it in place

Technical information

- Material: Polyethylene
- Temperature range: -40°C to +85°C (-40°F to +185°F)
- Halogen free, silicone free

Extruded grommeting

Cat. n°.	Colour	ANSI UL94 Flame rating	Max. panel thickness A		Grommeting thickness C		Grommeting height D		Grommeting width B		Reel Qty.	
			[mm]	[in.]	[mm]	[in.]	[mm]	[in.]	[mm]	[in.]	[m]	[ft.]
GRPE-040-9-C	Natural	HB	1.0	0.04	1.0	0.04	4.8	0.19	3.2	0.13	30.5	100
GRPE-052-9-C	Natural	HB	1.3	0.05	1.0	0.04	4.8	0.19	3.2	0.13	30.5	100
GRPE-062-9-C	Natural	HB	1.6	0.06	1.3	0.05	5.1	0.20	4.3	0.17	30.5	100
GRPE-085-9-C	Natural	HB	2.1	0.09	1.3	0.05	5.1	0.20	4.3	0.17	30.5	100
GRPE-100-9-C	Natural	HB	2.5	0.10	1.3	0.05	5.9	0.22	5.3	0.21	30.5	100
GRPE-125-9-C	Natural	HB	3.2	0.13	1.3	0.05	5.9	0.22	5.2	0.20	30.5	100
GRPE-187-9-C	Natural	HB	4.7	0.19	1.3	0.05	6.9	0.27	7.0	0.28	30.5	100
GRPE-250-9-C	Natural	HB	6.4	0.25	1.3	0.05	7.1	0.28	9.4	0.37	30.5	100
GRUPE-040-0-C	Natural uncut	HB	1.0	0.04	1.0	0.04	4.8	0.19	3.2	0.13	30.5	100
GRUPE-052-0-C	Natural uncut	HB	1.3	0.05	1.0	0.04	4.8	0.19	3.2	0.13	30.5	100
GRUPE-062-0-C	Natural uncut	HB	1.6	0.06	1.3	0.05	5.1	0.20	4.3	0.17	30.5	100
GRUPE-085-0-C	Natural uncut	HB	2.2	0.09	1.3	0.05	5.1	0.20	4.3	0.17	30.5	100
GRUPE-100-0-C	Natural uncut	HB	2.5	0.10	1.3	0.05	5.9	0.22	5.3	0.21	30.5	100
GRUPE-125-0-C	Natural uncut	HB	3.2	0.13	1.3	0.05	5.9	0.22	5.2	0.20	30.5	100
GRUPE-187-0-C	Natural uncut	HB	4.7	0.19	1.3	0.05	6.9	0.27	7.0	0.28	30.5	100
GRUPE-250-0-C	Natural uncut	HB	6.4	0.25	1.3	0.05	7.1	0.28	9.4	0.37	30.5	100
GRFR-040-WH-C	Flame-retardant white	V-0	1.0	0.04	1.0	0.04	4.8	0.19	3.1	0.13	30.5	100
GRFR-052-WH-C	Flame-retardant white	V-0	1.3	0.05	1.0	0.04	4.8	0.19	3.1	0.13	30.5	100
GRFR-062-WH-C	Flame-retardant white	V-0	1.6	0.06	1.3	0.05	5.1	0.20	4.2	0.17	30.5	100
GRFR-085-WH-C	Flame-retardant white	V-0	2.2	0.09	1.3	0.05	5.1	0.20	4.2	0.17	30.5	100
GRFR-125-WH-C	Flame-retardant white	V-0	3.2	0.13	1.3	0.05	5.9	0.22	5.2	0.20	30.5	100
GRFR-187-WH-C	Flame-retardant white	V-0	4.7	0.19	1.3	0.05	6.9	0.27	7.0	0.28	30.5	100
GRFR-250-WH-C	Flame-retardant white	V-0	6.4	0.25	1.3	0.05	7.1	0.28	9.4	0.37	30.5	100


Tooling



CC120B


Cutting tool for all your spiral wrap, plastic pipe and PVC conduit needs up to 1¼ in. I.D. See page C131

Diagram



Wire protection products

Braided sleeving

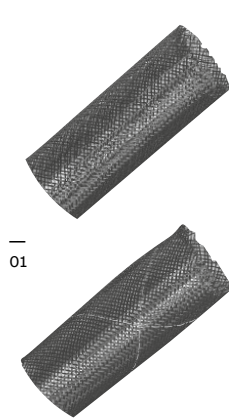

01

02

01 Polyethylene Terephthalate (P.E.T.)

02 F – Flame Retardant Polyethylene Terephthalate (P.E.T.)

Characteristics

The ABB braided wire protection sleeving is used to bundle and protect wires and cables from abrasion and excessive wear. Its flexible, lightweight, open weave construction installs easily over a variety of bundle diameters and shapes. The sleeving is resistant to chemicals, fungus, fuels, UV sunlight, and has an indefinite shelf life. It's easily cut with a hot knife, which seals the end, preventing fraying. Ends can be secured using Ty-Rap cable ties.

- Available in handy mini spools or bulk reels
- Eight sizes from 1/8 in. (3.18 mm) to 2 1/2 in. (63.5 mm) nominal I.D. size
- Solid or wraparound hook and loop braided expandable wire sleeving
- Meets UL94V-1
- Meets Federal Motor Vehicle Standard No. FMV SS 302

Technical information

Polyethylene terephthalate (P.E.T.)


- A black polyester monofilament material
- 0.010 in. (0.25mm)
- Designed for indoor and outdoor applications
- Continuous operating temp.: -75°C to 125°C (-103°F to 257°F).

Technical information

F – Flame Retardant polyethylene terephthalate (P.E.T.)


- Selfextinguishing polyester monofilament material
- 0.010 in. (0.25mm)
- Designed for indoor and outdoor applications
- It's provided in black with white tracer for identification
- Continuous operating temp.: -75°C to 125°C (-103°F to 257°F).
- Flammability rating.: UL 94V-1

Catalogue number system

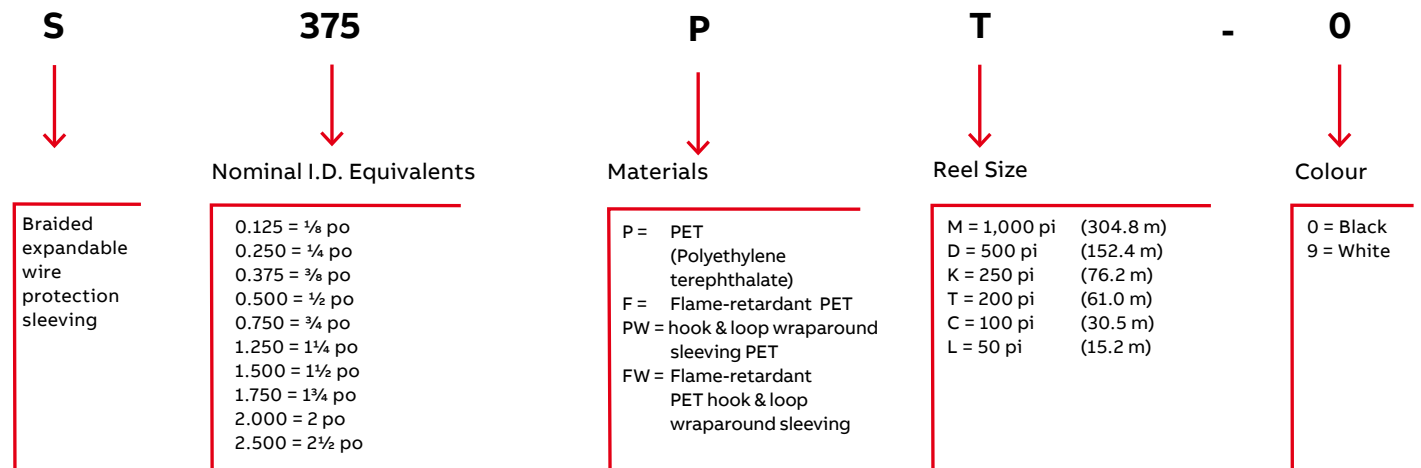

Wire protection products

Braided sleeving




P.E.T. Braided expandable wire sleeving – Mini spool



Cat. n°.	Nominal I.D.		Colour	Nominal diameter range		Spool quantity		Std. pkg.
	[mm]	[in.]		[mm]	[in.]	[mm]	[ft.]	
S250PT-0	6.4	0.25	Black	3.2 - 9.5	0.13 - 0.38	61.0	200	1
S500PC-0	12.7	0.50	Black	6.4 - 19.1	0.25 - 0.75	30.5	100	1
S750PC-0	19.1	0.75	Black	12.7 - 31.8	0.50 - 1.25	30.5	100	1
S1250PL-0	31.8	1.25	Black	19.1 - 44.5	0.75 - 1.75	15.2	50	1

NOTE: Order by spool, not per foot.




Flame retardant braided expandable wire sleeving – Mini spool



Cat. n°.	Nominal I.D.		Colour	Nominal diameter range		Spool quantity		Std. pkg.
	[mm]	[in.]		[mm]	[in.]	[mm]	[ft.]	
S250FT-0	6.4	0.25	Black with white tracer	3.2 - 9.5	0.13 - 0.38	61.0	200	1
S500FC-0	12.7	0.50	Black with white tracer	6.4 - 19.1	0.25 - 0.75	30.5	100	1
S750FC-0	19.1	0.75	Black with white tracer	12.7 - 31.8	0.50 - 1.25	30.5	100	1
S1250FL-0	31.8	1.25	Black with white tracer	19.1 - 44.5	0.75 - 1.75	15.2	50	1

NOTE: Order by spool, not per foot.



P.E.T. Hook and loop, wraparound sleeving – Mini spool



Cat. n°.	Nominal I.D.		Colour	Nominal diameter range		Spool quantity		Std. pkg.
	[mm]	[in.]		[mm]	[in.]	[mm]	[ft.]	
S500PWL-0	12.7	0.50	Black	6.4 - 19.1	0.25 - 0.75	15.2	50	1
S750PWL-0	19.1	0.75	Black	12.7 - 31.8	0.50 - 1.25	15.2	50	1
S1250PWL-0	31.8	1.25	Black	19.1 - 44.5	0.75 - 1.75	15.2	50	1
S2000PWL-0	50.8	2.00	Black	38.1 - 88.9	1.50 - 3.50	15.2	50	1

NOTE: Order by spool, not per foot.

- No tools required to close the sleeving
- Hook and loop material is made of 100% polyamide



Flame retardant hook and loop, wraparound sleeving – Mini spool




Cat. n°.	Nominal I.D.		Colour	Nominal diameter range		Spool quantity		Std. pkg.
	[mm]	[in.]		[mm]	[in.]	[mm]	[ft.]	
S500FWL-0	12.7	0.50	Black with white tracer	6.4 - 19.1	0.25 - 0.75	15.2	50	1
S750FWL-0	19.1	0.75	Black with white tracer	12.7 - 31.8	0.50 - 1.25	15.2	50	1
S1250FWL-0	31.8	1.25	Black with white tracer	19.1 - 44.5	0.75 - 1.75	15.2	50	1
S2000FWL-0	50.8	2.00	Black with white tracer	38.1 - 88.9	1.50 - 3.50	15.2	50	1

NOTE: Order by spool, not per foot.

Wire protection products

Braided sleeving




P.E.T. Braided expandable wire sleeving – Bulk reel



Cat. n°.	Nominal I.D.		Colour	Nominal diameter range		Spool quantity		Std. pkg.
	[mm]	[in.]		[mm]	[in.]	[mm]	[ft.]	
S125PM-0	3.2	0.13	Black	2.4 - 6.4	0.09 - 0.25	304.8	1,000	1
S250PM-0	6.4	0.25	Black	3.2 - 9.5	0.13 - 0.38	304.8	1,000	1
S375PD-0	9.5	0.38	Black	4.8 - 15.9	0.19 - 0.63	152.4	500	1
S500PD-0	12.7	0.50	Black	6.4 - 19.1	0.25 - 0.75	152.4	500	1
S750PK-0	19.1	0.75	Black	12.7 - 31.8	0.50 - 1.25	76.2	250	1
S1250PK-0	31.8	1.25	Black	19.1 - 44.5	0.75 - 1.75	76.2	250	1
S1500PT-0	38.1	1.50	Black	25.4 - 63.5	1.00 - 2.50	61.0	200	1
S1750PT-0	44.5	1.75	Black	31.8 - 59.9	1.25 - 2.36	61.0	200	1
S2000PT-0	50.8	2.00	Black	38.1 - 88.9	1.50 - 3.50	61.0	200	1
S2500PT-0	63.5	2.50	Black	44.5 - 114.3	1.75 - 4.50	61.0	200	1

NOTE: Order by spool, not per foot.



Flame retardant braided expandable wire sleeving – Bulk reel



Cat. n°.	Nominal I.D.		Colour	Nominal diameter range		Spool quantity		Std. pkg.
	[mm]	[in.]		[mm]	[in.]	[mm]	[ft.]	
S125FM-0	3.2	0.13	Black with white tracer	2.4 - 6.4	0.09 - 0.25	304.8	1,000	1
S250FM-0	6.4	0.25	Black with white tracer	3.2 - 9.5	0.13 - 0.38	304.8	1,000	1
S375FD-0	9.5	0.38	Black with white tracer	4.8 - 15.9	0.19 - 0.63	152.4	500	1
S500FD-0	12.7	0.50	Black with white tracer	6.4 - 19.1	0.25 - 0.75	152.4	500	1
S750FK-0	19.1	0.75	Black with white tracer	12.7 - 31.8	0.50 - 1.25	76.2	250	1
S750FK-9	19.1	0.75	White with black tracer	12.7 - 31.8	0.50 - 1.25	76.2	250	1
S1250FK-0	31.8	1.25	Black with white tracer	19.1 - 44.5	0.75 - 1.75	76.2	250	1
S1750FT-0	44.5	1.75	Black with white tracer	31.8 - 59.9	1.25 - 2.36	61.0	200	1
S1750FT-9	44.5	1.75	White with black tracer	31.8 - 59.9	1.25 - 2.36	61.0	200	1
S2000FT-0	50.8	2.00	Black with white tracer	38.1 - 88.9	1.50 - 3.50	61.0	200	1
S2500FT-0	63.5	2.50	Black with white tracer	44.5 - 114.3	1.75 - 4.50	61.0	200	1

NOTE: Order by spool, not per foot.

For other colours, lengths, sizes and materials, please Contact your Regional Sales Office.

Wire protection products

Tooling



Cat. n°.: CC120B

Characteristics

- Contoured handle resists tube crushing
- Produces no “sawdust” — no need to debur
- Lightweight, low-profile and no exposed blade when stored

Technical information

- Type: Cutting Tool
- High-carbon, Teflon® coated steel blade
- Cutting tool for all your spiral wrap, plastic pipe and PVC conduit needs up to 1¼ in. I.D.



Cat. n°.: WTBM

Characteristics

- It's recommended that the sleeving be cut with a hot knife for a straight cut and to seal the ends, which prevents fraying.

Technical information

- Type: Sleeving End Cutter/Sealer Tools
- 110 Volts-AC
- Benchmount End Cutter/Sealer Tool

