



# EP Series

All-Plastic Pictogram Exit Sign Commercial-grade, universal-mount and snap-fit

## FEATURES


The **Emergi-Lite® EP Series** is a compact pictogram Exit Sign with an all-in-one, snap-fit design. Easy to install and affordable, the **EP Series** Exit Sign is ideally suited for commercial applications, especially those in which large numbers of Exit Signs are required.

- Durable, factory white, thermoplastic housing
  - Universal mounting: wall-, end-, or ceiling-mount
  - Long-life white LED light source
  - Certified CSA 22.2 No.141-10 for pictogram safety signs
  - Two-wire universal AC input: 120 to 347VAC; two-wire standard DC input: 6 to 24VDC
  - Energy efficient – consumes less than 2.5W in AC mode and only 1W in DC-remote
  - Self-Powered model delivers standard two hours of back-up lighting
  - Optional vandal-proof shield and tamper-proof screws
  - Special wording available (CSA C22.2 No. 250.0)
- See warranty details at: [www.tnb.ca/en/brands/emergi-lite](http://www.tnb.ca/en/brands/emergi-lite)



## DIMENSIONS

Dimensions are approximate and subject to change.

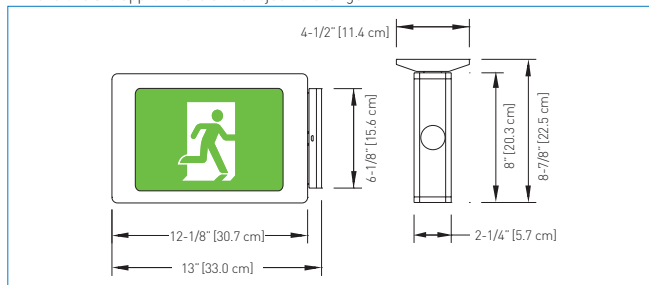

## POWER CONSUMPTION AND UNIT RATING

MODEL	AC SPECS		DC SPECS	
AC only	120 to 347VAC	Less than 2.5W	-	-
AC/DC standard	120 to 347VAC	Less than 2.5W	6 to 24VDC	Less than 1.5W
AC/Special DC	120 to 347VAC	Less than 2.5W	36, 48, 120VDC	Less than 2.5W
Two-wire 120V AC/DC	120VAC	Less than 2.5W	120VDC	Less than 2.5W
Self-Powered	120 to 347VAC	Less than 3W	Nickel-Cadmium Battery	Min. 2 hours

## ORDERING INFORMATION

SERIES	FACES/MOUNTING	ENCLOSURE COLOUR	VOLTAGE	OPTIONS
EP= plastic sign	1= single face, universal mounting 2= double face, universal mounting 3= universal face, universal mounting	B= black W= factory white	I= 120 to 347VAC; self-powered U= universal 120 to 347VAC; 6 to 24VDC U00= 120 to 347VAC only U36= 120 to 347VAC; 36VDC U48= 120 to 347VAC; 48VDC U120= 347VAC; 120VDC 24= 2-wire 6 to 24VDC 2120= 2-wire 120VAC/VDC	TP= tamper-proof screws <sup>1</sup> VR= vandal resistant shield with tamper-proof screws <sup>1</sup> U9= arrow up D9= arrow down U4= arrow up 45° D4= arrow down 45° CL= special wording  <sup>1</sup> 990.0119-E= tamper-proof bit (sold separately) Specify single or double face only.

EXAMPLE: EP1WUVR