

IP Series - LED Luminaire

AC models

IMPORTANT SAFEGUARDS

When using electrical equipment, basic safety precautions should always be followed including the following:

READ AND FOLLOW ALL SAFETY INSTRUCTIONS

1. Do not let power supply cords touch hot surfaces.
2. Do not mount near gas or electric heaters.
3. Equipment should be mounted in locations and at heights where it will not readily be subjected to tampering by unauthorized personnel.
4. The use of accessory equipment not recommended by the manufacturer may cause an unsafe condition.
5. Do not use this equipment for other than intended use.
6. All servicing should be performed by qualified service personnel.

SAVE THESE INSTRUCTIONS

Installation Instructions

1. Turn off unswitched AC power.
2. Fix the stainless steel hook brackets (6) to the ceiling at 36 inches center to center for the 4 foot fixture and 18-5/8 inches center to center for the 2 foot fixture, using the stainless steel screws provided. Make sure to use the proper anchors depending on the type of ceiling.
3. Attach the back housing (3) to the stainless steel hook brackets (6).
4. Run AC cable of rated voltage into cord grip connector (4) supplied or use sealed conduit and connectors with wire of rated voltage. Make sure you have enough wire length to reach the disconnect means (figure 2) inside the unit.
5. Connect the AC line voltage wires to the disconnect means. Line to black wire and Neutral to the white wire. Ground goes to the green wire attached to the LED gear tray (2) as shown in figure 2. Input AC voltage is indicated on the unit.
6. Snap the LED gear tray (2) to the back housing (3).
7. Put the lens cover (1) on the back housing (3) and fasten the housing clips.
8. Energize AC power. The LED strips will illuminate.

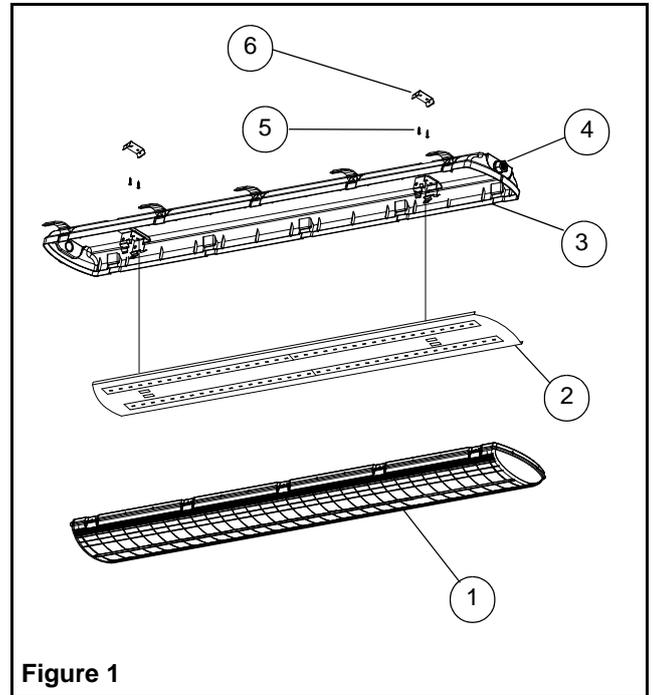


Figure 1

Part List

- | | |
|------------------|-----------------------------|
| 1. Lens cover | 4. Cord grip connector |
| 2. LED gear tray | 5. Hook bracket screws (4x) |
| 3. Back housing | 6. Hook bracket (2x) |

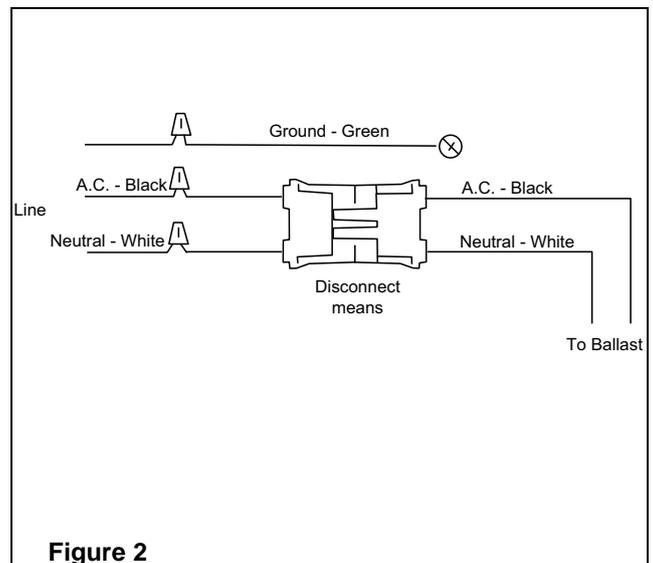


Figure 2