

RAC SERIES

Extruded Aluminum Pictogram Exit Combo Unit

FEATURES

- Solid extruded aluminum construction, painted factory white
- · Universal mounting: end, wall or ceiling
- Meets or exceeds CSA 22.2 No.141-15 standard for unit equipment and pictogram safety signs
- Legend illuminated by long-life white LED's
- Comes standard with two pictogram films per face, for direction selection
- 5W LED emergency lights provide 70' of egress illumination on a 6-foot wide path
- Sealed, maintenance-free Lead-Calcium battery
- Remote load capacity: 70' up to 350' of egress illumination when using LED remote heads
- Advanced diagnostics capabilities (specific load requirements)



TYPICAL SPECIFICATIONS

Supply and install the Ready-Lite® RAC Series combination emergency light battery unit and the pictogram Exit Sign. The unit shall be suitable for universal mounting: wall, end, or ceiling. The unit shall include a power pack made of steel and a legend housing including a one-piece extruded aluminum frame. The legend housing shall have a maximum depth of 2-1/2". The face plate(s) shall be of extruded aluminum and shall incorporate a protective clear polycarbonate panel. Each face plate shall come standard with two legend films for pictogram and direction selection. The light source shall be white light-emitting diodes (LED) and shall provide even illumination in normal and emergency operation. The power pack shall be complete unit equipment with battery charger and rechargeable battery. The battery shall be maintenance-free, sealed Lead-Calcium. In case of AC power failure the equipment shall provide minimum 30 minutes of emergency lighting. The rated DC power available for emergency lights shall be 27W or up to 80W, as specified. The emergency heads shall require no tools to adjust and aim. The heads shall be made of durable thermoplastic construction as otherwise specified. Units with "auto-diagnostic option" shall include a micro-controller circuit to monitor all the critical functions of the equipment and execute periodical tests of one minute every 30 days, 10 minutes every 6 months and 30 minutes every 12 months. In case of equipment malfunction, an LED-based diagnostic display shall generate a service alarm and indicate the cause of failure: battery, charger circuit, emergency lamps or exit sign lamps.

The equipment shall meet or exceed the requirements of CSA 22.2 No.141-15 standard.

The equipment shall be Ready-Lite® Model: ___

WIRE GUARDS


| 460.0081-RL | wall mount |
|-------------|---------------|
| 460.0060-RL | ceiling mount |

POWER CONSUMPTION

| MODEL | AC SPECS | | EMERGENCY POWER AVAILABLE FOR LAMPS | | | | | |
|------------------|-------------|----------------|-------------------------------------|------|------|------|------|--|
| | | | 30MIN | 1H00 | 1H30 | 2H00 | 4H00 | |
| pictogram module | 120/347VAC | less than 1.5W | - | - | - | - | - | |
| RAC-627 | 120/347VAC | 0.15/0.05 A | 27 | 16 | 11 | 9 | - | |
| RAC-640 | 120/347 VAC | | 40 | 23 | 16 | 13 | - | |
| RAC-1250 | 120/347VAC | 0.25/0.09 A | 50 | 29 | 21 | 16 | 8 | |
| RAC-1280 | 120/347 VAC | | 80 | 46 | 32 | 27 | 13 | |



DIMENSIONS

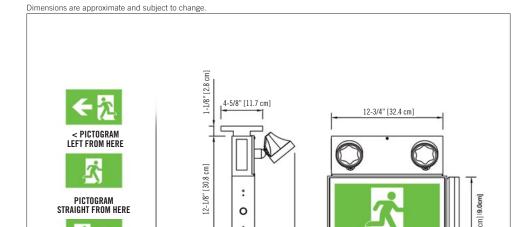

6-1/2" [16.5 cm]



RAC SERIES

ORDERING INFORMATION

PICTOGRAM > RIGHT FROM HERE

| SERIES | FACES / MOUNTING | COLOUR | POWERPACK | HEADS | HEAD STYLE AND WATTAGE | VOLTAGE | OPTIONS |
|--|---|---------------------------------|--|--|--|---|---|
| RAC= pictogram aluminum combination unit | 1= single face universal mounting 2= double face universal mounting | B= black W= factory white | 627= 6V-27W 640= 6V-40W 1250= 12V-50W 1280= 12V-80W | 1= one head 2= two heads Blank= no heads | Blank= no heads LD1= MR16 LED, 6V-4W LD2= MR16 LED, 6V-5W LD7= MR16 LED, 12V-4W LD9= MR16 LED, 12V-5W LD10= MR16 LED, 12V-6W | Blank= 120/347 VAC U2= 120/277 VAC input | AD= auto-diagnostics¹ ADN= auto-diagnostics, non-audible¹ D3= time delay (15 mins.)² D4= Arrow Down 45° D9= Arrow Down NEXRF= wireless NEXUS® system interface¹ TP= tamper-proof screws³ U4= Arrow Up 45° U9= Arrow Up 45° U9= Arrow Up 45° U9= Arrow Up 45° U9= Arrow Up ¹ Not available With 6V-72W Not all options available with NEXUS® System. Please consult your sales representative ² Available with auto- diagnostics or NEXUS® only ³ 990.0119-RL= Tamper-proof bit (sold separately) |
| | | | | | | | |

13-1/8" [33.3 cm] 14-1/2" [36.7 cm]

EXAMPLE: RAC1W6272LD1D3