



Type:	_____
Project/Location:	_____
Contractor:	_____
Prepared By:	_____
Date:	_____
Model No.:	_____

TYPICAL SPECIFICATIONS

The contractor will install the **Ready-Lite® LES18P Series** compact emergency lighting unit. The unit housing shall be made of injection moulded, high impact, corrosion resistant thermoplastic. The unit dimensions including the emergency heads shall be less than 24.1cm x 17.1cm x 12.4cm. The unit shall be rated 120VAC 60Hz input and 6VDC nominal output. The unit shall contain a fully automatic, solid-state battery charger with test switch and AC-on pilot light. The charger shall be computer tested and shall contain low-voltage disconnect circuitry to protect the battery from deep discharge.

The battery shall be maintenance-free, sealed lead-calcium and shall supply the emergency heads with power for minimum 60 minutes during an AC power failure. The unit shall include two emergency heads built of flame-retardant thermoplastic and shall include two mini-tungsten 6V-9W lamps.

The unit shall be CSA C22.2 no 141-15.

The unit shall be **Ready-Lite®** Model: _____.

WIRE GUARDS


460.0082-RL	wall mount or ceiling mount
-------------	-----------------------------

REPLACEMENT LAMPS

ORDERING CODE	LAMP TYPE	VOLTAGE/WATTAGE
570.0016-RL	mini tungsten	6V-9W

DIMENSIONS

Dimensions are approximate and subject to change.

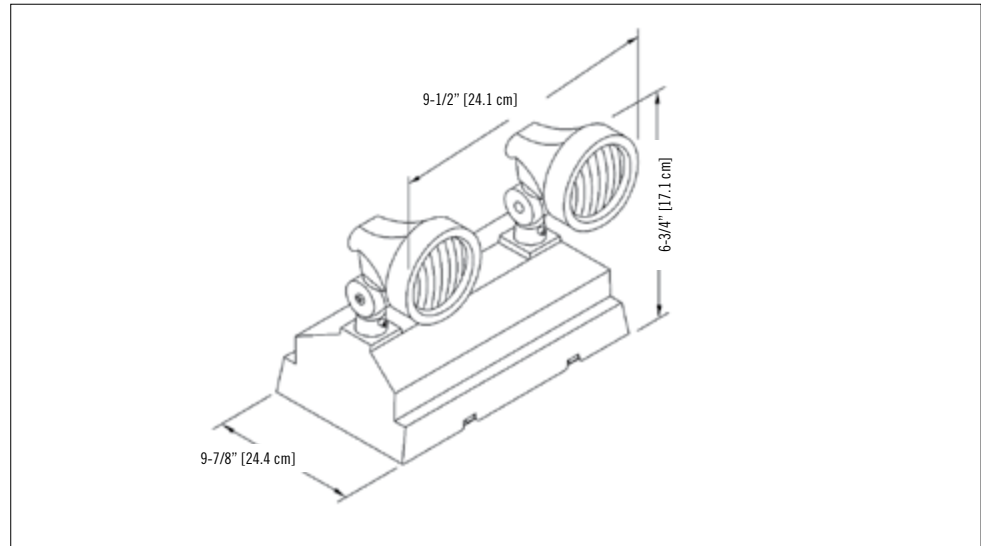

LES18P SERIES

Compact Emergency Lighting Units

FEATURES

- Compact emergency lighting unit available in factory white
- Fully automatic, solid state, voltage sensitive charger with test switch and AC-on pilot light
- Sealed dust-proof transfer relay circuit and low voltage disconnect
- Long-life, maintenance-free sealed Lead-Calcium battery
- Housing and heads constructed of injection molded, high impact, corrosion resistant thermoplastic
- 120VAC standard input
- 60 minutes run time
- CSA C22.2 No. 141-15 certified

ORDERING INFORMATION

SERIES	CAPACITY	LAMP	COLOUR	VOLTAGE
LES= compact plastic	18P= 18W	Blank= 6V-9W	Blank= factory white	Blank= 120VAC input

EXAMPLE: LES18P